



**AKG 99ER SERIES GOOSENECK MICROPHONES**

These goosenecks come with only one flexible section, a rigid connection between gooseneck and capsule and a 3-pin standard XLR connector. The metal grill is joined permanently to the gooseneck, and the contacts inside are soldered. This protects the condenser capsule against mechanical stress and electromagnetic interference, and ensures maximum reliability and excellent audio. You can choose between 12" or 20" long goosenecks, with either a cardioid or hypercardioid polar pattern.

ITEM	DESCRIPTION	PRICE
CGN99C/S	12" cardioid gooseneck, 70Hz-18kHz	149.00
CGN99C/L	20" cardioid gooseneck, 70Hz-18kHz	149.00
CGN99H/S	12" hypercardioid, 50Hz-19kHz	149.00
CGN99H/L	20" hypercardioid, 50Hz-19kHz	149.00



**AUDIO-TECHNICA PROPOINT GOOSENECK MICS** All models operate only from 9-52V of phantom power. Four models in two different lengths and two mounting styles. The PRO47 has a 5/8" thread mount and a 9' cable terminated with an XLR connector.

ITEM	DESCRIPTION	PRICE
PRO47T	12.4" thread mount	124.73
PRO47TL	15.8" thread mount	124.73
PRO49Q	13" quick XLR mount	112.26
PRO49QL	16.4" quick XLR mount	112.26
AT8153	Replacement foam windscreen	7.62

**AUDIO-TECHNICA UNIPOINT GOOSENECK MICS** Cardioid condenser gooseneck mics with UniGuard™ technology (except U855QL/U859QL). Unsurpassed immunity from radio frequency interference, and 80Hz UniSteep® filter that reduces pickup of unwanted low-frequency ambient noise. New interchangeable elements (hypercardioid, cardioid, omnidirectional and super-directional UniLine® line cardioid) offer an angle of acceptance from 90° through 360° and superior on- and off-axis response for exceptional sonic quality. A 2-stage foam windscreen yields outstanding resistance to plosives and other breath noises. The U855QL is a cardioid talk-back, paging & dispatch cardioid dynamic gooseneck mic. Interchangeable elements are for U857 mics only.

ITEM	DESCRIPTION	PRICE
U855QL	17.64" cardioid, XLR mount, w/o UniGuard™	85.71
U857AL	16.58" cardioid, 5/8" mount, uses phantom or battery power, includes power module, windscreen, flange and pass-through adapter	238.19
U857AU	16.81" UniLine® line-cardioid, 5/8" mount, uses phantom or battery power, includes power module, windscreen, flange, pass-through adapter	270.47
U857Q	14.47" cardioid, XLR mount, includes foam windscreen and shockmount	197.03
U857QL	As above but 18.94"	197.03
U857QU	19.17" UniLine® line-cardioid, XLR mount, includes foam windscreen and shockmount	224.84
U857QLU	As above but 23.74"	224.84
U857RL	16.58" cardioid, 5/8" mount, includes power module, foam windscreen, flange and pass-through adapter	201.46
U857RU	16.81" UniLine® line-cardioid, 5/8" mount, includes power module, foam windscreen, flange and pass-through adapter	233.74
U857RLU	As above but 21.38"	233.74
U859QL	18.90" cardioid, XLR mount, phantom only, w/o UniGuard™, includes windscreen	140.25
UE-C	Cardioid element, 120° pickup pattern	73.69
UE-H	Hypercardioid element, 100° pickup pattern	73.69
UE-O	Omnidirectional element, 360° pickup pattern	73.69
UE-UL	UniLine® element, 90° pickup pattern	103.41

**AUDIO-TECHNICA AT808G SUBCARDIROID DYNAMIC CONSOLE MICROPHONE** A quality talk-back microphone for entertainment, commercial and industrial applications which features a versatile gooseneck for unlimited positioning. Custom-tailored frequency response ensures excellent intelligibility in environments with excessive ambient noise.

ITEM	DESCRIPTION	PRICE
AT808G	Dynamic, subcardioid, 200Hz-5kHz, 3-pin XLR	130.31



**CAD GOOSENECK MIC** The Astac 920B is a low-noise, cardioid, condenser gooseneck mic that provides natural, articulate and transparent sound. The cardioid polar pattern minimizes feedback when used close to sound reinforcement speaker and monitors. Has durable matte-black non-reflective paint. Foam windscreen included.

ITEM	DESCRIPTION	PRICE
920B	Cardioid gooseneck mic, 150Hz-20kHz, 20-7/16" long	129.00
GSM1	Shockmount for 920B	52.52
FM-1A	Flange w/3-pin XLR stem mount	20.37
FM-2A	Locking flange mount w/3-pin XLR	9.65

**CAD VARIABLE PATTERN GOOSENECK MICS**

The 1800VP is a continuously-variable pattern condenser 18" gooseneck mic system with a remote polar control which allows the user to precisely adjust the shape of the pick-up pattern from a remote location. A 2-conductor shielded cable (max length 2000') connects the mic head and the pattern control box. The mic is designed to resist interference from cell phones and other communication devices. The 2800VP has the same features but has remote polar control through a Digital Signal Processor (DSP). Both mics are terminated with a TA3F type connector and XLRM-type connector.

ITEM	DESCRIPTION	PRICE
1800VP	18" gooseneck, 40Hz-20kHz, includes remote polar control box	549.00
2800VP	18" gooseneck, 40Hz-20kHz, DSP compatible, includes 30' shielded cable	549.00



**COUNTRYMAN ISOMAX 4 RF GOOSENECK MICS**

The lowest noise podium mic features improved RF rejection of interference from cell phones, wireless devices, and active noise cancellation to eliminate mechanical noise from either touching the mic or the surface it is attached to. The base is a standard XLR male connector, the output is balanced transformerless, a minimum of 9VDC phantom power is required. The matte black extension tube may be bent repeatedly.


ITEM	DESCRIPTION	PRICE
M4HP5RF18EB/ISOMAX-4	18" Isomax 4RF mic, hypercardioid, 70Hz-18kHz, black	289.10
M4HP5RF24EB	24" Isomax 4RF mic, hypercardioid, 70Hz-18kHz, black	289.10
M4CP5RF18EB/ISOMAX-4	18" Isomax 4RF mic, cardioid, 70Hz-18kHz, black	289.10
M4CP5RF24EB/ISOMAX-4	24" Isomax 4RF mic, cardioid, 70Hz-18kHz, black	289.10
A4STAND	Isomax 4RF stand clip	20.73
A4CDM	Isomax 4RF desk mount	20.73
A4WSB	Replacement windscreen, black	13.03



**EARTHWORKS FLEX SERIES PODIUM MICROPHONES**

These offer exceptional intelligibility, impressive impulse response, diaphragm settling time and sound quality that is not usually available in podium microphones. Their patented cardioid and hypercardioid pick-up pattern and smooth off-axis response allows an orator to move up to 90° off-axis and still be heard with exceptional intelligibility and with more gain before feedback. The flexible neck allows adjustment of microphone positioning with no handling noise. Flex Mics are intended for podium use, but they can also be used as choir or orchestra mics (when hung) and for vocals, piano, acoustic instruments and even drums. They are flat from 50Hz-20kHz within +2dB at 6" and will handle up to 145dB SPL.

ITEM	DESCRIPTION	PRICE
FM720	27" cardioid	499.00
FMR720	27" cardioid w/rigid center and flex on both ends	559.00
FM720/HC	27" hypercardioid	499.00
FMR720/HC	27" hypercardioid w/rigid center and flex on both ends	559.00
FM500	19" cardioid	499.00
FMR500	19" cardioid w/rigid center and flex on both ends	549.00
FM500/HC	19" hypercardioid	499.00
FMR500/HC	19" hypercardioid w/rigid center and flex on both ends	549.00
FM360	13" cardioid	499.00
FMR360HC	13" hypercardioid	499.00

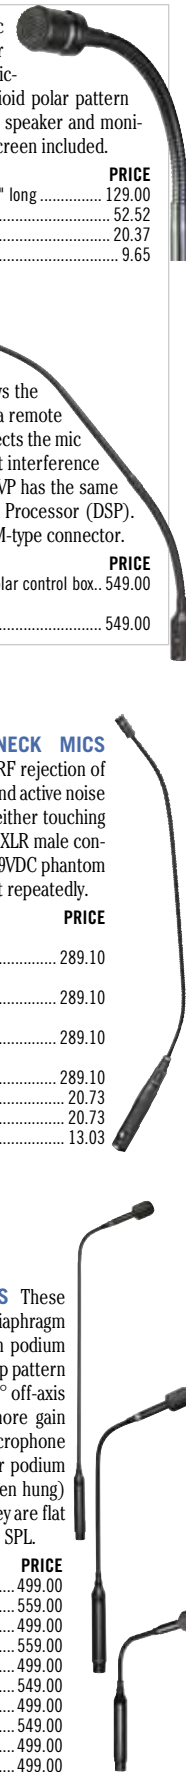



**EV POLARCHOICE GOOSENECK PODIUM MIC** Easily select from 4 polar pattern choices (omni, cardioid, supercardioid & hypercardioid). Available in 12- or 18-inch lengths, and XLR, flange mount, or PolarChoice Plus which features a push button on top of the mount and status LED.

ITEM	DESCRIPTION	PRICE
PC12/FL	12" multi-pattern gooseneck mic, flushmount	356.00
PC12/XLR	12" multi-pattern gooseneck mic, XLR-mount	336.00
PC18/FL	18" multi-pattern gooseneck mic, flushmount	356.00
PC18/XLR	18" multi-pattern gooseneck mic, XLR-mount	336.00
PC-PLUS-12	12" multi-pattern w/base switch & LED	402.00
PC-PLUS-18	18" multi-pattern w/base switch & LED	402.00

**EV RE90P ARCHITECTURAL PODIUM MIC** The RE90P is an unobtrusive podium microphone designed to pickup sounds distant or near. Dual gooseneck points allow for quick and reliable microphone positioning. Available in 12" or 18" length.

ITEM	DESCRIPTION	PRICE
RE90P-12	12" length, cardioid	282.00
RE90P-18	18" length, cardioid	282.00
CPSM	Shockmount hardware	33.00

**EV POLAR CHOICE SATELLITE WIRELESS PODIUM MICROPHONE** The PolarChoice Satellite brings the benefits of wireless to the podium. It is a freestanding gooseneck style microphone, firmly anchored in place by its base. This low-profile foundation hides PolarChoice Satellite's most powerful feature - space for a wireless transmitter. Turn the base over to reveal the specially designed compartment for housing a required Electro-Voice bodypack transmitter (sold separately). Connect the microphone to the bodypack, set up the wireless channel, and place the PC Satellite anywhere an easy-to-use microphone is required. It features switchable polar patterns, mute switch, and is available in 3 length options.

ITEM	DESCRIPTION	PRICE
PC-SATELLITE-5	5" wireless condenser gooseneck mic, 50Hz-20kHz	529.00
PC-SATELLITE-12	12" wireless condenser gooseneck mic, 50Hz-20kHz	529.00
PC-SATELLITE-18	18" wireless condenser gooseneck mic, 50Hz-20kHz	529.00
BPU-2-71887X1	RE2 series UHF bodypack transmitter, A-band	199.00
RE2-71883X1	RE2 series UHF receiver, A-band	299.00

## SAMSON

**SAMSON CM SERIES GOOSENECK MICS** These mics feature miniature cardioid condenser elements, XLR-M connectors at their base, onboard high-pass filter at 100Hz, a dual-stage, rippled windscreen, and they function on 9-52V phantom power. They include a FMS1 standard flange mount for installation, and a WS15 windscreen.

ITEM	DESCRIPTION	PRICE
CM15P	15" cardioid condenser, 60Hz-16kHz, 127dB SPL, black	89.00
CM20P	20" cardioid condenser, 60Hz-16kHz, 127dB SPL, black	99.00

## SHURE

**SHURE 515SB-G18X** All metal impact resistant screen/grille provides extra ruggedness. Momentary push to talk switch makes this the standard gooseneck microphone for the fast-food industry and applications such as supermarkets, etc. Includes 18" gooseneck/ flange mount.

ITEM	DESCRIPTION	PRICE
515BSM	With cable, push-to-talk switch, low impedance, for handheld use	101.74
515SB-GX	With push-to-talk switch, low impedance, gooseneck not included	64.44
515SB-G18X	18-inch gooseneck, push-to-talk switch, low impedance, with A13HD flange	79.13
515SB-G18XF	18-inch gooseneck, push-to-talk switch, low impedance, with A12 flange	75.74
515SDX	Dual-impedance, switch selectable, for handheld use, no cable	48.61
A1WS	Foam windscreen (gray)	6.33

## SHURE

### SHURE MX405/MX410/MX415 MINIATURE GOOSENECK MICS

These models are available in 5", 10" or 15" desktop, mounted base, wired, or wireless versions, with interchangeable capsule options. Desktop models have a programmable mute switch. CommShield™ technology ensures the MX models to be highly resistant to intense nearby radio signals. The MX890 desktop base allows you to interface these mics with compatible Shure SLX wireless systems.

ITEM	DESCRIPTION	PRICE
MX405/C	5" cardioid, bi-color indicator, w/surface mount preamp	223.83
MX405/S	5" supercardioid, bi-color indicator, w/surface mount preamp	229.49
MX405R/N	5", no cartridge, light ring indicator, w/surface mount preamp	186.54
MX405LP/C	5" cardioid, bi-color indicator, less preamp	167.31
MX405LP/S	5" supercardioid, bi-color indicator, less preamp	172.97
MX405RNP/N	5", no cartridge, light ring indicator, less preamp	130.00
MX410/C	10" cardioid, bi-color indicator, w/surface mount preamp	223.83
MX410/S	10" supercardioid, bi-color indicator, w/surface mount preamp	229.49
MX410R/N	10", no cartridge, light ring indicator, w/surface mount preamp	186.54
MX410LP/C	10" cardioid, bi-color indicator, less preamp	167.31
MX410LP/S	10" supercardioid, bi-color status indicator, less preamp	172.97
MX410RNP/N	10", no cartridge, light ring indicator, less preamp	130.00
MX415/C	15" cardioid gooseneck, includes surface mount preamp, bi-color status indicator	235.13
MX415/S	15" supercardioid gooseneck, includes surface mount preamp, bi-color status indicator	240.79
MX415LP/C	15" cardioid gooseneck, less preamp, bi-color status indicator	178.61
MX415LP/S	15" supercardioid gooseneck, less preamp, bi-color status indicator	184.27
MX415R/N	15" no mic cartridge, gooseneck, includes surface mount preamp, light ring	197.83
MX415RNP/N	15" no mic cartridge, gooseneck, less preamp, light ring	141.31
MX400DP	Desktop base for MX405 & MX410 models	179.75
MX890	Wireless desktop base, compatible with SLX series	338.02
MX400SMP	Surface mount preamp for MX405 & MX410 models	96.10
SLX1	UHF bodypack option for MX890 base only (specify band)	199.00
SLX4	UHF receiver option for MX890 base only (specify band)	380.00

**SHURE MICROFLEX GOOSENECK MICROPHONES** Ideal for lecture, pulpits and conference tables. These mini-condenser gooseneck mics offer a variety of heights and mounting styles, high sensitivity and wide frequency range. The new D versions include a desktop base with built in programmable switching capability. Other features include: interchangeable cardioid, supercardioid and omnidirectional mic cartridges, a rigid center tube for easy positioning and transformerless output for maximum immunity to electromagnetic hum and RF interference even over long cable runs.

ITEM	DESCRIPTION	PRICE
<b>Models with XLR at bottom, no cable</b>		
MX412/C	12" cardioid	178.61
MX412/S	12" super cardioid	184.27
MX412S/S	12" supercardioid with switch and LED	202.36
MX418/C	18" cardioid	178.61
MX418/S	18" supercardioid	184.27
<b>Models with 10ft. cable</b>		
MX412D/C	12" cardioid, desktop base	237.40
MX412D/S	12" supercardioid, desktop base	243.05
MX412SE/C	12" cardioid, side exit cable	191.06
MX412SE/S	12" supercardioid with side exit cable	196.70
A412MWS	Locking metal windscreen	17.91
A400SM	Shockmount systems	22.61
RK100PK	In-line preamp	113.38
RK412WS	Snap-fit windscreen (4-pack)	18.53
A412B	Desktop microphone base	63.37
R183	Omni replacement cartridge	32.54
R184	Supercardioid replacement cartridge	52.57
R185	Cardioid replacement cartridge	45.06

**SHURE 503BG DYNAMIC GOOSENECK MIC** Developed for computer voice recognition applications, this microphone offers excellent voice fidelity while reducing background noise. Also useful in other close-talking applications such as paging and talkback. It has a low-impedance, moving coil transducer with an integral humbucking coil and attached 2-conductor shielded cable with built-in strain relief. It has a frequency response of 100Hz-7kHz with constant output voltage over the voice spectrum when used close to the sound source. It has a black finish and mounts to a gooseneck (not included), a fixed pipe or a microphone stand using a standard 5/8"-27 thread.

ITEM	DESCRIPTION	PRICE
503BG	Cardioid dynamic mic, for gooseneck mounting	84.78
G27B	27" gooseneck, black	19.79
G18	18" gooseneck, chrome	16.00



#### COMPUTER AV



#### ACCESSORIES



Follow us!

**PRICES SUBJECT TO CHANGE WITHOUT NOTICE. Call today or visit us online!**



## VERSATILITY



Combining sleek, low profile aesthetics and a comprehensive selection, Microflex® microphones include the highest standard of quality and efficiency for installed audio applications. Developed primarily for AV conferencing installations, these models were designed with your needs in mind:

- Wired and Wireless functionality for unprecedented placement flexibility
- Low profile button, gooseneck and boundary models to fit any room aesthetic
- CommShield® Technology for RF Filtering against GSM devices
- Legendary Shure performance and reliability

Look to Microflex for your next microphone installation, with the confidence of the superior sound quality, reliability and durability you only get from Shure.



**FULL COMPASS**  
PRO AUDIO | VIDEO | AV | LIGHTING  
MUSICAL INSTRUMENTS  
**800-356-5844**  
FULLCOMPASS.COM

**SHURE**  
LEGENDARY  
PERFORMANCE™

© 2011 Shure Incorporated