

SANYO ULTRAMOBILE ECONOMY PROJECTORS These portable XGA

(1028x768) or full widescreen (1280x800) models are equipped with wired or wire-

less networking interface. These projectors have an "Easy Setup Function" which includes Automatic Vertical Keystone Correction for screen distortion elimination, Auto Input Signal Search and an Input Guidance Function that assists in setting up the projection screen display. They feature a 7W speaker (except for PLC-WXU300/ WXU700A), 40"-300" image size, 500:1 contrast ratio, and can be turned off without the need to cool down. Both the WXU700AWXU300 feature HDMI and USB connectivity and the WXU700A also features high-speed 802.11n wireless LAN, with video stream-

							ir orooo za ir ij iritir iradoo otir ouiir	
ing & V	ing & Windows Vista Network Projector Function.							
3	2600/3010/350A							
_								
С	(:::::)	(::)		\odot		(::)		
	•••••	<u> </u>				<u> </u>		
					305A/35	54		
_	$\overline{}$	\sim	_					
<u> </u>	(******)	(::)				\odot	(::: 	
ШШШ	•••••	<u> </u>				<u> </u>	<u>•••••••</u>	
				YII	1300A/XI	17004		
_		_	_					
~~~	(:::::)	$\odot$				$\alpha$		
	·····	$\odot$				w.		
		DE0	0 D I D T I				DDIOF	
ITEM		DF2	CRIPTI	JN			PRICE	
PLCXD2	2600	XGA	(1024 x)	768) project	tor. 260	0 lumen	is, wired network interface 595.00	
PLUXK	SU I U	XGA	(1024 X)	/68) project	or, 300	v iumen	is, wired network interface 795.00	

PLCXU305A	XGA (1024 x 768) projector, 3000 lumens, wired/wireless network interf	ace 1295.00
PLCXU350A	XGA (1024 x 768) projector, 3500 lumens, wired network interfa	ace 995.00
PLCXU355A	XGA (1024x 768) projector, 3500 lumens, wired/wireless network inte	rface . 1495.00
PLCWXU300A	WXGA (1280 x 800) projector, 2500 lumens, wired network inte	rface 935.00
PLCWXU700A	WXGA (1280 x 800) projector, 3800 lumens, wired/wireless	
	network interface, HDMI	2295.00
610-345-2456	Optional lamp for PLC-WX250	132.35
610-343-2069	Optional lamp for PLC-XU300A/305A/355A/PLC-WXU300	218.66
610-333-9740	Optional lamp for PLC-WXU700A	356.78

....Master software for PLC-WXU700A ...

### SANYO PLC-XP200L XGA PROJECTOR

POA-PINMO1

WITH QUADRIVE It features an optical engine that improves on conventional 3 LCD systems. By controlling the yellow light independently through a 4th LCD, color purity is increased by approximately 20% compared



... 1438.59

this projector's predecessor – the PLC-XP100. Its high-output single lamp system yields 7,000 lumens of brightness and it can be installed at any angle to allow ceiling or floor image projection. And a filter sensor automatically advances a clean filter surface when the existing one is dirty. Unit ships without a lens but uses standard XP series lenses. Call for more information about available lenses. The optional PJ-Net Organizer Plus II card enables management/control via a LAN, and monitoring function added by CMOS camera.

		<u>→</u> ©
ITEM	DESCRIPTION	PRICE
PLCXP200L	QuadDrive (4LCD) engine, XGA (1024x768) projector,	
	7000 lumens, 2200:1 contrast ratio, no lens	CALL
POA-PN03C	Optional PJ-Net Organizer Plus II w/camera -	
	no additional software required	517.89
	•	

#### PLC-WTC500AL SANYO WXGA MULTIMEDIA PROJECTOR With WXGA (1280x800) projection, it is possible to project high-quality HD images from nearly any location. It offers an auto lamp selection system (2x 330W) that automatically chooses which



lamp to use, making it maintenance-free for about 6000 hours. It offers easy maintenance with an Active Maintenance Filter (AMF) system up to 10,000 hours. It features Picture-in-Picture and Picture-by-Picture functions. Other features include vertical/ horizontal lens shifting, keystone correction, 360° projection, and more. Inputs include HDMI, D-Sub15 (RGB), 5x BNC (RGBHV/Video/Y-Pb/Cb-Pr/Cr), RCA (composite), & Mini DIN 4 (S-Video). Audio inputs include 3.5mm stereo jack & 2 x RCA (R/L mono), plus 3.5 mm stereo jack output. Also D-Sub15 monitor out, control inputs D-Sub9 (RS232), USB type B, 3.5 mm stereo jack (cable remote control), & D-Sub25 for PJ-Net Organizer. Includes IR/cable remote control with laser pointer and mouse function, batteries, power cable, USB cable, D-Sub15 cable, & PIN code label.

·····		5	•	••			•	0
ITEM		DESCR	IPTION					PRICE
PLCWTC50	OAL	WXGA	projecto	r, 5000 lum	ens, 300	0:1 contrast, no I	ens	CALL
LNS-S11		Standa	ard lens,	1.6 - 2.1 :1	throw ra	atio		552.42
LNS-W10		Wide z	oom lens	, 1.2 - 1.6	1 throw	ratio	1	1651.74
LNS-W11		Wide z	oom lens	, 0.8 :1 thre	ow ratio.		1	1872.71
LNS-T10		Long z	oom lens	, 2.1 : 3.4 :	1 throw r	atio	1	1651.74
LNS-T11		Long z	oom lens	, 3.4 - 5.4	1 throw	ratio	1	1872.71

PLC-XC56 SANYO XGA ULTRAMOBILE MULTIMEDIA PROJECTOR This small footprint projector weighs about 9lbs, but is bright enough for contractor installation. Features include built-in 7W



speaker, closed captioning (NTSC), active maintenance filter system, black board mode/color board mode for educators, security bar that allows up to 0.4" security cables, vertical keystone correction of +/-20°, and much more. The PLCXC56 has a 4:3 aspect ratio, a throw distance of 4.6'-41.7', and diagonal image size of 40"-300". PC/Video inputs include RCA (Composite), Mini DIN 4-pin (S-Video), D-sub 15 (RGB, Component). Audio inputs include 2x stereo mini iack & 2x RCA. Outputs include D-Sub15 & stereo mini jack (variable audio). PLCXC56 also has a built-in network control with wired LAN (RJ45).

	<u></u>		left	lacktriangle			
ITEM	DESCRIP	TION					PRICE
PLCXC56	3100 lume	ns XGA LCI	) projector	, 4:3 450:1 conti	rast ratio, n	etwork control	1119.00
610-339-8600	Replacem	ent lamp					212.91

### SANYO PDGDHT-8000L FULL HD DLP MULTIMEDIA PROJECTOR Designed to handle full HD (1920 x 1080) resolution

image projection with attention to detail for demanding applications like design or CAD. They have a 16:9 aspect ratio and 7,500:1 contrast ratio. Other features include 24/7 lamp interval function for reducing lamp deterio-

ration and active maintenance filter for cleaner, longer durability and dust-free optical engine. Includes rich color reproduction color wheel set, wireless (wired incl.) remote control, cable cover, removable power cord, D-sub computer cable, Real Color Manager Pro CD-ROM, lenshole cover, PIN code-locking seal. Choose from a number of Sanyo lenses (lens not included). Optional HD data wireless adapter (WLAN-module) enables wireless data transmission of up to 98ft.

ITEM	DESCRIPTION	PRICE
PDGDHT8000L	. HD multimedia projector, 8000 lumens, no lens	CALL
POA-MD26HDWL	. Optional HD data wireless receiver board	684.78
LNS-S51	. Standard zoom, motorized zoom/focus, f2.0-f2.7 aperture,	
	38.5mm-60mm focal length	2204.16
LNS-T51	. Ultra long zoom, motorized zoom/focus, f2.3-f3.2 aperture,	
	101.3mm-168.8mm focal length	
LNS-W50	. Wide-angle zoom, motorized zoom/focus, f2.0-f2.1 aperture,	
	31.9mm-38.3mm focal length	CALL

# SANYO PORTABLE MULTIMEDIA PROJECTORS One of the bright-

est family of projectors available, with interchangeable lenses, and featuring high quality images. The PLC-XM100



ratio. They have a throw distance of 4.3' to 75.1' and a projection image (diagonal) of 40" to 400". The PLC-ZM5000 is a 5000 lumen unit with WUXGA (1920x1200) resolution, 2000:1 contrast ratio. Other features for all models include horizontal/vertical keystone correction and horizontal/vertical lens shift. Inputs include

DVI-D (HDCP), D-sub, composite, component & S-video with audio on RCA & stereo mini jack (PLC-ZM5000L has mini jack only). The PLC-ZM5000L adds an HDMI input. Outputs include D-sub for video and stereo mini jack for audio. They also have RJ24 for wired LAN and USB (type B) for mouse control. (NOTE: L models do not include a lens, allowing you to choose from short to ultra long zoom lenses.)

ITEM DESCRIPTION	PRICE
PLCXM100 5,000 lumen projector, 21.3lbs	2995.00
PLCXM100L 5,000 lumen projector, without lens, 19.6lbs	2595.00
PLCXM150 6,000 lumen projector, 21.3lbs	CALL
PLCXM150L 6,000 lumen projector, without lens, 19. lbs	CALL
PLCZM5000L 5,000 lumen projector, without lens, 21.3 lbs	CALL
LNS-W21 Short fixed lens	1872.71
LNS-W20 Short zoom lens	1651.74
LNS-S20 Standard zoom lens (standard on PLC-XM100/150)	552.42
LNS-T20Long zoom lens	1651.74























































**FULLCOMPASS.COM** 

PLCXM150L















































SANYO LARGE FIXED INSTALLATION **PROJECTORS** Features include very high brightness (multi-lamp system), digital progressive scan/signal process-



ing for improved video detail, RS232 I/O and interchangeable lenses. Ideal for permanent installations in houses of worship, presentation/meeting halls, large conference rooms or multimedia centers. They also feature high-resolution imaging, remote control, power zoom/focus/tilt, USB port. P.I-Net Organizer option, and efficient lamp power management.

port, to rice orac	anaci option, und c	THE TOTAL	power manage	Jiii Ciit.	
		) <b>5</b>		•	0
ITEM	DESCRIPTION				PRICE
PLCXF47	15,000 lumens, XC	A (1024x768)	2000:1 contrast i	ratio, no lens	CALL
PLCXF1000	12,000 lumens, XC	A (1024x768)	4000:1 contrast i	ratio, no lens	CALL
POA-MD13NET2	Optional PJ Net O				
	software required				402.80
LNS-T10	Long zoom lens o	otion, power z	oom, 2.12-3.39:1	throw ratio	1651.74
610-334-6267	Replacement lam	p for PLCXF47	'		368.28
610-341-9497	Replacement lam	p for PLCXF71	/F1000		379.79

SANYO PLC-XTC5OAL PORTABLE MULTIMEDIA PROJECTOR Great for continuous operation, it can automatically switch lamps (relay mode) or rotate between 2 lamps (alternating mode) so no lamp maintenance is necessary for




approximately 6000 hours. An active maintenance filter (AMF) system means a sensor automatically advances a clean filter surface when the existing one is dirty. Other features include vertical/horizontal lens shifting, keystone correction, 360° projection, USB connector, PJ-Net organizer connector, and more. I/O includes DVI-D, RGB (D-Sub15), RGBHV (5x BNC), Composite (3x RCA), S-video (4-pin mini DIN), monitor out (D-Sub15), audio outs (1/8" TRS & 2x RCA) and remote control (RS232C). When installed on a ceiling, remote control from directly below is possible. Includes wireless remote control, power cord, USB cable, and computer cable. Extensive network control and functionality are possible with the addition of the POA-PNO3C PI-Net Organizer

	e TON THOSE IS NOT OF SURE CIT.	_
<b>::::::::::::</b>		<b>→</b> ◎
ITEM	DESCRIPTION	PRICE
PLCXTC50AL	5000 ANSI lumens, XGA (1024x768), 4:3 aspect ratio,	
	1100:1 contrast ratio, no lens	CALL
POA-PN03C	PJ-Net Organizer Plus II network module w/camera –	
	no additional software required	
610-342-2626	Replacement lamp	379.79
LNS-S11	Standard zoom lens option, power zoom, 1.6-2.1:1 throw ratio	552.42

SANYO PLCWL2500 SHORT THROW PROJECTOR Projects a full 80" diagonal HD image from a distance of only 34". Features full WXGA resolution (1280 x 800, 16:10). Includes wired network capability, blackboard and color board modes, closed captioning and nearly maintenance-free operation. Call for more information

				<u> </u>		
شش	<b></b>	(1)	ullet		$\odot$	لـزننننننيـا
ITEM	DE	SCRIPTION				PRICE
PLCWL2500	W	KGA (1280 x 80)	0), 2500 lum	ens		995.00
640-349-08	47Re	placement lam	p for PLCWL2	2500		281.96
		•	•			



# **HIGH-END PROJECTORS** These

projectors feature Sony's 3LCD BrightEra Panel technology for more accurate color rendition, higher brightness and longer lifespan. The



ultra-high resolution WUXGA (1920x1200) format delivers incredible image quality. Both models feature horizontal and vertical lens shift, interchangeable lenses, synchronized lamp/filter replacement, side-by-side image projection, DICOM GSDF simulation for medical communication applications, user panel alignment and color matching. The VPL-FH500 is brighter, has an auto-switching dual lamp capacity and higher contrast ratio

	capacity and inglier contrast ratio.				
		<b>:</b>			
ITEM	DESCRIPTION	PRICE			
VPLFH30	Projector, 4300 lumens, WUXGA (1920x1200), 2000:1 contrast ratio	3137.10			
VPLFH500L	Projector, 7000 lumens, WUXGA (19020x1200), 2500:1 contrast ratio	CALL			
VPLLZ1024	Mid-focus zoom lens for the VPLFH30	2018.02			
VPLLZ4025	Mid-focus zoom lens for the VPLFH500L	CALL			

### SONY COMPACT ECONOMY PROJECTORS

These projectors are compact and light enough to be carried anywhere and are ideal for an education setting. They are feature-rich with 6 different picture modes, front exhaust, monitor out, RS232C control capability, and the convenient "power off and go" feature. They can

project images measuring up to 400" diagonally, and have vertical lens shift capability. They can accept NTSC, PAL, SECAM and

HDTV up to 720p and 1080i. Connectivity for all models includes S-Video (mini DIN 4-pin), RGB Component (HD D-sub 15 pin), audio in (1/8" TRS), monitor out (mini D-sub 15-pin), and audio out(1/8" TRS). The VPL-EW7 adds WXGA widescreen display and an HDMI input.

diopidy dire dir i	ibiii iiiput.	VPLEW/			_
	<b></b>	<b>(1)</b>	ledow		
		EX100/EX120			
<b></b>		ledow	•	$\mathbf{O}$	•••••
ITEM	DESCRIPTION				PRICE
VPLEW7	Projector, 2000 I	umens, WXGA (128	0x800), 16:10,	6lbs 10oz	647.74
VPLEX100	Projector, 2300 I	umens, XGA (1024)	x768), 4:3, 7lb	3	476.29
VPI FX120	Projector 2600 I	umens XGA (1024)	(768) 4-3 7lb		565 19

### **ADVANCED** INSTALLATION PROJECTORS

These powerful installation projectors feature 4000/4500 lumen brightness, 3LCD technology, and SXGA+/WXGA resolution. They feature dynamic detail enhancer



(DDE) for high-quality video images, 12-bit 3D Gamma Correction and 3D digital comb filter, and a digital keystone adjustment of up to ±30°. They have installation flexibility with power zoom, focus, shift and easy maintenance features like accessible lamps and filters. They have network control/presentation with content delivery via RJ45, twin stacking capability, and direct power on. They accept a wide variety of input signals, including HDMI, component and composite video, S-video (Y/C), and computer signals up to UXGA. Includes standard focus zoom lens, 1.875 to 2.38:1, x1.3 zoom. The "L" models don't come with a lens, allowing you to choose one for your specific application.

ITEM DESCRIPTION PRICE
VPLFE404000 lumen LCD projector, SXGA+ (1400x1050), includes standard lensCALL
VPLFE40LAs VPLFE40 w/out lensCALL
VPLFW414500 lumen LCD widescreen projector, WXGA (1280x800),
includes standard lens
VPLFW41LAs VPLFW41 w/out lens
LMPF270Replacement lamp for VPLFE40, VPLFW41
Lenses
<b>VPLL1008</b> Fixed short focus lens, 0.78:1 throw ratio, no zoom
VPLLZ1014Short focus zoom lens, 1.4:1 to 1.875:1 throw ratio, x1.38 zoom 2018.02
VPLLZ1024Middle focus zoom lens, 2.38:1 to 3.26:1 throw ratio, x1.45 zoom 2018.02
<b>VPLLZ1032</b> Long focus zoom lens, 3.24: to 4.95:1 throw ratio, x1.60 zoom
































# **Projecting Auditorium Solutions**

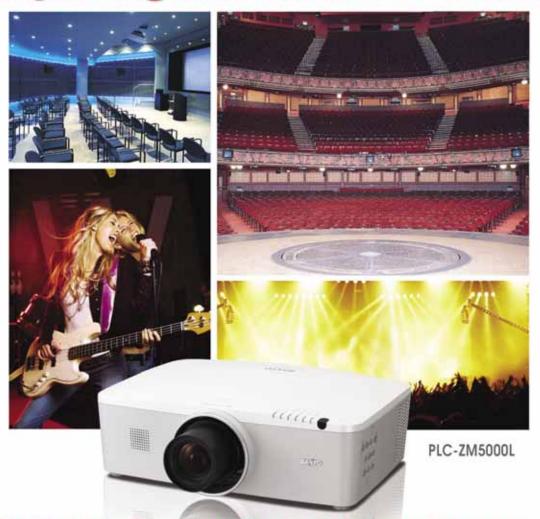

# FREE on-site evaluation of your current situation!



Give our experts at SANYO a call, and we'll evaluate your current presentation situation FREE.



# SANYO... the solution provider for the most demanding auditorium needs.

Are your presentations out of focus, fuzzy, hard to read, or just not bright enough? Maybe you are having trouble connecting to your current projector?

If you answered yes to any of these issues, give the Presentation Experts at SANYO a call and we will provide a FREE on-site no obligation evaluation of your current presentation situation! We will advise you of the common problems and errors and offer suggestions on how you can improve your presentation

Solutions like SANYO's PLC-ZM5000L, an ideal auditorium High Definition projector with 5,000 lumens, ensure bright beautiful big-screen projection. This projector also features a new optical engine with an Inorganic Liquid Crystal panel and Active Maintenance Filter (AMF) system for higher reliability and lower maintenance costs.

SANYO. . . Providing More Projector Solutions



Call today or visit our website for more information on SANYO's full line of critically-acclaimed projectors.















































SONY VPLFW300L These ultra-quiet fixed installation, business projectors are ideal for large classrooms, mid-size auditoriums, boardrooms, and for all types. Five lens options are available with throw ratios from 0.9 to 8.0:1 with no gaps. There is also a shor- throw fixed lens for mirrored



or rear screen applications. The two low wattage (275W) opposed lamps design allows the projector to be tilted freely in the vertical axis. It features tool free lens and filter changes, and lamps and long lasting electrostatic filters are easily accessible. When installed upside down, the image is automatically flipped. They have network capabilities for delivering presentations and performing maintenance over an IP network

nance over	all II lietwo	IK.					
	<b></b>	<b>(ii)</b>	<b>5</b>	ledow	€	111111111	
ITEM	DESC	CRIPTION				PRIC	Έ
VPLFW300L	WXG/	A (1366 x 800	)) resolution,	7000 lumens		CAI	LL
VPLFH300L.	2K x	1K Resolution	ı (2048 x 108	0), 6000 lum	ens	CAI	LL
Accessorie	es .						
PAM400EXP	Exter	ision Pole For	PAM400			140.9	99
VPLLZ4019.	Stano	dard Focus Zo	oom Lens for	the VPL-FH30	OL and VPL-F	N300L 2942.9	<del>)</del> 4
VPLLZ4025.	Midd	le Focus Zoor	n Lens for VP	L-FH300L and	J VPL-FW300L	CAI	LL
LMPF271	Spare	e lamp for VP	L-FH300L an	d VPL-FW300	L	619.1	16
VPLLZ4015.	Short	Focus Zoom	Lens for VPL-	-FH300L and	VPL-FW300L	CAI	LL
VPLL4008	Short	Fixed Focus	Lens for VPL-	FH300L and \	/PL-FW300L	CAI	LL
PAM400	Ceilir	ng Mount-VPL	FH300L/FW3	00L		177.3	34
						879.8	
VPLLZ4045.	Long	Focus Zoom	Lens for the \	/PL-FH300L a	nd VPL-FW30	DLCAI	LL

## SONY INSTALLATION PROJECTORS

These projectors feature 1024x768 XGA resolution (750 TV lines video), and high contrast ratios. Their ECO-friendly longer lamp life means less energy consumption & cost. They integrate into any installation



with network capability, lens shift function, plus an interchangeable lens system. They accept HD signals and have 12-bit 3D Gamma Correction. Ins/outs include S-Video in, composite video in, analog RGB/component in (HD D-sub 15-pin), 5 BNC in, digital in (DVI-D 24-pin), LAN connection (RJ45), monitor out, variable audio out, & remote control (RS232C & Control S). Includes remote commander, 2 AA batteries, power cord & cable clamp.

	( <b>:::::</b> )	<b>(!)</b>	<b>5</b> )	ledow	•••••	
ITEM	DESCRI	PTION	•	_		PRICE
VPLFX30					vide zoom lens,	
						2027.05
VPLFX35					vide zoom lens,	
						2769.09
VPLFX500L	7000 lu					
VPLLZ1024					ange w/throw ra	
VPLLZ1032	Optional	l projection le	ens, long focu	s zoom w/thi	row ratio 3.2:1 to	5.0:1 2018.02

#### SONY PORTABLE BUSINESS

**PROJECTORS** These projectors use the BrightEra 3 LCD panel system for bright, natural projected images which are easier on the eyes. All models can project images up to 300", and feature digital zoom, picture mute, RS232C control capability,



and a monitor out jack. The VLP-EX145 & 175 are XGA, with a 4:3 aspect ratio, 1024x768 resolution, 4000:1 contrast ratio, closed captioning, front vent and the convenient power off and go feature. The VPL-WC125 is a WXGA projector, with a 16:10 widescreen aspect ratio, 1366x800 resolution, network capability, and 500:1 contrast ratio. I/O on all models include RGB/Y PB PR in (Mini D-sub 15-pin), S-video in (mini DIN-4-pin), audio in jacks (1/8"TRS), monitor out (Mini D-sub 15-pin), audio out (1/8"TRS). The VPL-CW125 also has composite video outputs (3x RCA) and an RJ45 ethernet jack.

<u></u>		<b>(</b>	lacktriangle	€	
ITEM	DESCRIPTIO	N			PRICE
VPLEX145	XGA (1024x7	'68) projector, 3	3100 lumens		698.54
				etwork capability	
LMPC200	Lamp for VP	LCW125			335.50

#### SONY **ULTRA-PORTABLE BUSINESS PROJECTORS**

These LCD projectors have 2500 ANSI lumens, anti-theft functions and automatic setup. They fea-



VPLDX15

ture native 4:3 format, 350:1 contrast ratio, 3 LCD panels, 40"-300" diagonal screen size, off & go fan cooling, image flip, 4x digital zoom, +/-20° keystone adjustment, and 6 picture modes. They can accept NTSC, PAL, SECAM, and HDTV up to 1080i and 720p. Connectivity includes VGA, composite video, S-video, and 1/8" stereo audio. The VPL-MX25 adds wireless networking functions and USR file viewer

	o wireless networking function	is and obb inc viewer.	
·····		•	
ITEM	DESCRIPTION		PRICE
VPLMX20	XGA (1024x768) projector, 250	O ANSI lumens	1606.65
VPLMX25	XGA (1024x768) projector, 2500 AN	SI lumens, wireless networking	1841.62
LMPM200	Replacement lamp for VPLMX2	0 and VPLMX25	335.50

SONY MOBILE PROJECTORS The VPL-DX projectors are ideal for meeting places and presentation. They feature a tough magnesium body, have a compact and lightweight design (4.3lbs), and are perfect for mobile and desktop usage. They feature 2500 to 3000 lumens, 3 LCD technology and

XGA resolution. They have network functions via RJ45 and wireless (VPLDX15 only), plus a USB file viewer. They also include composite, S-video, D-sub and RGB inputs.

·····	<b>(</b>	ledot	
ITEM	DESCRIPTION		PRICE
VPLDX11	XGA (1024x768) projector, 300	O ANSI lumens, USB, LAN	1035.12
VPLDX15	XGA (1024x768) projector, 3000	) ANSI lumens, USB, wireless/wire	d LAN1295.48
LMPD200	Replacement lamp		335.50

SONY VPL-VWPR01 HD HOME CINEMA PROJECTOR Delivers an NEW!

immersive cinematic experience and full HD 1080p resolution at a great value. Three SXRD micro-display panels work with



digital video processor to display life-like images that no flat panel HDTV can match. A 200W lamp gives amazing performance in rooms with ambient light from lamps or windows, and Advanced Iris 3 technology delivers a 85,000:1 contrast-ratio by automatically optimizing picture brightness on a scene-by-scene basis. Input connections include component video (Y/Pb/Pr, RCA/HD D-sub 15-pin), composite video (RCA), 2x HDMI, RS232C (D-sub 9-pin) and S-Video (Y/C mini DIN 4-pin). Other features include a 1.6x zoom lens, adjustable lens shift, noise reduction functions, BRAVIA sync, RS232C connectivity and 24p True Cinema technology.

			lacktriangle	ledow	•••••
ITEM	DESCRIPTION	N			PRICE
VPLVWPR01	Full HD Home	e Cinema Pr	rojector		3499.99

SONY VPL-VW90ES FULL HD 3D PROJECTOR With an outstanding 3D picture and a wide range of innovative Sony technologies, this projector



Quality SXRD panel technology, it delivers a vibrant, bright 3D picture to screens up to 300". The system uses frame-sequential projection and IR LED-switching glasses to deliver an immersive, natural home 3D experience. 2D performance isn't compromised and 2D sources can be converted to 3D using Sony's advanced real-time conversion technique. Input connections include 3D Sync (1x RJ45), Component Y/ Pb/Pr (13xRCA & 115-Pin HD), composite, HDMI (x2) and PC Video. Other features include a 200W high pressure lamp, BRAVIA® Engine 2 processor, Advanced Iris 3 function, Motionflow 240Hz Panel Drive, 24p True Cinema technology, ARC-F lens, noise reduction functions, anamorphic zoom mode, panel alignment function, RS232C control capability and motorized lens shift.

	· (:::::)	<b>(ii)</b>	ledow	•••••	
ITEM	DESCRIPTION				PRICE
VPLVW90ES	3D HD Home Cir	nema project	or		CALL
TDGBR100/B	3D glasses, blad	k			149.99
LMPH201	Replacement lai	mp			369.00

























