


All models feature 0° - 30° adjustable tilt.

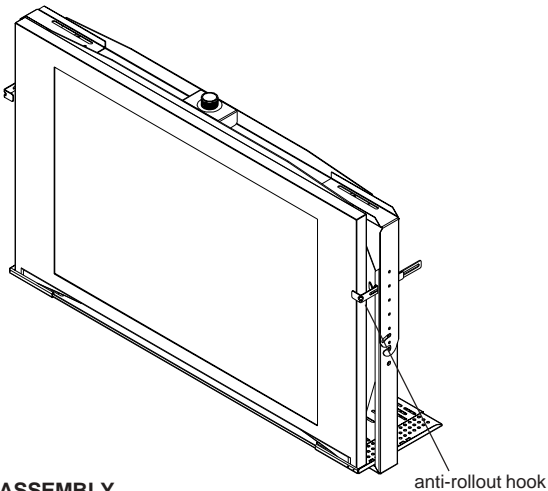

FINISHED ASSEMBLY


The **DLP50 and DLP60** are yoke style TV Mounts which surround and clamps the TV or monitor. Several models are available for 42" (1067 mm) to 65" (1651 mm) rear projection DLP's.

DLP50 and DLP60

- Adjustable tilt - 0° - 30°
 - Heavy gauge steel construction
 - Scratch resistant black fused epoxy finish
 - Design surrounds and clamps the TV for maximum stability
 - Models available for 42" to 65" rear projection DLP's
 - Hardware for attachment to mounting fixture (wallarm or ceiling plate) included
 - Security fasteners available (accessory #ACC 502)
- For dimensions, weight, and shipping weight see pages 2 through 4.

Architects specifications:

The DLP Mounting Bracket shall be a Peerless model _____ and shall be mounted where indicated on the plans. It shall feature adjustable height and width with hook rollout protection devices. It shall be constructed primarily of 12+ gauge cold rolled steel and finished in black or silver fused epoxy. Assembly and installation shall be done according to the instructions provided by the manufacturer.

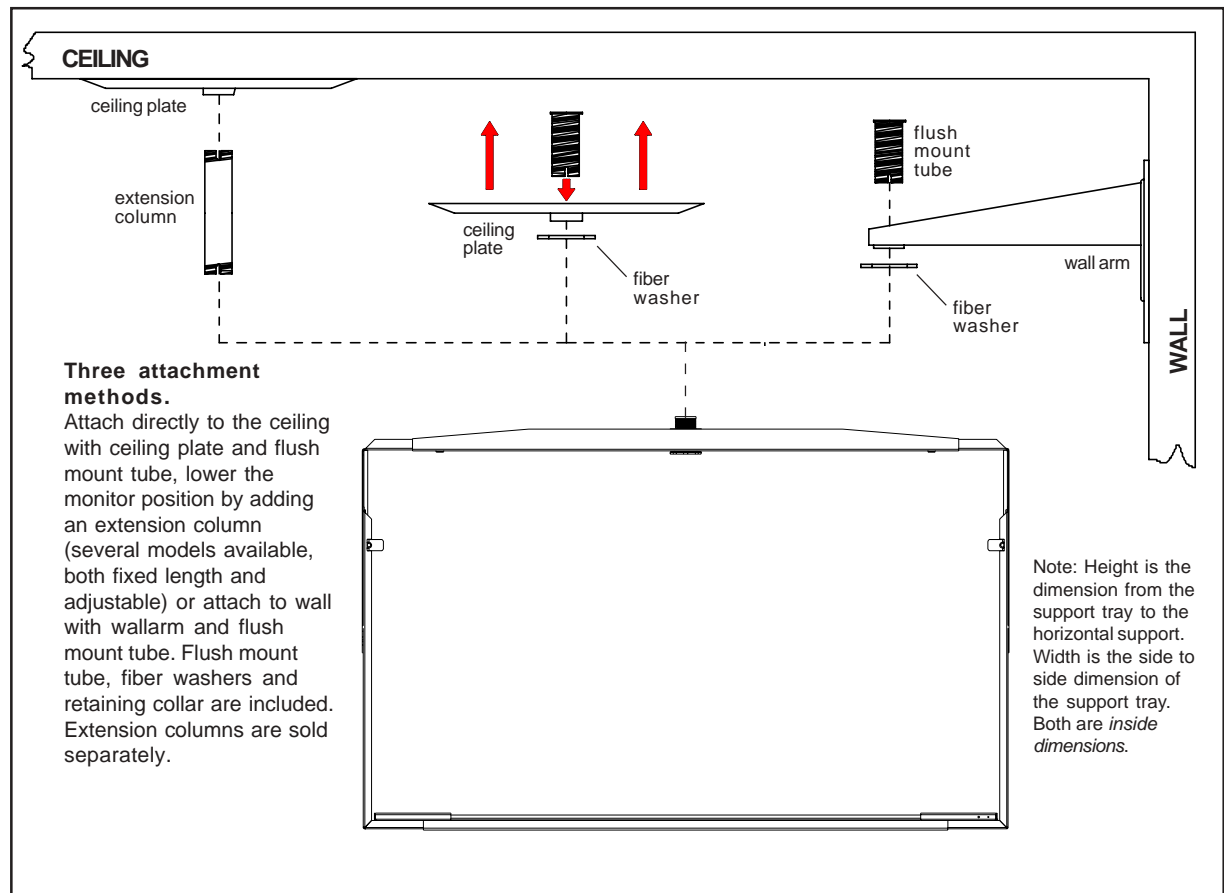

Security

Fastener Kit

Each DLP50 and DLP60 is assembled with M10 socket head screws. For added security order **ACC 502 or ACC 502S** M10 Penta-pin™ security screw kit.

TECHNICAL DATA SHEET

JMC-DLP50, JMC-DLP50S, JMC-DLP60, JMC-DLP60S, JMW-DLP50, JMW-DLP50S, JMW-DLP60, JMW-DLP60S

Peerless Industries, Inc.

3215 W. North Ave.
Melrose Park, IL 60160
www.peerlessmounts.com


phone: (708)865-8870
fax: (708)865-2941

ISSUED: 08-30-05 SHEET NO:124-9578-1


SPECIFICATIONS									
Mount					TV / Monitor			Product Peerless rated when attached to...	
Shipping Weight	Model Number	INSIDE DIMENSIONS		Support Tray Depth	Diagonal Screen Size	Screen Aspect Ratio	Depth	Wall Arm	Ceiling Plate
		Width	Height						
46.3 lb (21 kg)	JMC-DLP50(S)	42" - 50" (1067 mm) (1270 mm)	31.7" - 43.7" (805 mm) (1110 mm)	14" (356 mm)	42" - 56" (1067 mm) (1422 mm)	standard	12" - 18.5" (305 mm) (470 mm)	125 lb (57 kg)	125 lb (57 kg)
59.5 lb (27 kg)	JMC-DLP60(S)	52" - 60" (1321 mm) (1524 mm)	31.7" - 43.7" (805 mm) (1110 mm)	14" (356 mm)	52" - 65" (1321 mm) (1651 mm)	standard	12" - 18.5" (305 mm) (470 mm)	125 lb (57 kg)	125 lb (57 kg)
62.1 lb (28 kg)	JMW-DLP50(S)	42" - 50" (1067 mm) (1270 mm)	31.7" - 43.7" (805 mm) (1110 mm)	14" (356 mm)	42" - 56" (1067 mm) (1422 mm)	standard	12" - 18.5" (305 mm) (470 mm)	125 lb (57 kg)	125 lb (57 kg)
75.5 lb (34 kg)	JMW-DLP60(S)	52" - 60" (1321 mm) (1524 mm)	31.7" - 43.7" (805 mm) (1110 mm)	14" (356 mm)	52" - 65" (1321 mm) (1651 mm)	standard	12" - 18.5" (305 mm) (470 mm)	125 lb (57 kg)	125 lb (57 kg)

WARNING: WEIGHT OF TV or MONITOR NOT TO EXCEED MAXIMUM LOAD CAPACITY (PEERLESS RATED)!


MODELS	DLP50	DLP60
W	42" - 50" (1067 mm)(1270 mm)	52" - 60" (1321 mm)(1524 mm)
H	31.7" - 43.7" (805 mm)(1110 mm)	31.7" - 43.7" (805 mm)(1110 mm)
D	Add 3" to (H)	Add 3" to (H)

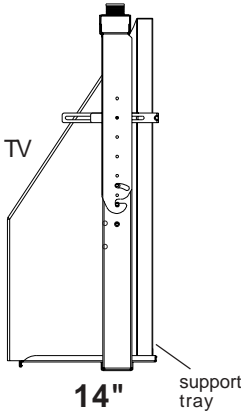



**SIDE VIEW-
WITH TV**

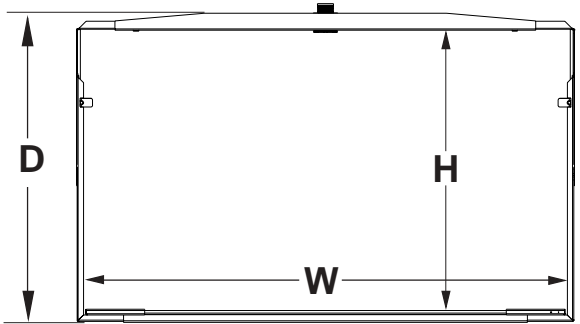

CEILING PLATE SPECIFICATIONS

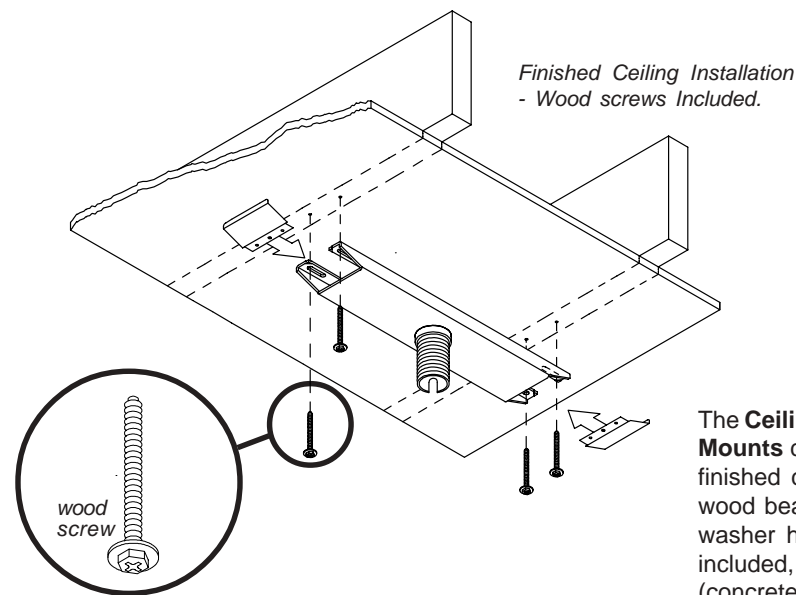


The **Ceiling Plate for DLP Mounts** can be attached to a finished ceiling (wood joists) or wood beam using the four washer head wood screws included, or a structural ceiling (concrete) using concrete anchor accessory kit **ACC 204** (sold separately).

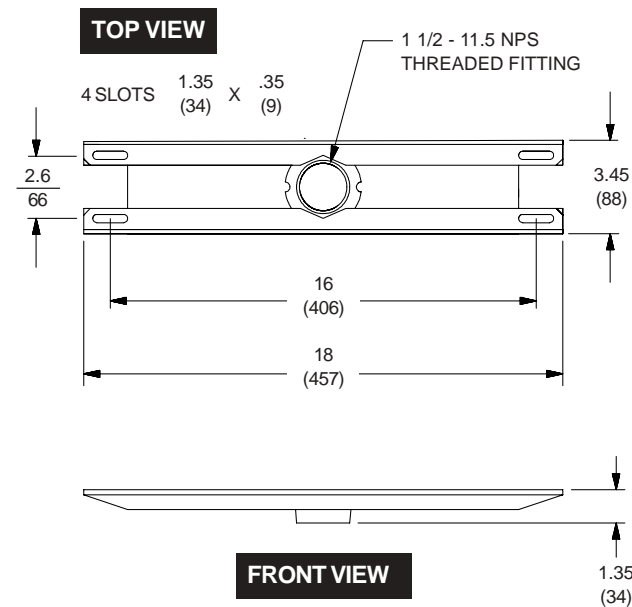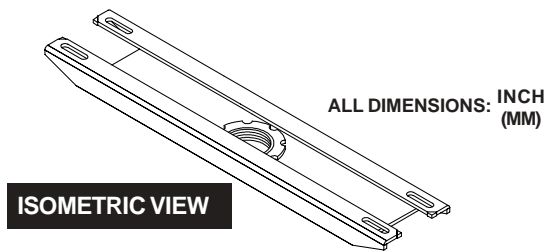

Architects specifications:

The Ceiling Plate shall be attached where indicated on the plans. It shall have a 1 1/2 - 11.5 NPS threaded fitting to accept a Peerless flush mount tube or extension column. It shall be constructed of 14 gauge cold rolled steel and finished in black or silver fused epoxy. Assembly and installation shall be done according to the instructions provided by the manufacturer.


WALL ARM SPECIFICATIONS

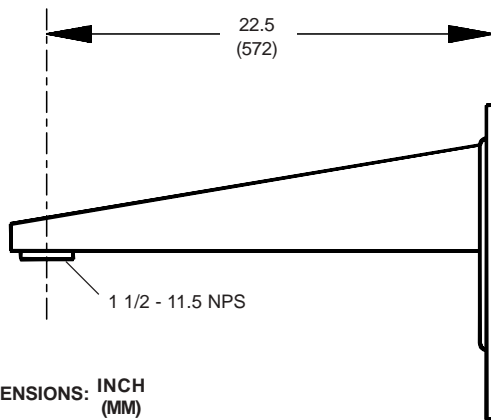

ALL DIMENSIONS: INCH
(MM)


CL = CENTER LINE TYP. = TYPICAL

SIDE VIEW

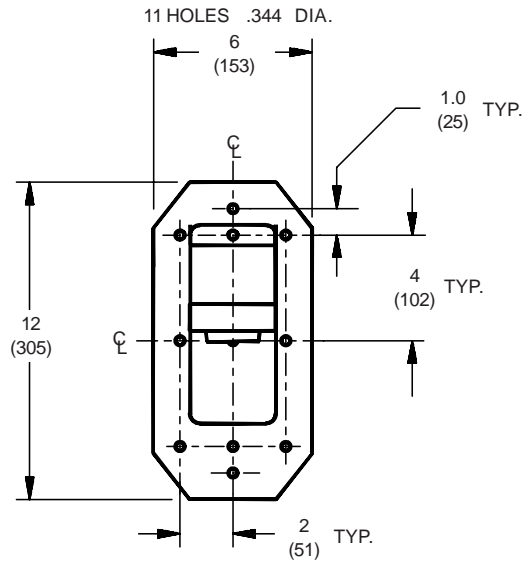


FRONT VIEW

Wall Arms include three wood screws (left) for attachment to a wood stud wall. For attachment to a concrete wall additional fastener package **ACC 204** must be ordered.

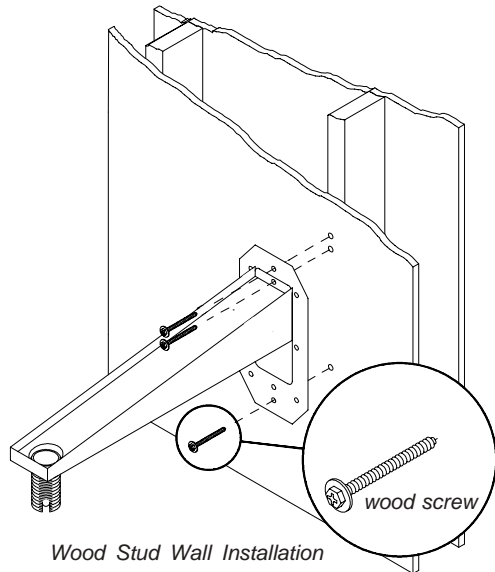

Jumbo Mount TV/Monitor Mount attaches to wall arm as shown. Flush mount tube, fiber washers, and retaining collar are included with DLP Mount.

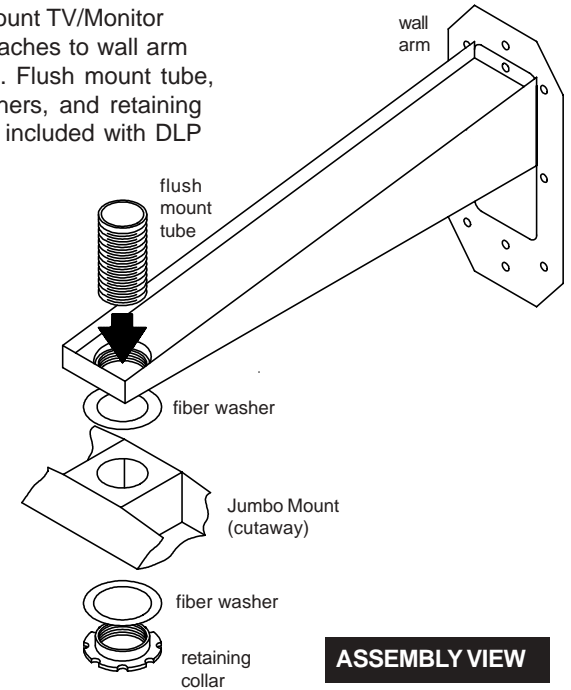

ASSEMBLY VIEW

Architects specifications:

The Wall Arm shall be attached where indicated on the plans. It shall have a 1 1/2 - 11.5 NPS threaded fitting to accept a Peerless flush mount tube. It shall be constructed of 12 and 14 gauge cold rolled steel and finished in black or silver fused epoxy. Assembly and installation shall be done according to the instructions provided by the manufacturer.