



Commanding Performance, Compelling Value

Sound that makes performances and audiences truly come alive doesn't come easy. But CF & CFX Series loudspeakers put the power of unique Renkus-Heinz developments like Complex Conic horns to work for you. Versatile enclosure designs, go-anywhere hardware and rugged construction help solve your sound reinforcement challenges easily and quickly. Advanced options like intelligent onboard amplification and RHAON — the Renkus-Heinz Audio Operations Network — help you build sophisticated sound systems that are easy to use.

Every CF & CFX Series loudspeaker is engineered by Renkus-Heinz to unrivaled standards of quality and innovation. Before we'll ship them, your loudspeakers have to meet our exacting requirements, for performance that will make you proud and durability that will keep you sounding great.

Applications

Virtually any application where size is a critical issue and outstanding sonic performance is required.

Permanent Installations

- Ideal for fills, delays, distributed and playback systems
- Churches, schools, sports venues, board rooms, malls, transportation venues, retail environments

Portable Applications

- Ideal solution for portable, compact, full-range sound reinforcement requirements.
- Performing artists, rental A/V, schools, churches, etc.



PF Series Intelligent Amplifiers

Passive, powered or networked: you can choose the CF/CFX system that suits your needs at any time. At the factory or in the field, the CFX passive connector plate can be easily replaced by a PF1-200 series Class D digital amplifier with loudspeaker specific processing. The PF1-200's lightweight switching power supply delivers 70% efficiency at full output,

reducing AC requirements and eliminating the need for a cooling fan.



Whenever you are ready for Ethernet audio networking, your CF/CFX loudspeakers are, too; just replace the connector plate or the PF1-200 with a PF1-200R RHAON empowered amplifier equipped for connection to the Renkus-Heinz Audio Operations Network. RHAON empowers you with CobraNet digital audio distribution, user configurable DSP for maximum control, remote systems management from any Windows computer, life safety functions and more – all using standard Ethernet hardware and cable.

Ready now for a self-powered CF61 System? Order the CF61-2. If you need digital audio distribution and full audio operations networking, order the RHAON empowered CF61-2R.

CF / CFX Series

CFX61

Non-Powered

CF61

Self-Powered

Compact 6 1/2" +1" HF, 2-Way Complex Conic Loudspeakers

PASSIVE : POWERED : NETWORKED



- **High Volume Output, Small Enclosures**
80 Hz to 20 kHz ± 3 dB: Outstanding, full-range performance in an extremely compact, space-saving design.
- **Flexible Input Configurations**
Choose passive inputs, or go self-powered with the PF1-200 series intelligent amplifier, either with or without RHAON net working.
- **RHAON Audio Operations Network**
Self-Powered CF61-2R cabinets are RHAON empowered for flexible digital signal distribution, loudspeaker management and control using standard Ethernet hardware and cabling.
- **Exclusive 150° by 60° Complex Conic Design**
Provides constant beamwidth/directivity without the problems of conventional rectangular horns; can be rotated 90° within the cabinet for wide or deep listening spaces.
- **1" Extended Range Titanium HF Driver**
Provides smooth, low distortion high frequency performance to 20 kHz and beyond.
- **Heavy-Duty 6.5" Woofer**
Easily handles 120 Watts of program power.

TECHNICAL INFORMATION

Sensitivity: CF61-2 & CF61-2R: 1.0 V for RPO
CFX61: 95 dB (1W/1m)

Maximum SPL: 111 dB program, 114 dB peak

Dispersion: 150° H by 60° V

Freq. Resp: ± 3 dB, 80 Hz to 20 kHz

HF Driver: 1" Titanium driver, model SSD140-8F;
15 W RMS, 30 W program

LF Driver: 6.5" woofer, model SSL6.5-9F; 1" VC;
60 W RMS @ 16 Ohms, 120 W program.

Enclosure: 13-ply hardwood, perforated metal grille

Power: CF61-2 & CF61-2R: See PF1-200 below
CFX61: 120 Watts program at 16 Ohms

Connectors: CF61-2 & CF61-2R: See PF1-200 Amplifier
CFX61: Screw terminals & looping 4-pin Neutrik
SpeakOn style connectors

Finish: Black or white paint

Hardware: 12-point univ. mtg. hdw. (#6 metric threads)
U-bracket attachment points

Dimensions: 16" H x 9 7/8" W x 11" D
(40.6 cm x 25 cm x 28 cm)

Weight: CF61-2 & CF61-2R: 23.2 Lbs (10.5 Kg) net
CFX61: 21.2 Lbs (9.6 Kg) net

PF1-200 AMPLIFIER

Power: 200 W RMS @ 4 Ohms

Freq. Resp: +0.0, -5 dB, 20 Hz to 20 kHz

THD Distortion: < 0.02% typical

Hum & Noise: <100 dB (A weighted)

Damping: >100

Input: 10K Ohm balanced differential

Sensitivity: 1.0 V for RP

CMR: 74 dB

Controls: Gain (screwdriver adjustable)

Connectors: Input: Looping XLR; female in, male out (pin 1
chassis, pin 2 +, pin 3 -)
Power: IEC Power connector

Power: Universal 90–260 VAC, 50/60Hz.
2.4 A @ 120 V, 1.2 A @ 240 V
Idle current: 200 mA @ 120 V;
100 mA @ 240 V
Max inrush current: 1 A

PF1-200R RHAON EMPOWERED AMPLIFIER

The PF1-200R is identical to the PF1-200 except for the addition of
the RHAON Network Interface; additional capabilities include:

Input: CobraNet; dual RJ45 connectors; accept
Cat 5 copper cable.
AES/EBU Phoenix connectors;
Analog Phoenix connectors


Digital Format: 16, 20 or 24 bit PCM; 48 or 96 kHz sample
rate; selectable Network Latency.

Protection: Soft & Peak Limiting, Excursion Control &
Thermal Regulation

For additional details on the RHAON Audio Operations Network, refer to
Renkus-Heinz brochure # RH 606.

Note: All analog inputs and outputs comply with AES Standard 45-2005 on interconnecting, grounding and shielding.

DIMENSIONAL INFORMATION

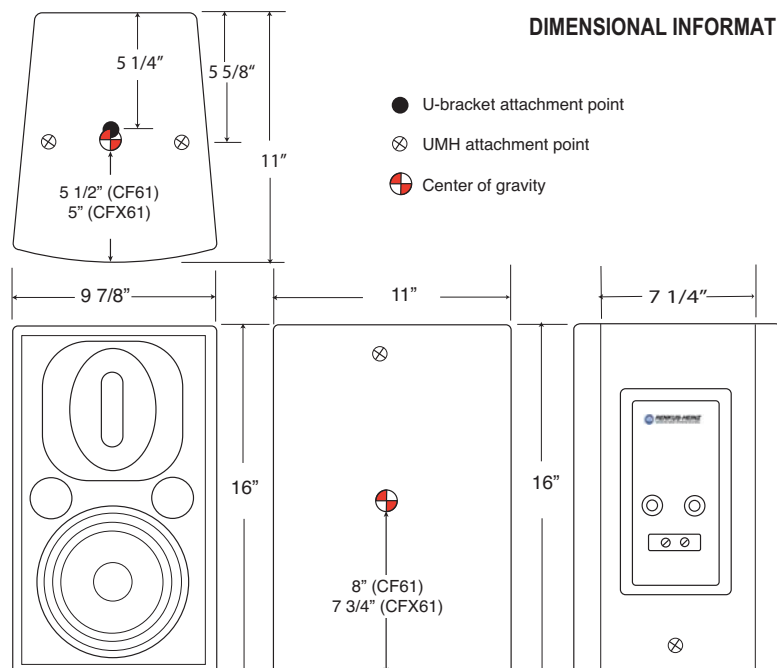

Note:

The UMH (Universal Mounting Hardware) attachment points have #6 metric threads and are positioned 1 3/4" from the edges unless otherwise indicated.

The rear view of a CFX61 is shown. The enclosure is shown without its metal grille.

For more detailed dimensional information, please refer to the 2D and 3D drawing files on our website www.renkus-heinz.com