


# Recording Surround with the SCHOEPS Double M/S System


## Recording on location

(only the microphone signals)

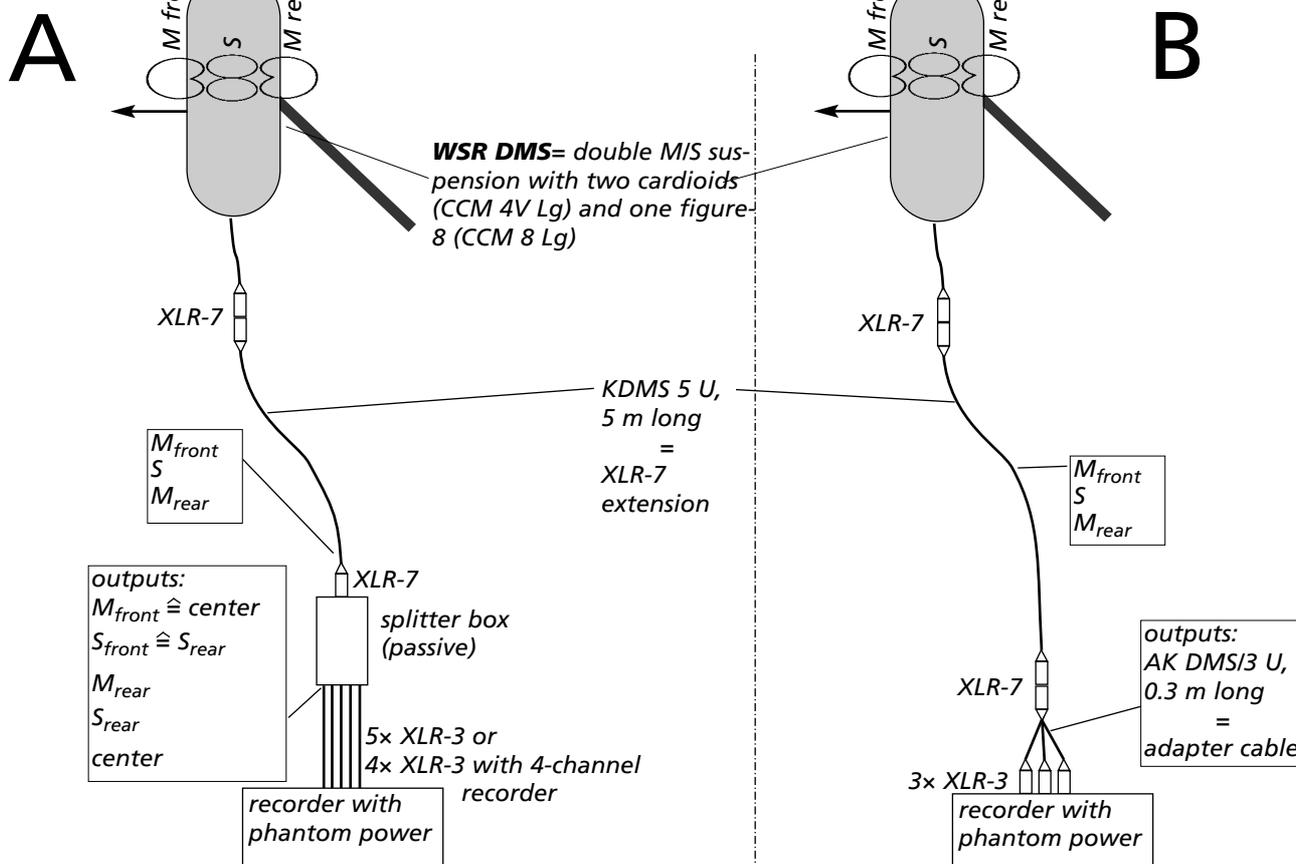


The splitter box is used to prevent any overlap in the phantom powering of the microphones. An overlap would not destroy the microphones, but it simply would not work.

## Post production dematrixing

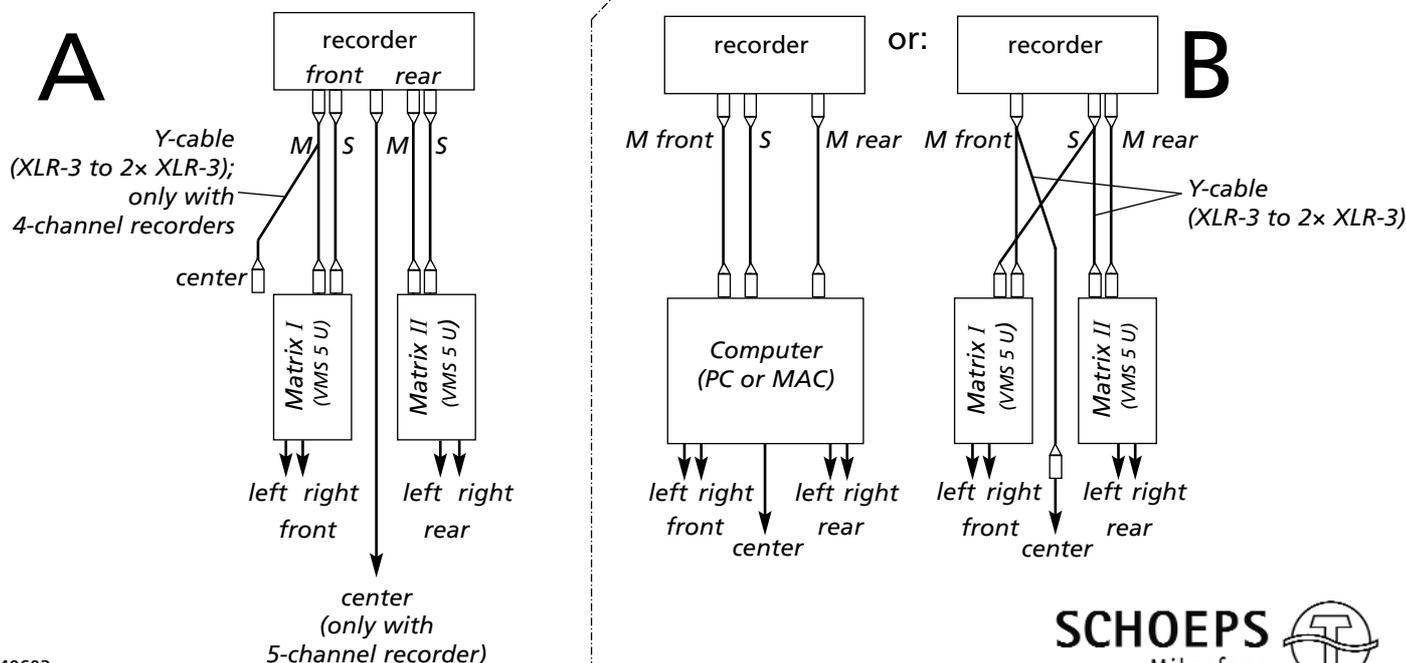

# Recording Surround with the SCHOEPS Double M/S System

## Recording the surround channels directly

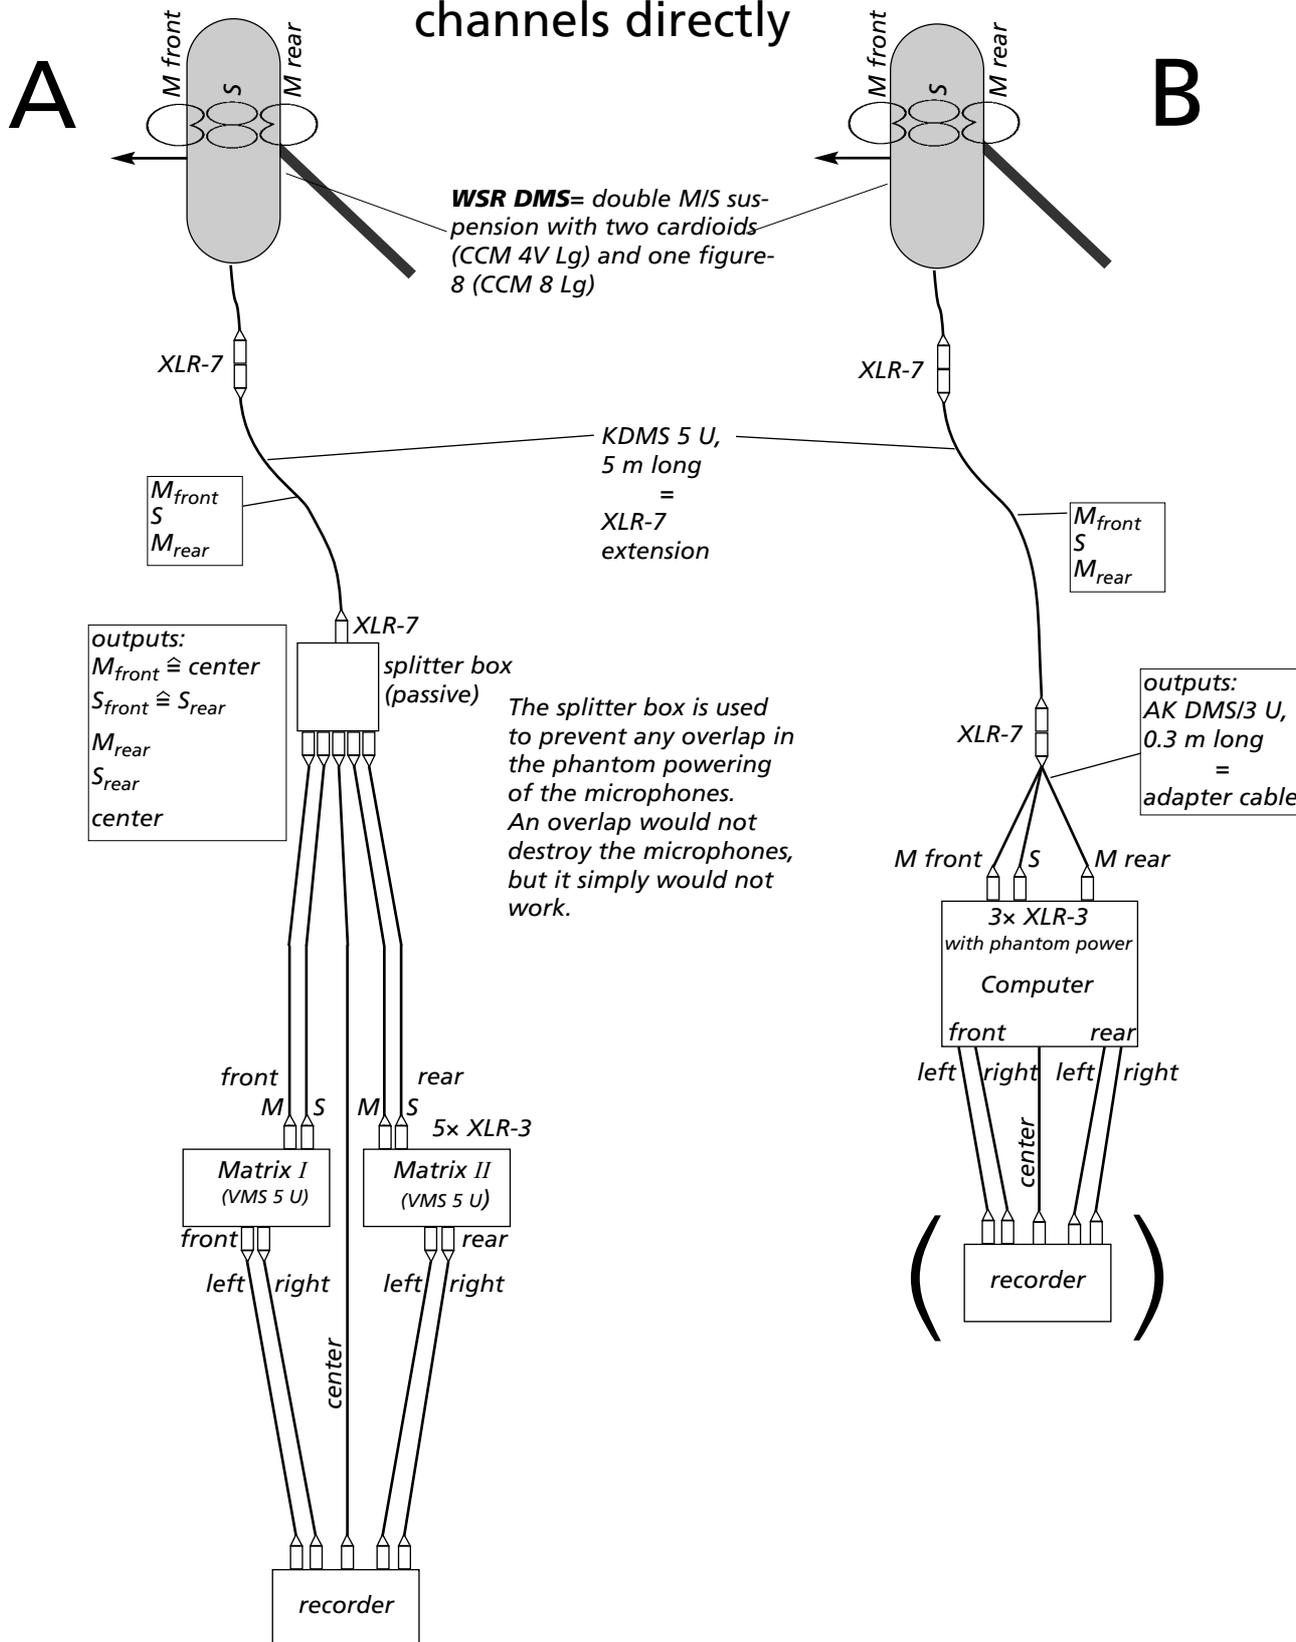

# Recording Surround with the SCHOEPS Double M/S System

## DMS Splitter

