

## FLEX ARRAY ENGINEERING INFORMATION

**Flex Array series is a high performance modular loudspeaker system designed for use in a variety of medium scale line array or virtual point source sound reinforcement activities ranging from theatres and live music venues to concert touring, festivals, corporate events and regional tours.**

The **TFA-600L** is a compact horn loaded bass enclosure designed to be flown or ground stacked with Flex Array TFA-600H mid/highs. It consists of a single 18" neodymium low frequency driver loaded with a TurboBass device in a birch plywood cabinet.

The TFA-600L utilises the same low frequency drive unit as the larger TSW-218, and employs the same loading techniques so these two bass enclosures can freely be mixed in any application. The proprietary 18" drive unit is the result of a development project that has produced a unique neodymium motor system. The magnet system drives a dual-spider split 4" voice coil which allows continuous BL (magnetic force) with displacement, ensuring optimum control

from the motor assembly and very low harmonic distortion even at the excursion limits. The 4" coil also results in a lower system moving mass than equivalent 5" units, resulting in higher sensitivity and exceptional response to fast transient peaks.

The enclosure is equipped with an integrated flying system which enables it to be flown at the top of a column of Flex Array loudspeakers using a simple conversion frame between the bass enclosures and mid/highs. The same conversion frame is used to provide a stable Flex Array groundstack. A pole mount socket is fitted for use with flying yokes.

The 15mm birch plywood cabinet is equipped with recessed handles on the sides and back, and is supplied with heavy duty wheels in order to aid trucking and handling.

A recessed panel at the rear of the cabinet carries two parallel-linked Speakon NL4MP connectors for input and loop-through connections.



### FEATURES


- High definition bass**
- 139dB max output**
- Compact enclosure**
- Neodymium drive unit**
- Pole mount socket**
- Integrated flygear**

### APPLICATIONS


- House of Worship**
- Flown clusters**
- Ground-stacked touring**
- Theatre and corporate**
- Live music venues**
- Dance clubs**

<b>DIMENSIONS (HxWxD)</b>	574mm x 710mm x 848mm (22.6" x 28" x 33.4")								
<b>NET WEIGHT</b>	72kg (158.4lbs)								
<b>COMPONENTS</b>	1 x custom 18" (457mm) LF driver								
<b>FREQUENCY RESPONSE</b>	38Hz - 150Hz $\pm$ 3dB, 30Hz - 150Hz $\pm$ 10dB Recommended operational range below 250Hz								
<b>POWER HANDLING</b>	800 watts r.m.s., 1600 watts program								
<b>SENSITIVITY(1W@1M)</b>	104dB; 110dB with 16 units								
<b>CALC. MAXIMUM SPL</b>	Single enclosure: 133dB continuous (calculated SPL addition), 139dB peak								
<b>NOMINAL IMPEDANCE</b>	8 ohms								
<b>CONSTRUCTION</b>	15mm (5/8") birch plywood throughout; heavily braced, rebated, screwed and glued. Finished in black semi-matt textured paint. Eight recessed carrying handles.								
<b>GRILLE</b>	2mm powder coated perforated mild steel backed with reticulated foam								
<b>CONNECTORS</b>	(2) Neutrik Speakon NL4MP, wired pin1+: positive, pin1-: negative; pin2+ and pin2-: n/c								
<b>SPARES AND ACCESSORIES</b>	<table border="0"> <tr> <td>LS-1815</td> <td>18" (457mm) LF loudspeaker</td> </tr> <tr> <td>RC-1815</td> <td>Recone kit</td> </tr> <tr> <td>MG-600L</td> <td>Replacement metal grille</td> </tr> <tr> <td>T4 wheels</td> <td>Heavy duty wheels</td> </tr> </table>	LS-1815	18" (457mm) LF loudspeaker	RC-1815	Recone kit	MG-600L	Replacement metal grille	T4 wheels	Heavy duty wheels
LS-1815	18" (457mm) LF loudspeaker								
RC-1815	Recone kit								
MG-600L	Replacement metal grille								
T4 wheels	Heavy duty wheels								

**FREQUENCY RESPONSE**

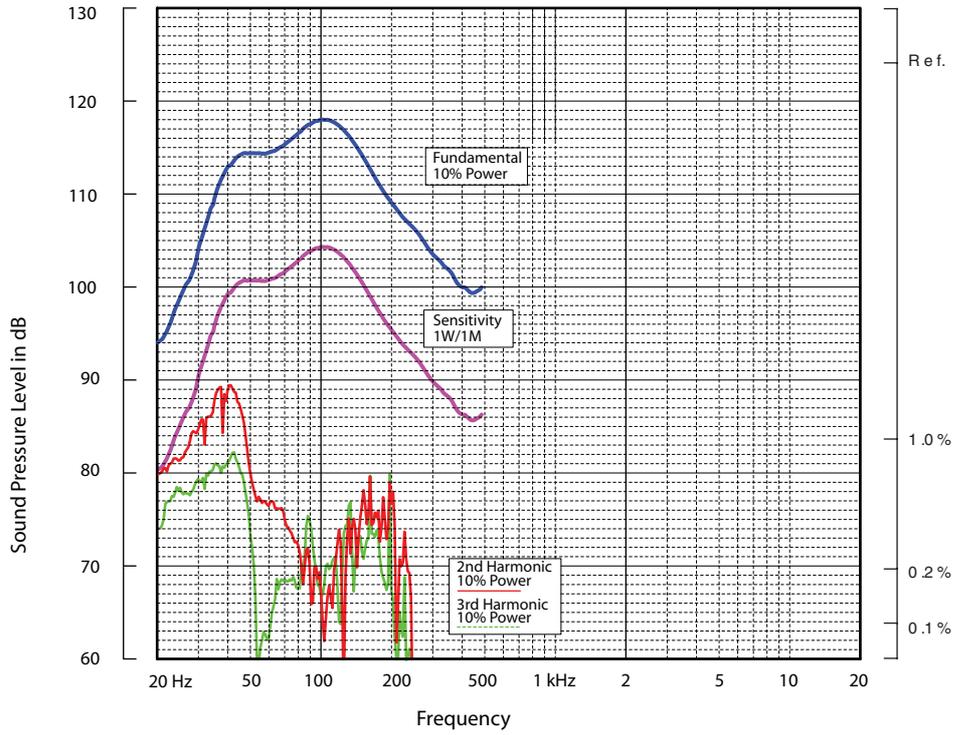

**IMPEDANCE**

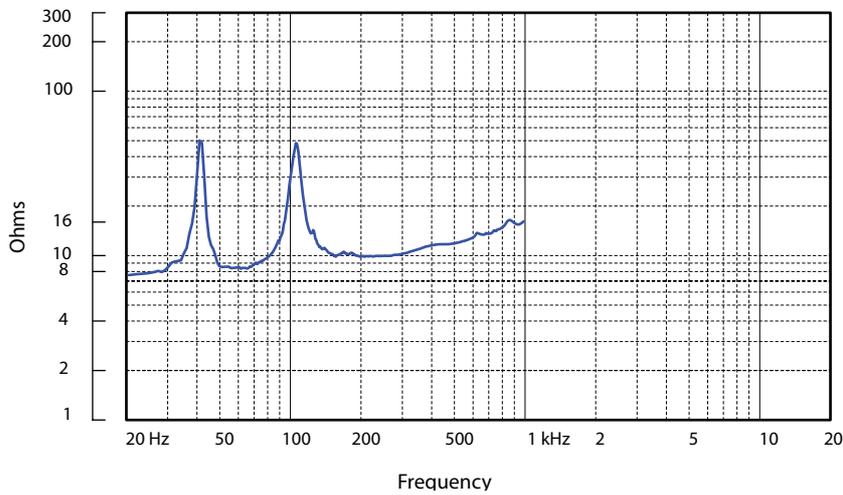

**ARCHITECTURAL  
& ENGINEER'S  
SPECIFICATIONS**

The system shall be of the horn-loaded subwoofer type consisting of one 18" (457mm) low frequency driver. Performance specifications of a typical production unit shall meet or exceed the following:- Frequency response, measured with a swept sine wave input shall be flat within  $\pm 3\text{dB}$  from 38Hz to 150Hz, and within  $\pm 10\text{dB}$  from 30Hz to 150Hz. Nominal impedance shall be 8 ohms. Power handling shall be 800 watts r.m.s., 1600 watts program. Sensitivity measured with 1 watt input at 1 metre distance on axis, mean averaged over stated bandwidth shall be 104dB. Maximum SPL (peak), measured with music program shall be 139dB. Dimensions: 574mm x 710mm x 848mm (22.6" x 28" x 33.4"). Weight: 72kg (158.4lbs). The loudspeaker system shall be the Turbosound TFA-600L. No other system shall be acceptable unless the above combined performance specifications are equalled or exceeded. Flying and installation hardware shall be available comprising a range of load-certified components.

**DIMENSIONS**

