



innovoxaudio.com

Slim Line Series –

SL-4.1US

formerly SF-404

DESCRIPTION

The **SL-4.1US** is an ultra-slim 2-way loudspeaker designed to be surface-mounted flat on a wall and disappear into the architectural surroundings. Its precision ribbon HF driver and four 4" long-excursion LF drivers renders complex audio program with detail and clarity that does not seem possible from such a small package.

The addition of an available SBC-210 ceiling mounted sub-woofer extends low frequency response to 34 Hz and increases maximum system SPL.

KEY FEATURES:



- ultra-slim profile (only 1.6" deep)
- 120° H x 90° V coverage
- employs precision ribbon HF driver
- blends into architectural environment
- hidden mounting bracket

APPLICATIONS:

- sound for video presentation
- premium home theater LCR
- premium home theater surrounds
- delay fill
- theatrical effects

NOMINAL DATA

Frequency Response	120 – 20,000 Hz ± 3 dB
Sensitivity	92 dB @ 2.83 volts / 1M
Impedance	6Ω
Power Handling	100 W peak
Maximum Output	114 dB peak, @ 1 meter on axis, averaged from 300-3,000 Hz
Nominal Coverage Angles	120° H x 90° V
Dimensions	height: 30.75 " width: 6.75 " depth: 1.75 "
Shipping Weight	15 lbs.

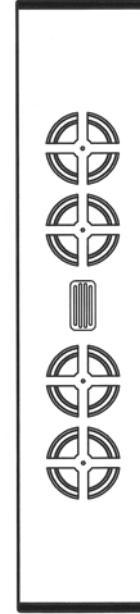

(cross-section)

DESCRIPTIVE DATA

System Configuration	Low profile 2-way full-range
Components & Loading	(4) 4 " woofers; (1) ribbon tweeter
High-Pass Filter	Built-in 1 st order @ 120 Hz
Enclosure Type	Sealed enclosure, ultra-slim profile
Enclosure Material	Steel chassis, with composite endcaps
Finish	Black or White standard; (custom colors available)
Connectors	Dual binding head screws
Suspension Hardware	Hidden bracket included
Grille	Integral, fabric wrapped; optional perforated metal grille

West Coast Office

1155-C Arnold Drive, #231
Martinez CA 94553
ph: **925 372-8156**
email: orders@innovoxaudio.com

Central Office

296 North Pascal Street
Saint Paul MN 55104
ph: **612 379-0100**
email: sales@innovoxaudio.com

innovoxaudio.com