

FURMAN



F1000-UPS

UNINTERRUPTIBLE POWER SUPPLY, BATTERY BACKUP, AND POWER CONDITIONER

FEATURES

- 1000VA Battery Backup maintains critical data and allows orderly shutdown in the event of a power outage
- Series Multi-Stage Protection (SMP) provides virtually maintenance-free AC surge suppression
- Linear Filtering Technology (LiFT) for unequalled audio/video clarity
- Extreme Voltage Shutdown (EVS) protects your equipment from sustained overvoltage conditions
- Dual Learning IR Blasters allow safe shutdown of remote components
- RS-232 Interface provides custom open source programming and control
- Easy to use CD ROM software included
- USB Interface
- Critical Load Management
- AVR voltage regulation provides a consistent 120V ($\pm 5\%$ -10%) output
- Optional rack ears included

DESCRIPTION

Furman proudly introduces the F1000-UPS: battery backup designed exclusively for audio/video professionals and home theater aficionados.

For decades, traditional audio/video components were simple analog devices designed to easily weather power outages of well over two seconds. Later, as computer and microprocessor based components gained in popularity, their extraordinary sensitivity to even a fraction of a second's power loss was managed with traditional UPS (uninterruptible power supply) technology.

Unfortunately, these units were solely designed for the I.T. professional. Though they included many technologies and features appropriate to that application, they fell short for premium audio/video components. Though many of these manufacturers later recognized the ever-emerging professional audio/video, broadcast, and home theater market, their lack of experience led merely to a re-tooled chassis. These hastily produced UPS devices lacked the technologies necessary to truly optimize protection, performance, and control for today's audio video components.

The Furman F1000-UPS more than fills this void, and offers your system unparalleled battery back-up technology, created from the ground up to meet the exacting demands of the world's most sensitive audio, video and control systems!

Protection

Typical UPS systems feature antiquated surge suppression technologies that can cause as much damage and annoying lock-ups as they attempt to prevent. Only Furman offers battery back-up with our road-proven SMP non-sacrificial, zero ground contamination surge suppression technology and EVS Extreme

Voltage Shutdown. After all, the most robust battery can not function if the accompanying circuits are damaged. With Furman's F1000-UPS, you can expect years of trouble free operation*.

Filtration

Though many control devices are relatively immune to moderate levels of AC line noise, today's more sensitive devices (such as DLP projectors) certainly are not. High-definition technologies have pushed resolution to levels so extreme that virtually any AC noise capable of coupling with your system's signal will distort, mask, or destroy the performance advantages we all strive so hard to capture and reproduce. Once again, the F1000-UPS is different. While other UPS devices feature AC line filters suitable for a I.T. closet, only Furman employs our exclusive Linear Filtering Technology (LiFT). This advanced noise filtering technology assures that today's ultra-wide dynamic range is maintained as it must be – pristine. Remember, less AC noise equals greater content, greater resolution, and higher definition.

Programmability & Control

Audio/video systems can vary greatly in their size and components, and as such, flexibility is needed in determining how a battery backup solution should function under different circumstances. Because of this, Furman has provided open source RS-232 control over two independent AC outlet banks, with a wide range of control features to interface with an existing automation solution. Dual programmable IR control allows the unit to send a shut down command to remote components – no more expensive projector bulbs to replace in the event of a blackout.

F1000-UPS (continued from reverse)

Typical Backup Components


Because of the nature of battery backup technology, high-current audio and video components such as power amplifiers, powered subwoofers, and high-wattage displays are not recommended for use with the F1000-UPS. Not only will these components drain battery power quite rapidly, line impedance will be raised due to the F1000-UPS's (or any) AVR and AC to DC inverter, which can induce current compression and noticeably diminish performance with high-current A/V equipment.

The following components are **ideal** for use with the F1000-UPS:

**Satellite Receivers • Cable Boxes • Digital Video Recorders
Media Servers • High Resolution Game Gaming Consoles
Lamp Based Video Displays • Control Systems**

For power management of other components, Furman recommends Elite i or Reference i Series Power Conditioners. For high-current components such as power amplifiers and powered subwoofers, solutions featuring Furman's exclusive Power Factor Technology are ideal.

FRONT AND REAR PANEL FEATURES

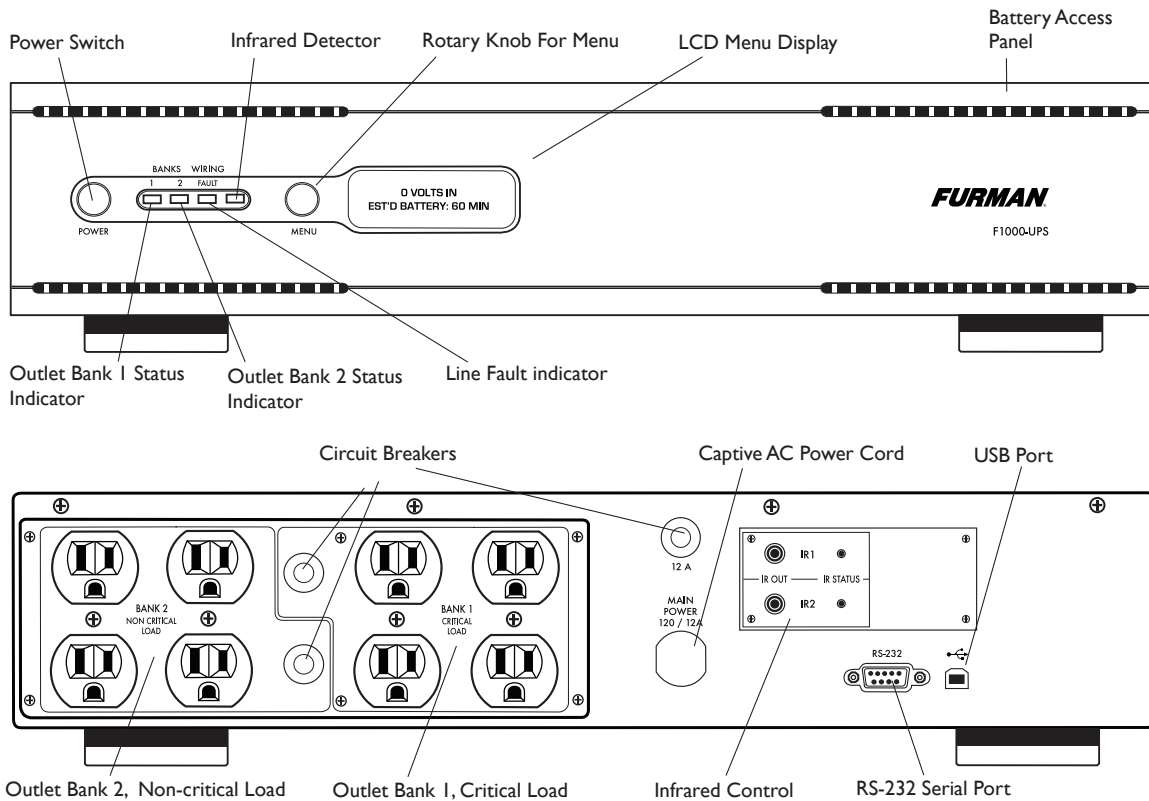

APPROXIMATE RUN TIME, 1000VA**

Satellite Receiver or Cable Box = 45 Minutes
 Satellite Receiver + Game Console = 14 Minutes
 Media Server + Control System = 9 Minutes
 Satellite Receiver + Game Console + Projector = 7 Minutes

These run times should be used as a **guideline only and are dependant on **device and usage**.

F1000-UPS SPECIFICATIONS

Input

Voltage: 85 - 137 VAC
Frequency: 57 - 63 Hz

AC Power

Surge Protection: Non-sacrificial SMP (Series Multi-Stage Protection)
Current Rating: 12 A
Overvoltage Shutoff, fast rise: 150 ± 5V
Overvoltage Shutoff, slow rise: 132 ± 5V
Noise Attenuation: 10 dB @ 10kHz, 40 dB @ 100 kHz, 50 dB @ 500kHz
Linear Attenuation Curve: From 0.05 - 100 Ohms line impedance
Automatic Voltage Regulation, Sensitive Mode Capture Range: 99 - 135 V
Automatic Voltage Regulation, Sensitive Mode Output Range: 120 ± 5%
Automatic Voltage Regulation, Standard Mode Capture Range: 94 - 142 V
Automatic Voltage Regulation, Standard Mode Output Range: 120 ± 10%

Ups Output

Voltage: 120 ± 5 V Simulated Sine Wave
Frequency: 60 Hz ± 1%
UPS Output Capacity: 1000VA, 600W @ 0.6pf
UPS Backup Time: 3 minutes at full load
Transfer Time: < 4ms

Dimensions

Product: 4" H x 17" L x 13" W
Weight: 36 lbs.

Engineered in the USA by Furman • 1690 Corporate Circle • Petaluma, CA. 94954 USA
 Phone: (707) 763-1010 • Fax: (707) 763-1310 • www.FurmanSound.com