

Powered

Wall Mount *Stereo Speakers*



Two Wall Mount Speakers!

Amplifier in One speaker
Powers Both

■ Features: 30 Watts rms - Audience Size 500, Room size 1,000 sq.ft. ■ 5" Full Range Speaker (8 Ohms) 1" Dome Tweeter ■ One Stereo RCA Input & Stereo Speaker Terminals - INCLUDES 10 Ft. Cable to connect auxiliary speaker ■ Treble and Bass Controls ■ AC Power cord ■ Specially tooled and molded plastic enclosure for exceptional durability ■ Weight 10 lbs. ■


Rated power output	30W Dynamic (Speaker Power Rating: 35W)
Sound Pressure Level:	Max 112 dB Output
Power Supply	Standard IEC Power Cable
Frequency Response	Speaker: 60Hz-18KHz Amplifier: 20Hz-20kHz
Gain	30dB(max)
Sound Pressure Level	89dB(max SPL)
Sensitivity	89dB
Enclosure	Waterproof with plastic steel (P.P. Fiber)
Weight:	10 lbs. 4.6 kgs
Dimensions (HWD):	9.75in.H x 7in.W x 6in.D
Equalization	2 Bands EQ ± 15 dB
Warranty	1 Year Limited Warranty

Powered Classroom & Meeting Room Speakers

Wall Mounts Built Into Unit

- Simple Twist On Detachable Brackets
Swivel to point any direction -

Simple Connection to your
Computer, Projector, Multimedia Device
or Electronic Whiteboard!

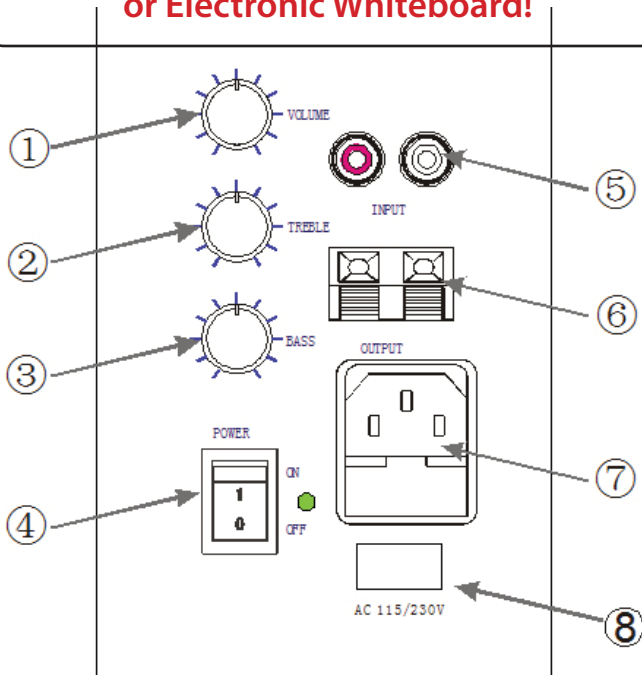

1. VOLUME CONTROL

2. TREBLE CONTROL

Adding high frequency can improve the intelligibility. Adjust it to the desired level.

3. BASS CONTROL

By adding bass you can add warmth to your music. Decreasing bass can improve the intelligibility of spoken messages.

4. ON/OFF

5. INPUT

Here you can connect any sound source. (LINE LEVEL No Mics)

6. SPEAKER OUTPUT

Using other loudspeakers can give bad result and even cause damage to the main unit. Connect black to black and red to red terminals.

7. AC Power Cord with AC (Standard IEC Type) Socket

The unit can be connected to any wall outlet with a standard AC (IEC type like computers often use) power cord. This socket contains a 1A slow blow fuse.

8. CHANGEABLE SWITCH