





## VP-436

### 7-Input Analog & HDMI ProScale™ Presentation Digital Scaler/Switcher

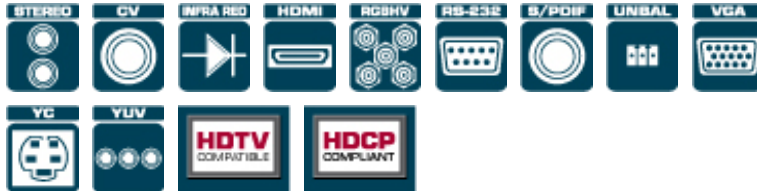

The **VP-436** is a 7-input scaler/switcher for composite video, s-Video (Y/C), component video, computer graphics video and HDMI with unbalanced stereo and S/PDIF audio signals. It scales the selected video signal to a computer graphics or HDTV output resolution, embeds the audio and outputs an HDMI signal.

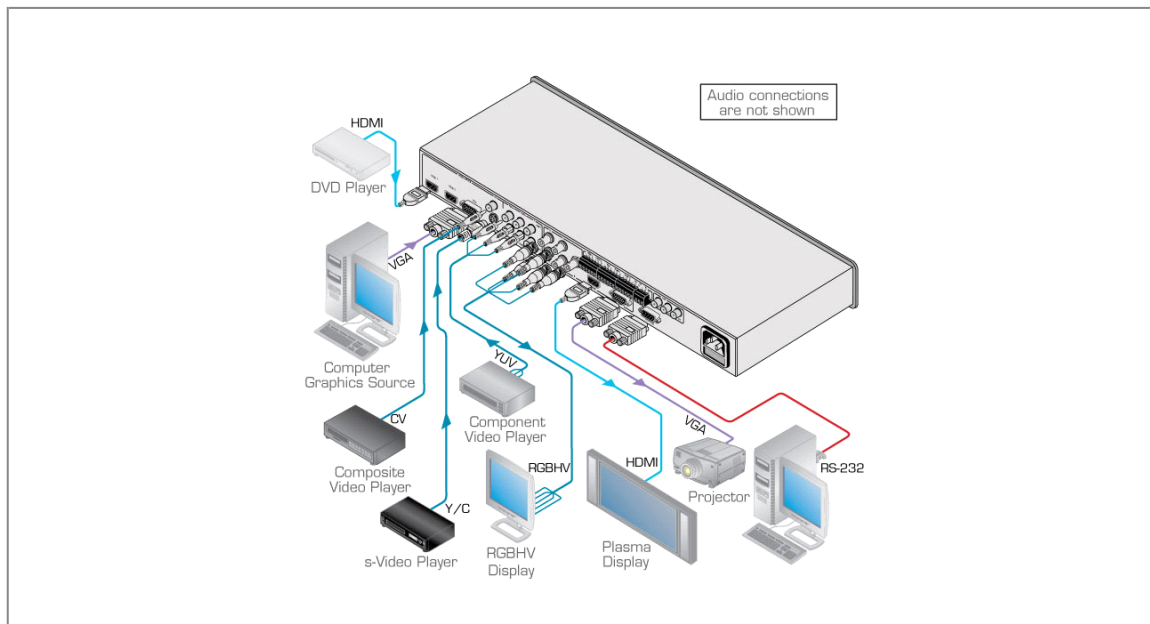



## VP-436

### FEATURES

- **K-Storm™ Scaling Technology** - Kramer's extremely high-performance scaling technology. High-quality 3:2 and 2:2 pull down de-interlacing and full up and down scaling of computer graphics video input signals.
- **HDTV Compatible.**
- **HDCP Compliant** - The HDCP (High Definition Content Protection) license agreement allows copy-protected data on the HDMI input to pass only to the HDMI output.
- **Video Inputs** - 1 composite video, 1 s-Video, 2 component video, 1 computer graphics (15-pin HD) & 2 HDMI.
- **Scaled Outputs** - A single output signal simultaneously available in 3 formats: 1 HDMI and 2 RGBHV (5 BNC, & 15-pin HD).
- **18 Output Resolutions** - Up to WUXGA & 1080p.
- **Audio Inputs** - 7 unbalanced on terminal blocks, individual level control.
- **Audio Output** - Transcodes to both stereo and S/PDIF audio simultaneously (RCAs) and embeds audio onto the HDMI output, master volume control.
- **Multi-Standard** - PAL & NTSC.
- **Audio Delay** - 40ms, 110ms, 150ms, or disable.
- **Companion AFV (Audio-Follow-Video)** - Stereo audio for every input.
- **Built-in ProcAmp** - Color, hue, sharpness, noise, contrast, and brightness.
- **Front Panel Control** - Audio mute, video blanking & freeze frame.
- **Front Panel Lockout.**
- **Multiple Aspect Ratio Selections** - Full, overscan, underscan, letter box & panscan.
- **Flexible Control Options** - Front panel buttons, IR remote with OSD (on-screen display) & RS-232.
- **Worldwide Power Supply** - 100-240V AC.
- **Standard 19" Rack Mount Size** - 1U. Rack "ears" included.

### TECHNICAL SPECIFICATIONS

<b>INPUTS:</b>	2 HDMI connectors (HDMI, HDCP version 1.1), 1 VGA on a 15-pin HD connector, 1 composite video on an RCA connector, 1 YC on a 4-pin connector, 2 component video each on 3 RCA connectors, 2 HDMI, 1 VGA, 2 COMP, 1 CV, 1 YC unbalanced stereo audio on 7 3-pin terminal block connectors.
<b>OUTPUTS:</b>	1 RGBHV on 5 BNC connectors, 1 HDMI connector (HDMI, HDCP version 1.1), 1 VGA on a 15-pin HD connector, 1 S/PDIF on an RCA connector, 1 analog stereo audio on RCA connectors.
<b>H FREQUENCY:</b>	15.63-90kHz.
<b>V FREQUENCY:</b>	50-100kHz.
<b>RGB SYNCS:</b>	H and V TTL separated syncs.
<b>RGB LEVEL:</b>	1.2Vpp max, 75Ω load.
<b>XGA OUT LEVEL:</b>	1.2Vpp max, 75Ω load.
<b>S/PDIF OUT LEVEL:</b>	0.55Vpp constant.
<b>OUTPUT RESOLUTIONS:</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, VGA, SVGA, XGA, SXGA, UXGA, WXGA, WSXGA, WUXGA, 1280x800, 1440x900, 1400x1050, Native.
<b>OUTPUT REFRESH RATE:</b>	60Hz for computer graphics resolutions, 50/60Hz for HDTV resolutions.
<b>CONTROLS:</b>	CV, YC, component 1, component 2, VGA, HDMI 1, HDMI 2, input selector buttons; blank, mute, freeze buttons; menu, enter, menu arrows, reset to XGA/720p, lock buttons, RS-232, IR.
<b>POWER SOURCE:</b>	100-240V AC, 33VA max.
<b>DIMENSIONS:</b>	19" x 7" x 1U W, H, D, rack mountable.
<b>WEIGHT:</b>	2.7kg (6lbs) approx.