

**NEW**

# SATURN 360 SPEAKER

Model: SAT360

Complete 360° Sound Coverage

Weatherized

- Outdoor/Indoor Speaker
- Dynamic 360° Sound – 180° Dispersion
- SELECTABLE SWITCH–  
70 V or 8  $\Omega$  Combination
- Maximum 65 W Power at 8  $\Omega$
- 70 V Transformer Taps –  
3, 6, 12, 25 and 50 W
- Ideal for Retail Stores, Gyms,  
Restaurants, Hotels, Bars and Malls
- Quick and Easy Installation
- Fixed or Free Hanging
- Available in Black or White



## HIGH CEILING AUDIO SOLUTIONS



*Envirōtainment™*

**OWI®**  
OWI Incorporated  
Established 1978  
[www.owi-inc.com](http://www.owi-inc.com)

**NEW**


# SATURN 360 SPEAKER

**Model: SAT360**

- Outdoor/Indoor Speaker
- Dynamic 360° Sound – 180° Dispersion
- SELECTABLE SWITCH – 70 V or 8 Ω Combination
- Maximum 65 W Power at 8 Ω
- 70 V Transformer Taps – 3, 6, 12, 25 and 50 W
- Ideal for Retail Stores, Gyms, Restaurants, Hotels, Bars & Malls
- Quick and Easy Installation
- Fixed or Free Hanging
- Available in Black or White

GENERAL SPECS	SAT360
Description:	5-Way, 70 V & 8 Ω Combination 1 ea. 5" Polypropylene Woofer 4 ea. 0.5" PEI Tweeter with Overload Protection
Outdoor/Indoor:	Yes
Impedance:	70 V and 8 Ω Combination
Sensitivity (1W / 1M):	89 dB
Max Power @ 8 Ω:	65 W
70 V Tap Settings:	3, 6, 12, 25 and 50 W
Nominal Power:	50 W
Frequency Response:	115 Hz - 12 kHz
Crossover:	6 dB @ 5 kHz
Dispersion:	360° H x 180° V
Woofer Size:	5" – 1 Each
Woofer Material:	Polypropylene
Tweeter Size:	0.5" – 4 Each
Tweeter Material:	PEI
Tweeter Overload Protection:	Yes
Enclosure:	Polyethylene
Grill Material:	Powder Coated Mesh Wire
Dimensions:	9" Diameter x 8" Height
Net Weight (Unit Only):	5.46 Lbs.
Total Weight:	8.03 Lbs.
Color(s):	Black, White
Mounting Hardware:	1.2" Dia. x 11.5" PVC (Included)
Mounting Hardware Option:	Safety Cable (Not Included)
Paintable:	No
Warranty:	5 Years



## FREQUENCY RESPONSE CHART

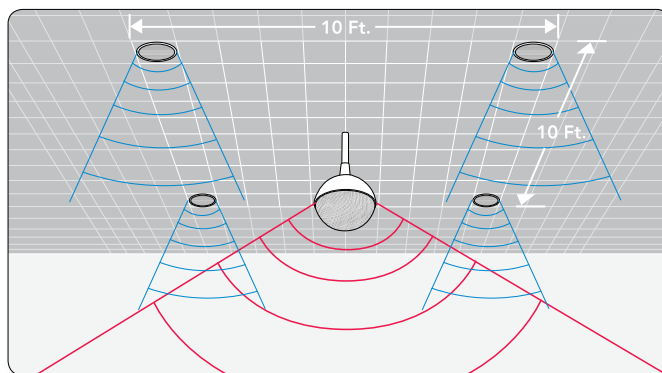

**1 SATURN vs 4 IN-CEILING SPEAKERS**



## POLAR CHARTS

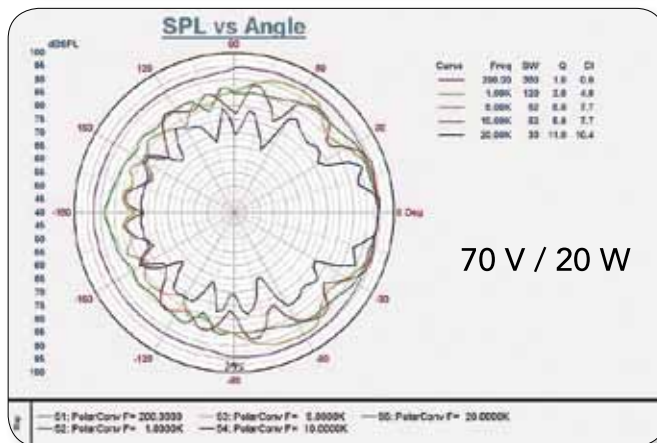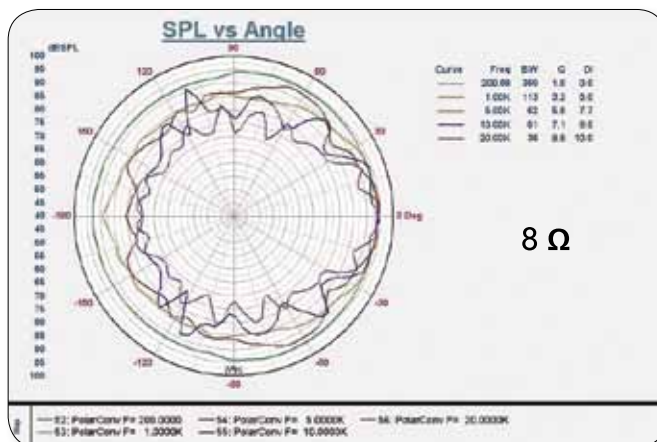

**OWI, Inc.**  
 17141 Kingsview Ave.  
 Carson, CA 90746 USA  
 ph. 310.515.1900  
 toll free 800.638.1694  
 fax 310.515.1606  
 email info@owi-inc.com  
 web www.owi-inc.com