



The A-CA74E takes handheld camera system configurations to a new level of style, sophistication, and ease-of-use with its ultra-sleek design and rich feature set. The shoulder adaptor features both a chest pad and a cushioned shoulder pad for extra stabilization and comfort. Whether mobile or in stand-alone tabletop configuration, the A-CA74E offers 12V ENDURA battery compatibility for longer running times and better efficiency. Rugged construction makes the A-CA74E a first-class support device. Key positioning of the model's knobs and levers permit multiple angles—maximizing an operator's shooting options.



A-CA74E Product Features:

- Operates on a tripod, on tabletop, or in a shoulder mount configuration depending on your shooting environment.
- Flexible ergonomics allows operators to quickly and securely set up; after use, the unit collapses and folds for compact carrying & small-space storage.
- Wide variety of major manufacturer handheld camcorders and still cameras, such as HD/SLR models, can be mounted.
- Includes the A-HG74 Shoulder Mount Supporter with chest pad extension and hand grips that can be easily detached. Alternative third party rail systems can be mounted onto the A-CA74E base unit for optional matte box, follow focus, lens support and more.
- In addition to 12V ENDURA batteries, the A-CA74E maximizes production values when paired with the CW-5HD wireless transmission system.
- Versatile selection of V-Plates includes P-V212 for 12V DC output, P-V257 for 5V/7.3V switchable regulation, or P-V284 for 8.4V regulation.



A-HG74
Standard
Accessory

- Choice of optional DC-powered camera input cables combine with matching P-V2 series and A-CA74E providing appropriate voltage for these pro cameras -

P-V257 combined with cables:


- C-EOSC - use with Canon EOS Series 7D/5D Mark II
- C-JVCC - use with JVC GY-HM Series
- C-PANAVC - use with Panasonic HMC Series
- C-PANCP2 - use with Panasonic HPX, HVX Series
- C-CANC - use with Canon XL, XH Series

P-V212 combined with cable:

- C-PIN - use with Sony PMW-EX1/EX3 Series

P-V284 combined with cable:

- C-SONC - use with Sony HVR Series

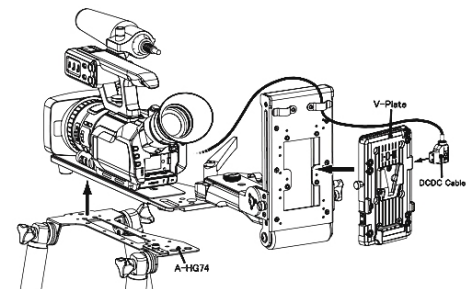

Technical Specification

Dimensions:

13.9 (W) x 4.1 (H) x 5.4 (D) inches
(folded position)

Weight:

3.3 lbs

IDX reserves the right to change specifications contained herein without notice.






Combine **A-CA74E Shoulder Mount**

& Your Choice of **V-Plate and Cable**

Below for Custom **IDX 12V Solutions**

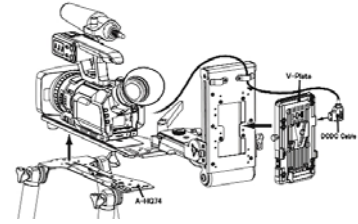

| | Shoulder Mount System Configuration | | | Camera Power Consumption (Wh) | Estimated ENDURA Battery Run Time | | | |
|---|-------------------------------------|----------------------|---------------------|-------------------------------|-----------------------------------|-------------------|---------------------|-----------------|
| | Shoulder Adaptor | P-V Plate (Optional) | DC Cable (Optional) | | ELITE 136Wh | E-10 / E-10S 93Wh | E-HL9 / E-HL9S 88Wh | E-7 / E-7S 68Wh |
| SONY | | | | | | | | |
| PMW-EX1 | A-CA74E | P-V212 | C-PIN | 13 | 10.5 | 7.1 | 6.7 | 5.2 |
| PMW-EX3 | | | | 13.5 | 10 | 6.8 | 6.5 | 5 |
| HXR-NX5 | A-CA74E | P-V284 | C-SONC | 7.7 | 17.6 | 12 | 11.5 | 8.8 |
| HXR-MC50U | | | | 15 | 9 | 6.2 | 5.9 | 4.5 |
| HVR-Z5U/Z7U | | | | 7 | 19.4 | 13.3 | 12.5 | 9.7 |
| HVR-V1U | | | | 6.8 | 20 | 13.6 | 12.9 | 10 |
| HVR-HD1000U | | | | 4.8 | 28.3 | 19.3 | 18.3 | 14 |
| HVR-Z1U/FX1 | | | | 8 | 17 | 11.6 | 11 | 8.5 |
| HVR-270/270U | | | | 12 | 11.3 | 7.7 | 7.3 | 5.6 |
| DSR-PD170/150 | | | | 4.7 | 28.3 | 19.3 | 18.3 | 14 |
| PANASONIC | | | | | | | | |
| **Panasonic Camcorder AG-AF100: Please call IDX Sales Department for information about V-Plate set-up. | | | | | | | | |
| AG-HMC150 | A-CA74E | P-V257 | C-PANAVC | 9.8 | 13.9 | 10.9 | 8.9 | 6.9 |
| AG-HMC70 | | | | 8.5 | 16 | 10.9 | 10.3 | 8 |
| AG-HMC40 | | | | 5.8 | 23.4 | 16 | 15 | 11.7 |
| HPX-200 | A-CA74E | P-V257 | C-PANCP2 | 14 | 9.7 | 6.6 | 6.3 | 4.8 |
| HPX-170 | | | | 13.8 | 9.8 | 6.7 | 6.3 | 4.9 |
| DVX-100 | | | | 7.2 | 18 | 12.9 | 12.2 | 9.4 |
| JVC | | | | | | | | |
| GY-HMI100 | A-CA74E | P-V257 | C-JVCC | 7.2 | 18 | 12.9 | 12.2 | 9.4 |
| CANON | | | | | | | | |
| XF-300/305 | A-CA74E | P-V257 | C-CANC | 9 | 15.4 | 10.3 | 9.7 | 7.5 |
| XL-H1 | | | | 7.4 | 18.3 | 12.5 | 11.9 | 9.1 |
| XH-G1 | | | | 7.3 | 18.3 | 12.5 | 11.9 | 9.1 |
| XH-A1 | | | | 6.9 | 19.7 | 13.4 | 12.8 | 9.8 |
| EOS 5D | A-CA74E | P-V257 | C-EOSC | - | - | - | - | - |
| EOS 7D MKII | | | | - | - | - | - | - |

Note: Camera power consumption is based on the availability of the manufacturers' published specifications. Estimated runtimes approximate based on a new, fully charged battery.

