


DB25 AND TRS WIRING CHART				
JACK (CHANNEL)	CABLE (COLOR)	TIP OR RING (RED)	SLEEVE (BLACK)	SLEEVE (BARE)
1	BROWN	24	12	25
2	RED	10	23	11
3	ORANGE	21	9	22
4	YELLOW	7	20	8
5	GREEN	18	6	19
6	BLUE	4	17	5
7	PURPLE	15	3	16
8	GRAY	1	14	2

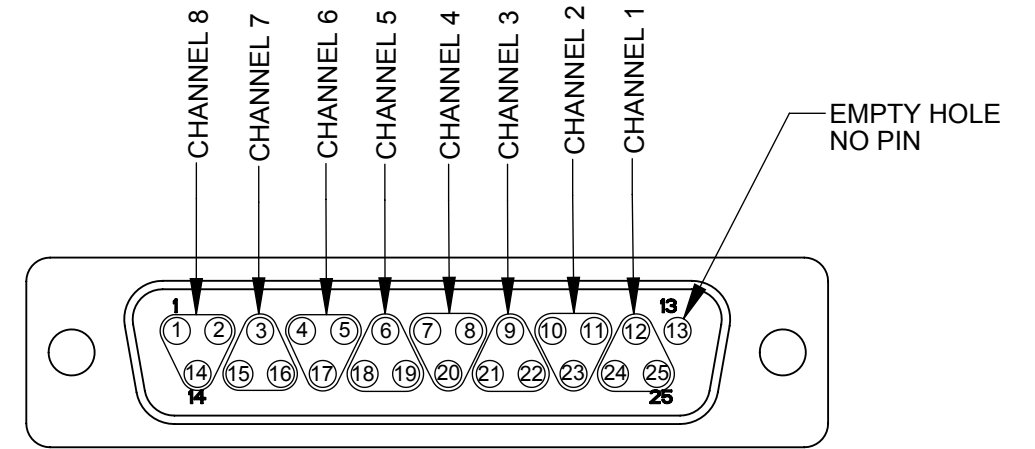

DB25 PIN-OUT VIEW

PART NUMBER	CABLE LENGTH "X"
DB25MM10TRS	10.00 FT +/- 1.50 IN
DB25MM12TRS	12.00 FT +/- 1.50 IN

NOTES:

- BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES.
- THE PRODUCT COMES COILED AND PACKAGED IN A BAG.
- JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (4) AND #M3 THREAD (4) JACKSCREWS.
- MATERIALS:
 TRS PLUG AND HANDLE - COPPER ALLOY, NICKEL PLATED
 H.S. TUBING - THERMOPLASTIC
 DSUB:
 CABLE CLAMP - COPPER, NICKEL PLATED
 SHELL - STEEL, TIN PLATED
 INSULATORS - THERMOPLASTIC
 JACKSCREWS - STAINLESS STEEL
- THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
B	26637	10/11/10	RS	TJK
A	25959	10/6/08	RS	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
 - TWO PLACE DECIMALS ±0.02
 - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE 2:1				
DATE DRAWN	BY	CHKD	APVD						
02/22/08	JGK	RS	TJK						
			12/15/10						
NAME					PART No.				
DB25M INSERT CABLE, RoHS					DB25MM__TRS				
									REV B