

**NEW**

**ELMO**

# **EV-4400AF**

## **VISUAL PRESENTER**



**The Visual Presenter incorporates the latest in high technology & user friendly control level and the most convenient way of use.**

- 18x optical powered zoom with Auto focus/iris
- Digital image magnification and scrolling
- Max. 420x310mm (16.5x12.2") wide shooting area
- More than 470 TV lines high resolution & better than 48dB S/N
- Built-in baselight for transparency/slide film viewing
- Twin upper lighting unit for even and bright illumination
- Operation via front panel, wireless remote control (supplied), mouse (supplied) or RS-232C terminal
- 5" LCD monitor (optional) attachable
- Audio input/output and microphone input
- Auto/push-set white balance control
- Nega/posi, color/B&W conversion
- Internal/external sync
- OSD (on screen display) control
- Flat stage body with foldable camera arm and carrying handle

**All these in one model - ELMO EV-4400AF**

**ELMO**

Visualizing technology since 1921


# VISUAL PRESENTER EV-4400AF

## SPECIFICATIONS

Image pick-up device	1/3" IT CCD 410,000 pixels
Resolution (Horizontal)	More than 470TV lines
S/N ratio	More than 48dB
Lens : Zooming	18x zoom
: F No	2.1-2.4
: f (mm)	4.7-84.6
Close-up lens	Built-in (one-touch flip on-off)
Shooting area (VxH)	420x310mm - 26x20mm (16.5"x12.2"-1.0"x0.8")
Head rotation (front-rear)	Built-in (245°)
Iris	Auto (with level adjustment)
Zooming	Powered
Electronic zooming	Provided
Focusing	Auto focus/Powered focus
White balance	Auto/Push-set
Nega./Posi. conversion	Provided
Color/B&W selection	Provided
Edge enhancement	Provided
Enlargement of the image	Yes (Image from internal camera only)
Scroll	Yes (Image from internal camera only)
On screen display	Provided
Sync. system	Internal/External (Horizontal & Vertical)
Input selection	Internal/AV1/AV2
Composite video output	2 (One each of BNC & RCA connectors)
S-Video output	1 (Mini DIN 4 pin connector)
Audio output	Stereo (RCA connectors)
Microphone input	Provided
Composite video input	x2
S-Video input	x2
Audio input	x2 (stereo)
Upper lighting unit	Built-in (6W x2)
Baselight	Built-in
DC12V output	Provided (for optional LCD monitor)
Wireless (IR) remote control	Supplied
Mouse control	Supplied
Communication	RS-232C
Fiat stage	Provided
Carrying handle	Built-in
Weight	10 kgs (22.1lbs)
Power source	AC120V 60/50Hz
Power consumption	0.5A

Note : Dimensions and weight are approximate.  
Design and specifications are subject to change without prior notice.

## PROFILE

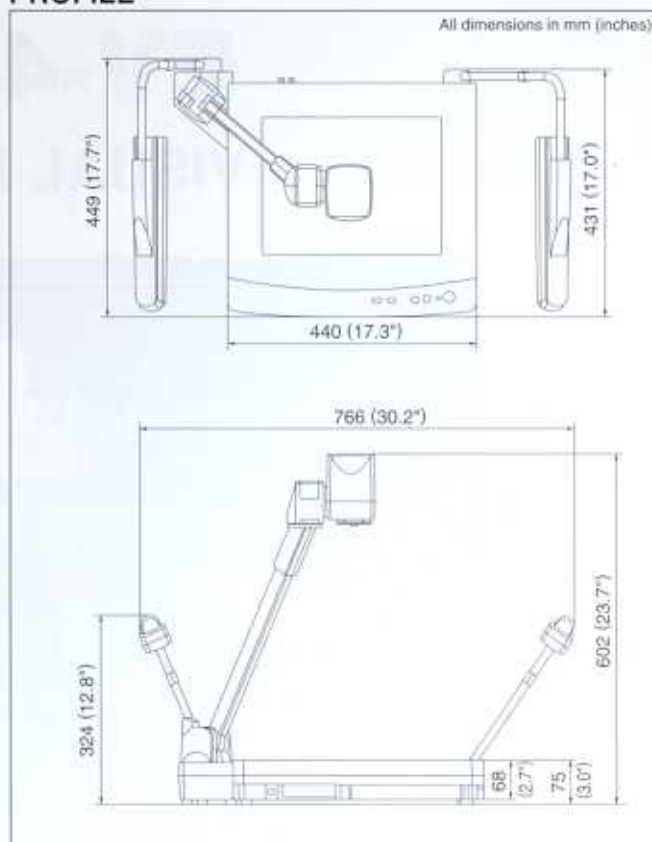

## ELMO ELMO CO., LTD.

6-14, Meizen-cho, Mizuho-ku, Nagoya, 467-8567 Japan E-mail: foreign-div@elmo.co.jp

**ELMO Mfg. Corp.**  
1478 Old Country Road,  
Plainview, NY 11803-5034, U.S.A.  
Tel: 516-501-1400 Fax: 516-501-0429  
E-mail: elmo@elmousa.com  
Web: <http://www.elmousa.com>

**ELMO Canada Mfg. Corp.**  
44 West Drive, Brampton,  
Ontario, L6T 3T6, Canada  
Tel: 905-453-7880 Fax: 905-453-2391  
E-mail: info@elmocanada.com  
Web: <http://www.elmocanada.com>

**ELMO (Europe) G.m.b.H.**  
Neanderstr. 18,  
40233 Düsseldorf, Germany  
Tel: 0211-376051-53 Fax: 0211-376630  
E-mail: elmo@elmo.eu.com  
Web: <http://www.elmo.de>