


KRAMER ELECTRONICS, Ltd.

www.kramerelectronics.com


VP-414xl

Video to Computer Graphics Video/HDTV ProScale™ Digital Scaler (up to UXGA/1080p)





The VP-414xl is a highperformance digital scaler for composite video and s-Video (Y/C) signals. The unit scales a video signal to a selectable computer graphics video or HDTV output signal on a 15pin HD connector.

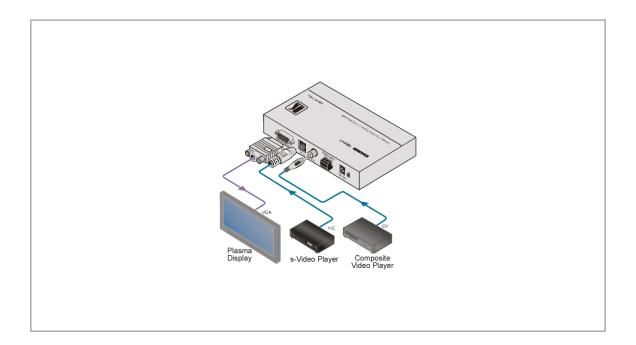



www.kramerelectronics.com

VP-414xl

FEATURES

- Multi-Standard PAL-B & NTSC (3.58).
- HDTV Compatible.
- Input Composite video or s-Video.
- Output 1 computer graphics/HDTV video on a 15-pin HD connector.
- Computer Graphics Output Resolutions VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200) and WUXGA (1920x1200 PAL only).
- HDTV Output Resolutions 480p, 576p, 720p, 1080i, and 1080p in component format on the 15-pin HD output connector.
- Control Front panel input source and output resolution buttons with LED status & contact closure for input selection.
- 3D De-Interlacer.
- 3D Comb Filter.
- Compact MegaTOOLS® 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-T2B rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 CV 1Vpp/75 Ω on an RCA connector; 1 Y/C: 1Vpp/75 Ω (Y), 0.3Vpp 75 Ω (C) on a 4-pin connector.
OUTPUT:	1 VGA (VGA through WUXGA) HD on a 15-pin HD computer graphics video connector.
OUTPUT RESOLUTION:	VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200) and WUXGA (1920x1200 PAL only), 480p, 576p, 720p 1080i, and 1080p (the output Y signal has a bi- level SYNC).
OUTPUT REFRESH RATE	60Hz for computer graphics resolutions, 50/60Hz for HDTV resolutions.
CONTROLS:	Push buttons and LEDs for selection of input source and
	output resolution; Y/C-CV dry contact input selector (external wires).
POWER SOURCE:	output resolution; Y/C-CV dry contact input selector (external
	output resolution; Y/C-CV dry contact input selector (external wires).
SOURCE:	output resolution; Y/C-CV dry contact input selector (external wires). 12V DC, 500mA (typical). 18.8cm x 11.4cm x 2.4cm (7.41"
SOURCE: DIMENSIONS: WEIGHT:	output resolution; Y/C-CV dry contact input selector (external wires). 12V DC, 500mA (typical). 18.8cm x 11.4cm x 2.4cm (7.41" x 4. 5" x 0.95") W, D, H.