




VP-23DS

8-Input Multi-Format Presentation Switcher/Scaler with Stereo Audio



The **VP-23DS** is a high-performance multi-format presentation switcher for composite video, s-Video, computer graphics video and stereo audio signals. It operates as a 2x1 composite video, 2x1 s-Video and a 4x1 computer graphics video switcher each with unbalanced stereo audio and can simultaneously output to an additional computer graphics video output – scaling the composite or s-Video inputs, or passing the computer graphics input.

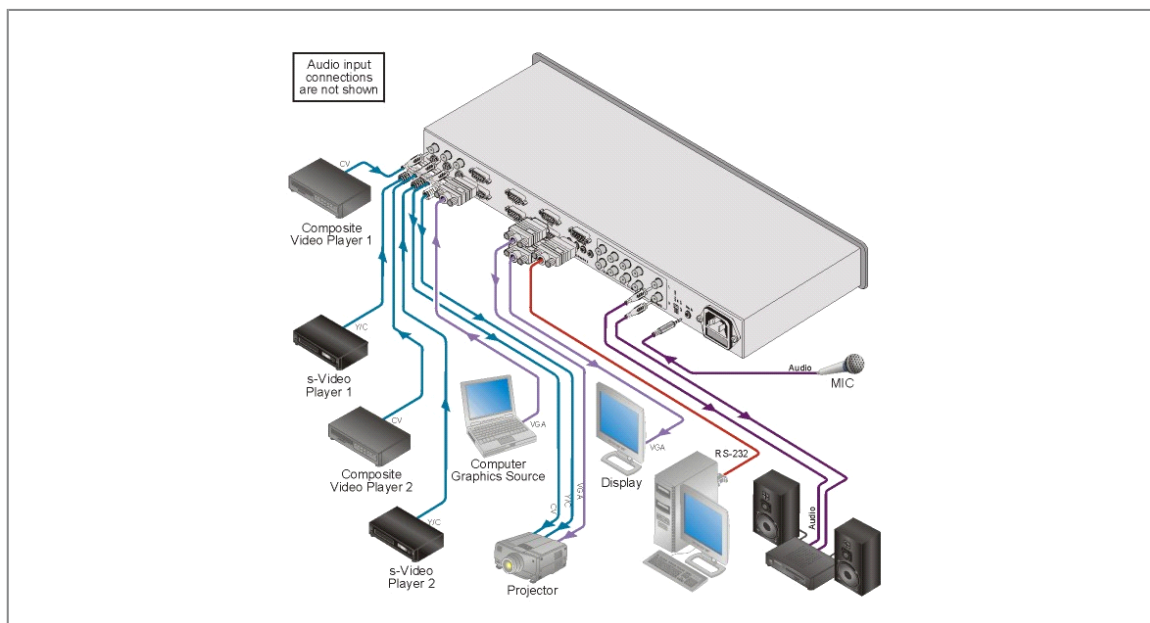



VP-23DS

FEATURES

- High Bandwidth - VGA (400MHz), s-Video/CV (310)MHz, Component (380).
- Scaled Outputs - VGA (640x480), SVGA (800x600), XGA (1024x768) and WXGA (1366x768).
- Master Audio Output - Level Control.
- Microphone Input - Level Control.
- Condenser/Dynamic Microphone Selection.
- Microphone & Audio Mixing - Master audio output.
- Control - Front panel and RS-232.
- Front Panel Control Lockout.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

TECHNICAL SPECIFICATIONS

| | |
|----------------------------|--|
| INPUTS: | 2 composite video, 1Vpp/75Ω on RCA connectors; 2 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4-pin connectors; 4 VGA/UXGA on 15-pin HD (F) connectors; 4 unbalanced stereo audio on 3.5mm mini jacks (for VGA/UXGA) +4dBu/10kΩ; 4 unbalanced stereo audio channels +4dBu/10kΩ on RCA connectors (2 for CV and 2 for Y/C); 1 Mic: 3mV/10kΩ condenser/dynamic on a 6.3mm phone jack. |
| OUTPUTS: | 1 composite video, 1Vpp/75Ω on an RCA connector; 1 s-Video 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on a 4-pin connector; 1 VGA/UXGA on a 15-pin HD (F) connector; 1 VGA/UXGA scaler out on a 15-pin HD (F) connector; 1 unbalanced stereo master audio channel +4dBu/50Ω on RCA connectors; |
| SCALED OUTPUT RESOLUTIONS: | VGA (640x480), SVGA (800x600), XGA (1024x768) and WXGA (1366x768). |
| MAX. OUTPUT LEVEL: | Video: 2.1Vpp, XGA: 0.77Vpp; Audio: 27Vpp. |
| BANDWIDTH (-3dB): | Video: VGA/UXGA: 400MHz; s-Video (Y): 310MHz; Composite/SDI video: 310MHz; Component video: 380MHz; HDTV compatible; Audio: 40kHz. |
| DIFF. GAIN: | <0.07% all channels. |
| DIFF. PHASE: | <0.05Deg all channels. |
| S/N RATIO: | Video: 75dB all channels; Audio: 75dB/1Vpp all channels. |
| CONTROLS: | 10 selector buttons, master audio level, mic audio level, mix, lock, mute, RS-232. |
| POWER SOURCE: | 100-240V AC, 50/60Hz, (115V AC, USA) 7VA. |