


InstaSnake PA200 Series



Audio Products - Adapters

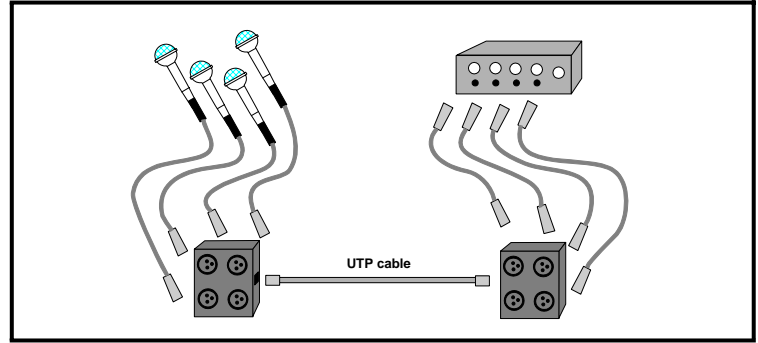

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> • Very easy transport • Low cost • No ground loops • Add second unit to increase the number of channels • May be used for analog or digital audio • Supports 48V phantom power • Rugged, 'road-ready' construction • RoHS compliant • USA Made • 100% tested 	<p>The ETS InstaSnake Series (PA200) is a compact, lightweight, versatile passive group of components allowing you to run audio signals over a single run of CAT5, 5E or 6 cables. With a roll of wire, these compact units are easily transported and/or stored solving dozens of live and/or recording sound problems.</p> <p>The InstaSnake is a passive unit, so you do not need power. The InstaSnake accepts 'mic 'level, line level, analog or digital audio and supports phantom power.</p> <p>The basic units are a pair of passive units with bi-directional capability which can be input directly into analog or digital consoles. Designed to the highest professional standards the InstaSnake has a wide, flat frequency response, low THD and residual noise. The InstaSnake has been factory tested to 1900 feet over CAT5 using low Z dynamic microphones. Phantom power has been tested to 850 feet over shielded cable. PA205 will send phantom power over standard Cat5 or 6 cables.</p> <p>The InstaSnake is available in 2 basic send/receive units which can be mounted in a 2u 19" rack, plus units with pigtailed versions. The PA202P with (4) 18" pigtailed lets you access the mixer without the need for an additional 4 microphone cables.</p>	<ul style="list-style-type: none"> • Live Sound • Recording Studios • TV & Radio Broadcasts • Production/Post Production Houses • Foley/ADR Studios • Hotels • Convention Centers • Churches • Cruise Ships • Auditoriums/Stadiums • Home Studios • Remote & News Trucks • Field Recording

Specifications		Product Ordering Information	
Crosstalk @ 20KHz	-109 dB between Ch1 and Ch2 -102 dB between Ch1 and Ch3 -106 dB between Ch1 and Ch4 -106 dB between Ch2 and Ch3 -106 dB between Ch2 and Ch4 -109 dB between Ch3 and Ch4 -109 dB between Ch3 and Ch4	PA202F	(4) FXLR to RJ45 jack, all pins
Distance	UTP – 1900 ft; Shielded UTP 850 ft	PA202M	(4) MXLR to RJ45 jack, all pins
Connectors	Female or Male XLR to Ethercon RJ45 jack or 110 punchdown (wall plate)	PA202P	(4) MXLR 1.50' pigtail to RJ45 jack, all pins
Dimensions L x W x H	69mm x 62mm (+pigtail) x 36 -PA202P/PA203P 107mm x 70mm x 45mm 117mm x 115mm x 37mm (wall plate)	PA202FP	(4)FXLR 1.50' pigtail to RJ45 jack, all pins
		PA203F	(3) FXLR + (1) MXLR to RJ45 jack, all pins
		PA203M	(3) MXLR + (1) FXLR to RJ45 jack, all pins
		PA203P	(3) MXLR + (1) FXLR 1.50' pigtail to RJ45 jack
		PA205F	(3) FXLR to RJ45 jack, all pins
		PA205M	(3) MXLR to RJ45 jack, all pins
		PA202FWP/ PA202MWP	2 gang brushed steel wall plate, (4) FXLR or MXLR to 110 punchdown
		22518	2u, 19" Rack Mount Panel w 3 blank plates, holds up to 4 InstaSnakes
		CJ5ES	Cat5e Inline coupler, shielded RJ45 jack

Revised 07/07/09



Energy Transformation Systems, Inc.
 43353 Osgood Rd. Unit B, Fremont, CA 94539
 www.etslan.com
 800-752-8208 510-752-8208 Fax 510-656-2026

