



4099B, 4099B Clip Microphone for Bass and more

Perfect for PA amplification and live recording of acoustic upright bass, the 4099B offers a sound that is considerably more natural than an internal microphone or pick-up.

Despite its tiny, discreet size and elegant, lightweight design, 4099B is extremely rugged. The versatile gooseneck provides stable and repeatable positioning. The mics can be easily unclipped and repositioned or moved to another instrument, while the mounting system is designed never to mar or scratch the finish of your instrument nor changing the sonic character of it.

Watch
Chris Minh Doky

video:

- Superior gain-before-feedback
- Natural sound – easy to blend with pick-up
- Flexible and easy mounting
- Mount has no impact on acoustic sound

Reduce cable clutter on stage by using the DAO4099 Double Cable. The cable carries both the 4099 mic extension cable and a pick-up jack connection in one dual cable run in a nylon sock. The jack uses high quality Mogami cable and gold Neutrik connectors. At the instrument end there is a right-angled connector. The microphone extension is the DPA miniature cable.

Through the use of our extensive adapter system, the 4099 can be used as a standard 48V phantom powered microphone via the included XLR connector and is also compatible with virtually any wireless system.

Fleet owners of 4099s will appreciate the multiplicity of using the microphone for a number of different instruments simply by moving the microphone/gooseneck part to another instrument clip from the range.

Perfect for PA amplification and live recording of acoustic upright bass, the 4099B offers a sound that is considerably more natural than an internal microphone or pick-up as well as several excellent placement possibilities.

With its very flexible design for a wide variety of mounting and positioning possibilities along with its extremely natural sound, the 4099 is truly a musician's mic without equal. Continuing DPA's heritage of sonic excellence, this series of microphones achieves the purest reproduction of your instrument and therefore your full range of expression.

The 4099B is a unique clip microphone inheriting the sonic approach from the legendary DPA studio microphones to a new instrument microphone. The 4099B microphone and mounting system is meticulously designed and optimized for the double bass. This is to ensure the best possible mount and audio reinforcement is achieved when performing live. The 4099B attaches to the E and G string below the bridge and allows for microphone capsule placement in the sweet spot between bridge and fingerboard.

Adapters for wireless microphones
A wide range of connection adapters makes it possible to use DPA miniature microphones with all professional UHF, VHF or digital wireless system available plus 48 V Phantom.

Representing years of research and development, the 4099 condenser microphones feature supercardioid polar patterns for superior gain-before-feedback. Fully capable of handling the double bass's dynamic range and subtle details, these microphones live up to their pedigree with sound as accurate as DPA's other world-class microphones.

DPA has specific adapters for AKG, Audio Ltd., Audio-Technica, Beyerdynamic, Electro-Voice, Lectrosonics, Micron, Mipro, Pastega, Telex ProStar, Ramsa, Samson, Sennheiser, Shure, Sony, Toa, Vega and other systems. Each adapter for your cordless microphone is guaranteed to perfectly mate to your system of choice.

For more information please visit:
www.dpamicrophones.com

4099B, 4099B Clip Microphone for Bass and more

Directional characteristics:

Supercardioid

Principle of operation:

Pressure gradient

Cartridge type:

Pre-polarized condenser

Frequency range:

20 Hz to 20 kHz

Frequency range, ± 2 dB, 20 cm (7.9 in) distance:

80 Hz to 15 kHz with 2 dB soft boost at 10 to 12 kHz

Sensitivity, nominal, ± 3 dB:

6 mV/Pa; -44.5 dB re. 1 V/Pa

Equivalent noise level, A-weighted:

Typ. 23 dB(A) re. 20 μ Pa (max. 26 dB(A))

S/N ratio, re. 1 kHz at 1 Pa (94 dB SPL):

71 dB

Total harmonic distortion (THD):

< 1 % up to 123 dB SPL peak; < 1 % up to 120 dB SPL RMS sine

Dynamic range:

100 dB

Max. SPL, peak before clipping:

142 dB

Output impedance:

From MicroDot: 30 to 40 ohm, from DAD6001: 100 ohm

Cable drive capability:

300 m (984 ft) with DAD6001

Output balance principle:

Signal balanced with DAD6001 XLR adapter

Common Mode Rejection Ratio (CMRR):

> 60 dB at 50 Hz to 15 kHz with DAD6001 XLR adapter

Power supply:

Min. 5 V to max. 50 V through DPA adapter for wireless systems; 48 V phantom power ± 4 V with DAD6001 XLR adapter

Current consumption:

1.5 mA; 3.5 mA with DAD6001 XLR adapter

Connector:

MicroDot

Color:

Black

Weight:

33 g (1.16 oz)

Microphone length:

45 mm (1.8 in)

Cable length:

1.8 m (6 ft)

Polarity:

Positively increasing sound pressure produces positive going voltage at MicroDot pin (and pin 2 on DAD6001 XLR adapter)

Operating temperature range:

-40 °C to 45 °C (-40 °F to 113 °F)

Relative humidity:

Up to 90 %


Gooseneck, length:

140 mm (5.5 in)

Diagrams

4099B, 4099B Clip Microphone for Bass and more

The proximity effect exhibited by DPA 4099

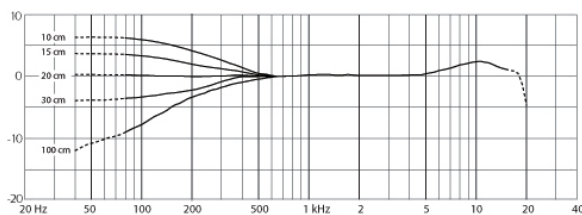


The proximity effect exhibited by DPA 4099

Changes in specifications if you supply less than 48V Phantom power


	48 V	42 V	36 V	32 V	24 V	18 V	12 V	9 V
Noise (dBA)	26	26	26	26	26	26	26	N/A
SPL limit dB	142	142	142	142	136	134	126	N/A
V RMS	3	3	3	2.8	2.5	1.8	0.6	N/A

Changes in specifications if you supply less than 48V Phantom power

Typical on- and off-axis frequency response of DPA 4099 at 20 cm Directional characteristics of DPA 4099 (normalized)
(7.9 in) distance

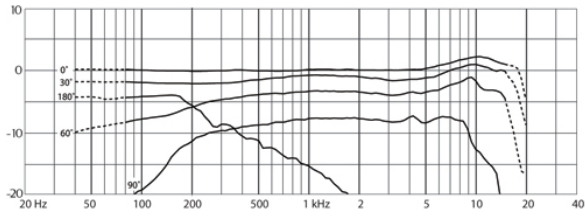

Typical on- and off-axis frequency response of DPA 4099 at 20 cm (7.9 in) distance

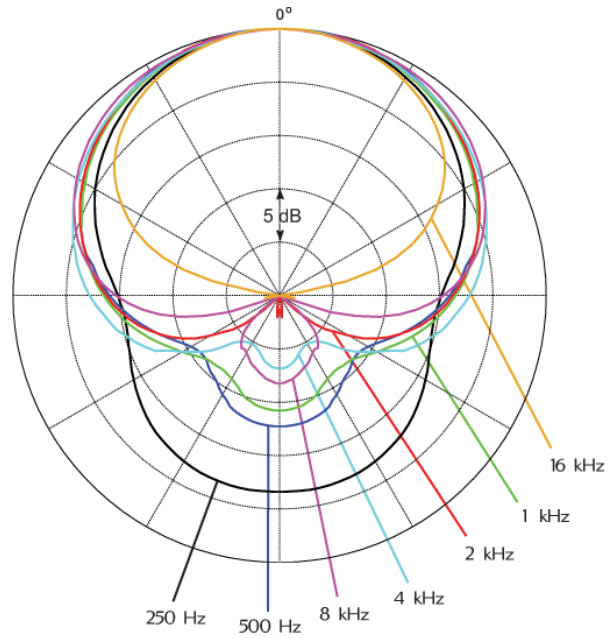

Directional characteristics of DPA 4099 (normalized)



Headquarters:
DPA Microphones A/S
Gydevang 42-44
DK-3450 Allerød, Denmark
Tel: +45 4814 2828
Fax: +45 4814 2700
info@dpamicrophones.com
www.dpamicrophones.com

United States:
DPA Microphones, Inc.
2432 N. Main St., Suite 200
Longmont, CO 80501, USA
Tel: +1 303-485-1025
Fax: +1 303-485-6470
info-usa@dpamicrophones.com
www.dpamicrophones.com