

MULTIMEDIA
PROJECTOR

MX613ST



Features

- Native XGA (1024 x 768) Resolution
- 2800 ANSI Lumens, 5000:1 Contrast Ratio
- HDMI x1, Short-Throw Lens
- 3D-Ready, 3D Color Management
- USB Display, USB Reader, 10W Speaker

Top / Front View




Top



Front

Input and Output Terminals

Back

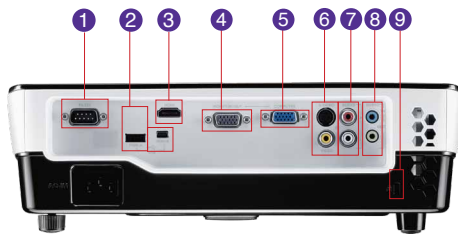

- | | |
|-----------------------|-------------------|
| 1 RS-232 x1 | 6 S-Video / Video |
| 2 USB Type A & Mini B | 7 Audio R/L |
| 3 HDMI x1 | 8 Audio In & Out |
| 4 RGB Out x1 | 9 Kensington Lock |
| 5 RGB In/Component x1 | |

Specifications

| | |
|------------------------|---|
| Native Resolution | XGA (1024x 768) |
| Brightness | 2800 ANSI Lumens |
| Contrast Ratio | 5000:1 (Full on/Full off) |
| Keystone | Manual Vertical +/- 40 Degree |
| Aspect Ratio | 4:3 Native, (5 Aspect Ratio Selectable) |
| Color | Full 1.07 Billion colors palette |
| Lens | F = 2.56 ~ 2.8, F=10.2 ~ 12.24 mm |
| Zoom Ratio | Manual Zoom, 1.2:1 |
| Image Size (Diagonal) | 27" - 300" |
| Throw Ratio | 0.9 to 1.08 (55"@ 3.3 Feet) |
| Lamp Life | 210W, 4000/5000 hours (Normal/Eco-Mode) |
| PC Compatibility | VGA (640 x 480) to UXGA (1600 x 1200) |
| HDTV Compatibility | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility | NTSC, PAL, SECAM |
| Horizontal Frequency | 31-99 kHz |
| Vertical Scan Rate | 23-120 Hz |
| Input Terminals PC/AV | Analog RGB/Component: D-Sub 15 Pin x1 USB (Type A) x1 (Reader) USB Display Mini B x1 HDMI (v1.3) x1 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2 Stereo Mini-Jack x1 |
| Output Terminals PC/AV | Analog RGB: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W Speaker x1 |
| Control Terminals | Serial Connector: RS-232 9 Pin x1 (Male) |
| Dimensions (W x H x D) | 12.3" x 4.1" x 9.6" |
| Weight | 6.2 lbs (2.8 kg) |
| Power Supply | 100 to 240 VAC, 50/60 Hz |
| Power Consumption | 336W (Max), Standby <1W |
| Noise Level | 30/26 dBA (Normal/Eco-Mode) |
| Display Languages | Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese |
| Picture Mode | Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/ User 1 Mode/ User 2 Mode |
| Functions | 3D-Ready/Panel Key Lock/ "Q" Hot Key for FAQ/Security Password/Quick Cooling/Digital Zoom 2x/Quick Auto Search/ High Altitude Mode/Closed Captioning/PC-Free/3D Color Management/Variable Audio Out |
| Accessories (Standard) | Quick Start Guide/User Manual (CD)/Remote Control/Power Cord/VGA Cable |
| Accessories (Optional) | Presentation Plus/Spare Lamp Kit/Soft Carrying Case/Ceiling Mount |
| Lamp P/N | 5J.J3T05.001 |
| Limited Warranty | 1-Year Parts & Labor / 1-Year or 2000 hours of lamp life |

MX613ST_DM_BQus_10/13/11



BenQ America Corp.
15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 Tel: (949) 255-9500 www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

