Under Table IT Interconnect US Version Order No. UT240-312



- Easily installs under a table or inside a podium
- Convenient access to power, AV and network connectors
- · Single power cord
- · Table cutting is not required
- Low profile design
- UL listed

SPECIFICATIONS

General

Pass-Through

Connection Type: (Front To Back)

AC Power: NEMA Receptacle to plug 8 ft (2 m) cord

Network: RJ-45 F (8-PIN) - Punch down (1)

Installation Dimensions

Front width: 10.40 in (264.00 mm) Side width: 3.10 in (79.00 mm) Height: 1.85 in (47.00 mm)

Additional Specification

Finish: Metallic Silver

Accessories Included

Hardware Mounting Screws

Mechanical

T° Operating 10°C-35°C T° Maximum 50°C

Humidity 90% non-condensing

Electrical

Pass-Through Signals: All standard audio, video, network, and modem signals are acceptable.


Pass-Through: AC 600W max.

Certifications

UL, CUL, CE, RoHS, FCC

Warranty

3 year warranty

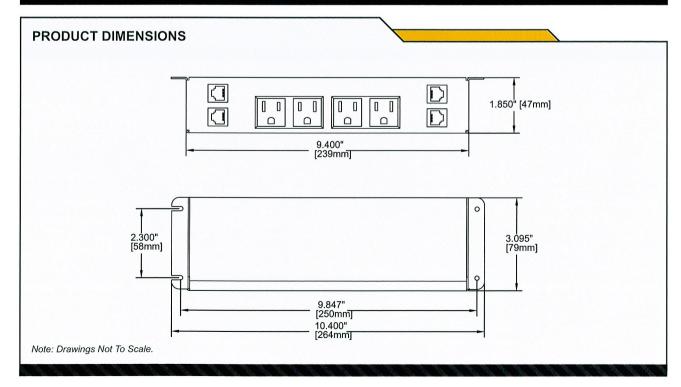

0

Under Table IT Interconnect US Version Order No. UT240-312

0 0

Ω

OPTIONS FOR UT240-312

Order No. UT240-312

Standard Configuration:

4ea US AC receptacle 95~120V/1.2A, 10ft (3.05m) 4ea Network RJ45 (F) snap-in connector 1ea 15A circuit breaker

OPTIONS SOLD SEPARATELY

Section No. 1 (Connectors)

CM11308: 4-PIN Mini-DIN, F-F CM11309: 6-PIN Mini-DIN, F-F CM11310: 8-PIN Mini-DIN, F-F

CM11315: Black Shielded 10-PIN RJ45

CM11302: Black RCA, F-F CM11303: Red RCA, F-F CM11304: Yellow RCA, F-F

CM11365: H-Position Control and Signal Present LED

CM11311: BNC (Composite Video), F-F

CM11312: Momentary Contact Closure to bare leads CM11313: Latching Contact Closure to bare leads CM11314: Green LED Indicator to bare leads

CM11341: HDMI F-M CM11306: Grev RJ-11, F-M

CM11318: White RJ-11 6-PIN, F-M CM11319: Black RJ-11 6-PIN, F-M CM11351: Red CAT-6, RJ45, F-M CM11352: Black CAT-6, RJ45, F-M CM11353: Yellow CAT-6, RJ45, F-M CM11358: White CAT-6, RJ45, F-M

CM11359: Orange CAT-6, RJ45, F-M CM11354: Green CAT-6, RJ45, F-M

CM11355: Blue CAT-6, RJ45, F-M CM11364: Black 3-PIN Mini XLR M-F CM11408: White 4-PIN Mini XLR M-F CM11366: USB-B F - USB-A M CM11369: USB A F-M

0 0

CM11316: 3.5mm Stereo Audio, F-M

CM11301: Blank Connector

0 0

Picture Above Show UT240-312

