


# TNP162

Tilt-N-Plug Jr.® - AV & Data

Order No. TNP162

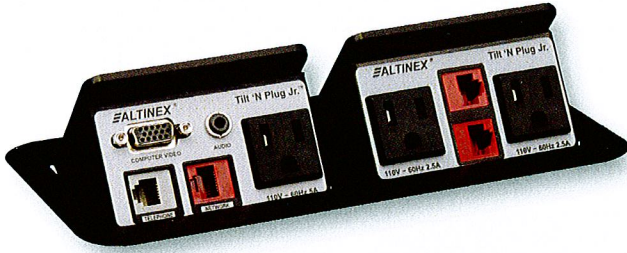

- Multiple user connection point
- Gas-spring technology provides smooth open and close
- Craftsman-milled edges create ultra-flat surface when closed
- Ships with 6ft pre-terminated cables for quick installations
- Customizable connectors and finish

## SPECIFICATIONS

### General

AC Power: NEMA 5-15 (3 female to 2 male)  
 Computer Video: 15-PIN HD F-M (1)  
 Stereo Audio: 3.5 mm F-M (1)  
 Network: CAT6 (RJ-45) F-M (3)  
 Telecom: RJ-11 F-M (1)  
 Accessories Included: Mounting screws, cable clamps

### Mechanical

AC Power Cord: 10 ft (3 m)  
 Audio, Video, and Communication: 6 ft (2 m)  
 Max. Table Thickness: 2.3 in (58 mm)  
 Height, opened: 5.5 in (140 mm)  
 Depth: 4.9 in (124 mm)  
 Weight (approx.): 5.1 lb (2.3 kg)

Shipping Weight: 6.8 lb (3.1 kg)  
 Finish: Matte Black (default)  
 T° Operating: 10°C-35°C  
 T° Maximum: 40°C  
 Humidity: 90% non-condensing


### Electrical

Dual AC Tilt-Up Module: 2.5 A per connector max.  
 110 VAC, 60 Hz  
 Single AC Tilt-Up Module: 5 A max. 110 VAC, 60 Hz

### Warranty

3 year warranty  
 1 year warranty on gas-spring

## PRODUCT DIMENSIONS

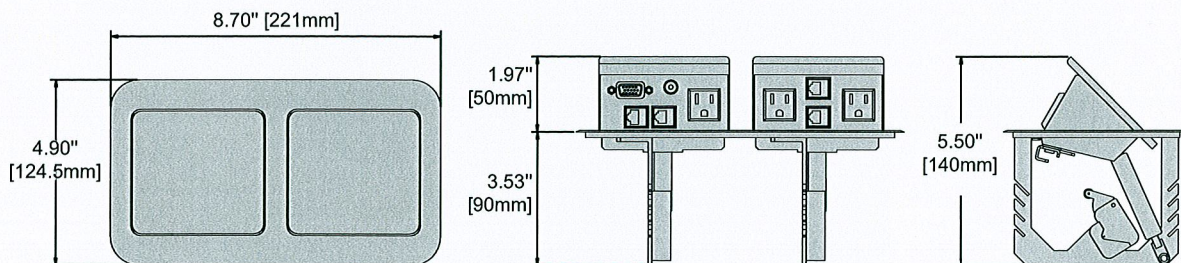

Note: Drawings Not To Scale.

## OPTIONS FOR TNP162C

Order No. TNP162C

### Section No. 1 (Surface Finish)

- CM12311: Black
- CM12385: Brushed Aluminum

### Section No. 2 (Computer)


- CM11402: 15-PIN HD, F-F
- CM11403: 9-PIN D, F-F
- CM11406: 15-PIN HD, F-M
- CM11410: 9-PIN D, F-M
- CM11401: Blank D-Sub Cover, Black

### Section No. 3 (Audio)

- CM11404: 3.5 mm Stereo Audio, F-M
- CM11405: Blank Cover for 3.5 mm Audio

### Section No. 4 (Connectors)

- CM11308: 4-PIN Mini-DIN, F-F
- CM11309: 6-PIN Mini-DIN, F-F
- CM11310: 8-PIN Mini-DIN, F-F
- CM11315: Black Shielded 10-PIN RJ45
- CM11302: Black RCA, F-F
- CM11303: Red RCA, F-F
- CM11304: Yellow RCA, F-F
- CM11365: H-Position Control and Signal Present LED
- CM11311: BNC (Composite Video), F-F
- CM11312: Momentary Contact Closure to bare leads
- CM11313: Latching Contact Closure to bare leads

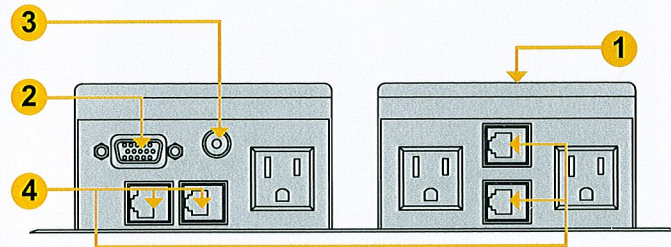


- CM11314: Green LED Indicator to bare leads
- CM11316: 3.5 mm Stereo Audio, F-M
- CM11341: HDMI F-M\*
- CM11306: Grey RJ-11, F-M
- CM11318: White RJ-11 6-PIN, F-M
- CM11319: Black RJ-11 6-PIN, F-M
- CM11351: Red CAT-6, RJ45, F-M
- CM11352: Black CAT-6, RJ45, F-M
- CM11353: Yellow CAT-6, RJ45, F-M
- CM11358: White CAT-6, RJ45, F-M
- CM11359: Orange CAT-6, RJ45, F-M
- CM11354: Green CAT-6, RJ45, F-M
- CM11355: Blue CAT-6, RJ45, F-M
- CM11364: Black 3-PIN Mini XLR M-F
- CM11408: White 4-PIN Mini XLR M-F
- CM11366: USB-B F-USB-A M
- CM11369: USB A F-M\*
- CM11301: Blank Connector

Picture Above Show TNP162C

\*Restricted to left-most connection point only.

## TABLE CUTOUT DIMENSIONS

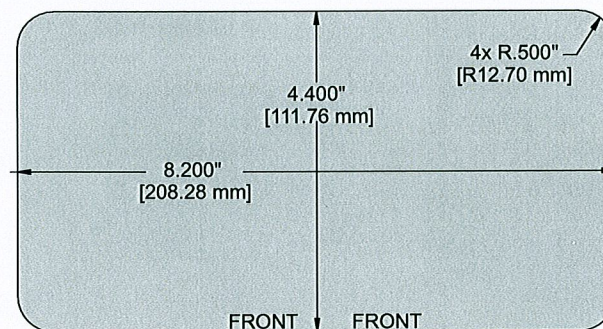

Note: Drawings Not To Scale.