

## Studio Monitors

# TRUTH B1031A

### High-Resolution, Active 2-Way Reference Studio Monitor with 8" Kevlar Woofer

- Ultra-linear studio monitor with true active design
- Precision Class A/B amplifiers with active protection circuits: 100 W for LF / 50 W for HF
- Ultra-high resolution 1" silk dome tweeter for ultimate sound reproduction
- Long-throw 8" woofer with deformation-resistant Kevlar cone for ultimate bass response
- Ultimate dispersion characteristics and extremely large "sweet spot" owing to advanced wave guide technology
- High-precision crossover network with 4<sup>th</sup> order Linkwitz-Riley filters
- Adjustable to a wide range of acoustic conditions
- Separately controlled limiter for low and high frequency overload protection
- Magnetic shielding allows placement near computer monitors
- "Planet Earth" power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus low power consumption for energy saving
- Servo-balanced inputs with XLR, ¼" and unbalanced RCA connectors
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany



### Honesty

When it comes to your studio recordings, you want honesty. In fact, considering how important your art is, you should demand it! That's why we designed the new B1031A Reference Monitors to speak nothing but the TRUTH. Oh, they still sound great hooked up to your stereo or your video surround system, but they were really built with the studio in mind — where every note you play or sing is "under the microscope."

### Built on a Legacy

Our monitors have been so wildly successful that we've sold thousands upon thousands of them to some of the most critical ears on the planet — ears that demand the neutral sound of a true reference monitor. Ask any recording engineer and they will tell you that listening to a recording on just a single set of monitors doesn't always

paint an accurate picture of the mix. Since people listen to music at home, in their cars, on mp3 players, etc., it is critical your final mix be heard on as many sizes and types of speakers as possible. That's the reason we created these B1031A monitors, plus they make ideal rear channel speakers for surround sound applications.

### Years of R'n'D

For the past three years our Research and Development team has been on a mission to create the "perfect" studio monitor. Our acoustic engineers tried a variety of transducers and enclosure designs, along with existing and emerging technologies. When all the dust settled, they chose to deploy an ultra-high resolution 1" dome tweeter and a long-throw 8" Kevlar-coned woofer in the B1031A.

*Continued on next page*



# TRUTH B1031A

## Why Kevlar?

We're glad you asked. Kevlar has an incredible strength-to-weight ratio — that's one reason it's used in bulletproof vests. Kevlar gives our LF transducer the strength to handle the extremely high energy levels required for distortion-free, chest-pounding bass. And since they have such low mass, Kevlar speaker cones also respond much more quickly than those made of paper, important for not only maintaining bass content integrity, but critical for midrange accuracy and definition. Our Kevlar transducers reproduce even the subtlest nuance of the low-frequency realm without muddying the midrange.

## Power to the People

It takes quite a bit more than just a "bulletproof" woofer and a high-tech tweeter stuck inside a fancy box to make a studio monitor of this class. It also takes power — and lots of it! But even more importantly, that power has to be matched to the individual high- and low-frequency transducers. While some of our competitors are content to stick whatever speakers they have on the shelf into haphazardly designed boxes and then strap on a one-size fits-all amplifier package, we build every single component from the ground up.

We pack 150-Watts of biamped technology (including a time- and phase-corrected active crossover) into every B1031A, ensuring that you have the enormous power reserves you'll need to drive them really hard.

## Designed to Work in Your Environment


The ideal environment for listening is a linear sounding room neither too reflective (too much reverb and echos) nor too absorptive (muffled and unnatural sound). But since all rooms are not the same acoustically, all TRUTH monitors come equipped to function in a wide variety of situations. Switches are provided to adapt the monitor's low- and high-frequency characteristics for optimal performance specific to your listening environment.

Placement is also critical. Ideally, all loudspeakers should be placed away from walls to ensure proper bass response. But fear not, B1031A monitors feature Room Compensation switches so you can place them against walls, or even in corners.


Walls tend to enhance low frequency content, and corners exaggerate bass even more, but your TRUTH monitor can be custom-tailored to provide honest bass response for your situation, with the simple flick of a switch or two.

*Continued on next page*

## Recording

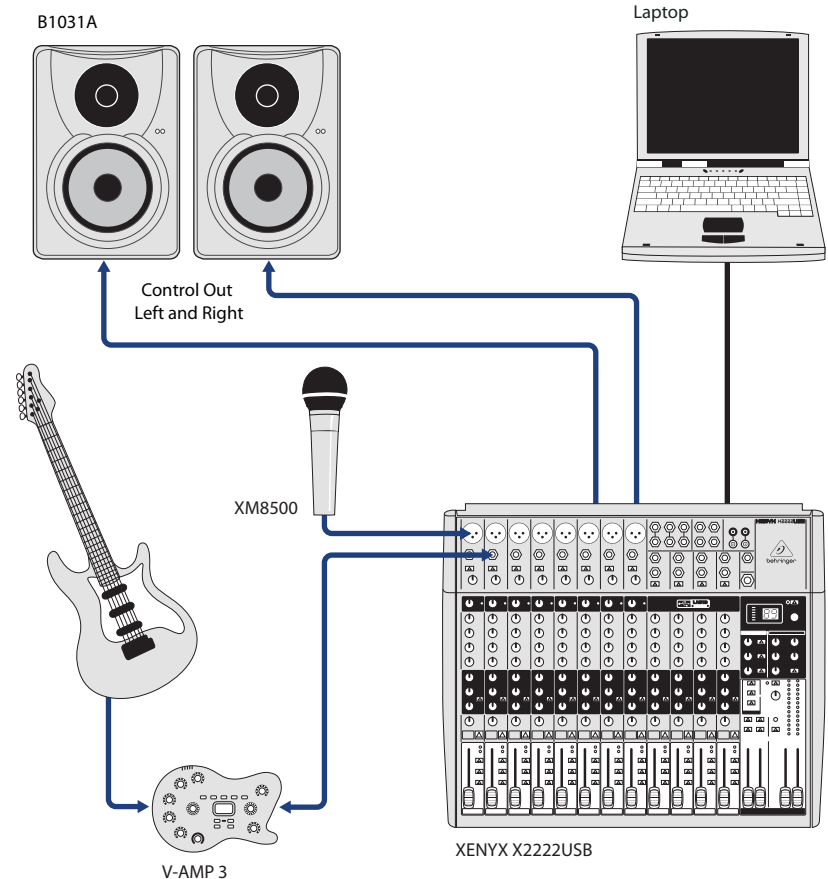

## Computer Monitoring

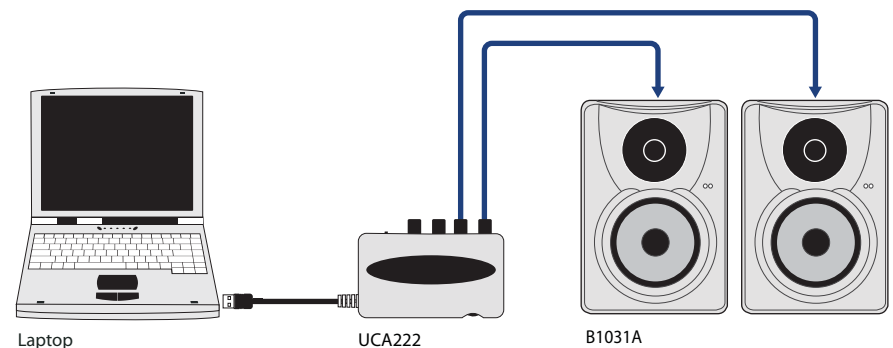

# TRUTH B1031A

## Non-fatiguing, Wide “Sweet Spot”

While some of our competitors’ studio monitors have a highly focused “sweet spot” (the optimal listening position for a pair of loudspeakers), our wave-guide is designed to create a much more generous, broader listening zone. That means you won’t wear a hole in the carpet in that one spot where everything sounds great. You are free to move around inside the stereo image to find the ideal spot in the mix for subtle instrument or effects placement opportunities.

You also won’t suffer the ravages of “monitor-fatigue-syndrome,” an ailment that comes from listening to harsh high-mids and treble content for hours on end — a pretty important consideration for those all-night mixdown sessions that can really test your nerves.

## What’s Up with the RCA Connectors?

Yes, it is a bit unconventional to put RCA sockets on a studio monitor — but why not? Now you can connect B1031A loudspeakers to your computer, mp3 player or television receiver for amazing sonic performance. For a truly versatile setup, use one of our USB audio interfaces (the UCA222, for example) to connect to/from your computer. This convenient setup allows


you to monitor your recording projects, and mix and master them, directly from your computer.

## Hearing is Believing


We could bore you to tears with all the technical jargon (if you really like that stuff, there’s a special treat at the end),

but hearing the TRUTH will make you a believer. From the “bulletproof” bass of its Kevlar woofer to the silky top-end of its HF dome tweeter, we think you’ll agree that nothing in this class outperforms the B1031A. Compare them to the competition and own BEHRINGER!


## Surround Setup

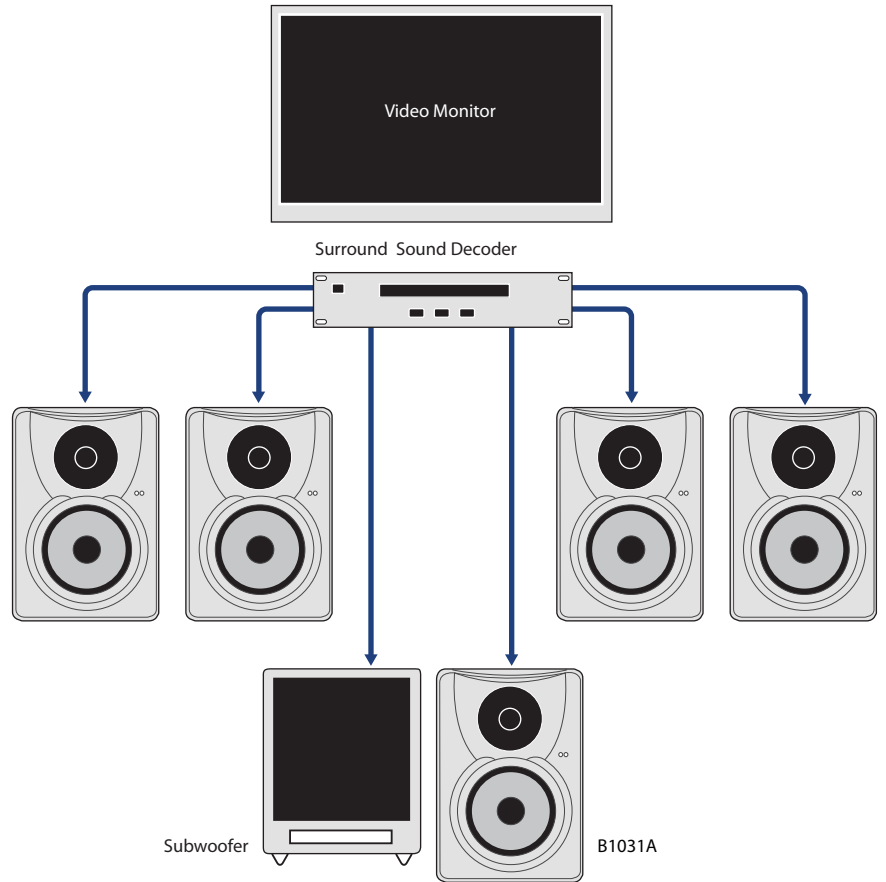

## Front View Panel

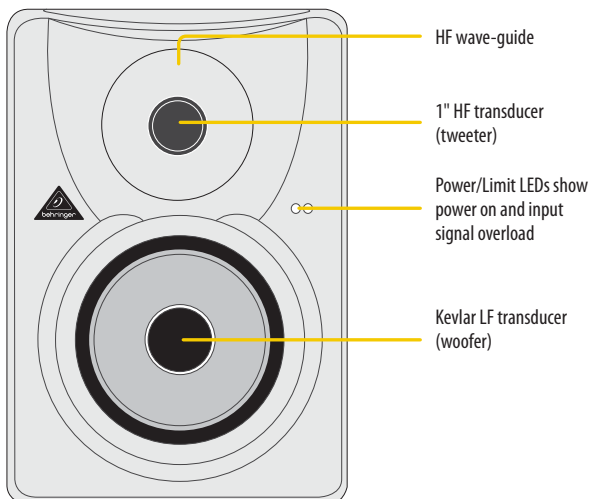

## Rear View Panel

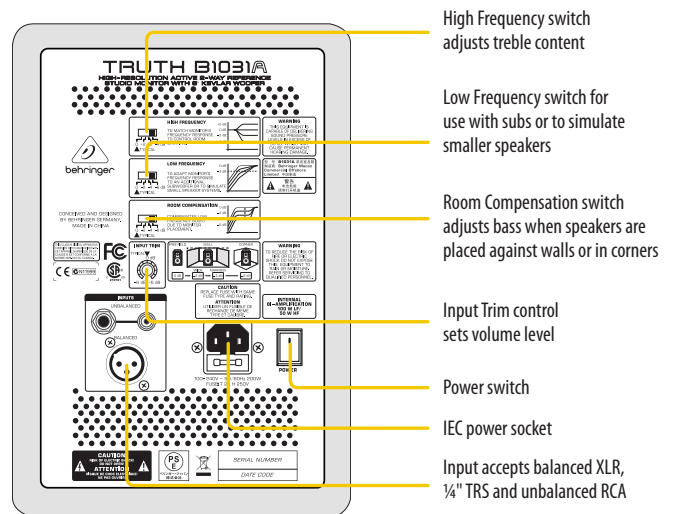

# TRUTH B1031A

## Specifications

Audio Inputs	
XLR connector	balanced input
¼" TRS	balanced input
RCA	unbalanced input
Input impedance	10 kΩ
Input Trim	-6 dB to +6 dB
Max. input level	+20 dB

Transducer	
High-frequency driver	Ultra-high resolution 1" dome tweeter
Low-frequency driver	8" woofer

Amplifier Output Power	
<b>Low-frequency range</b>	
RMS @ 0.1 % THD (sine wave)	70 W @ 4 Ω
Peak power	100 W @ 4 Ω
<b>High-Frequency Range</b>	
RMS @ 0.1 % THD (sine wave)	33 W @ 4 Ω
Peak power	50 W @ 4 Ω

Crossover	
Type	Active
Crossover frequency	2.5 kHz
System Specification	B1031A
Frequency Response	-3 dB 35 Hz to 20 kHz
Sound pressure level	max. 113 dB SPL @ 1 m (pair)

Frequency Band Allocation	
Low frequency	0 dB @ 60 kHz -2 dB @ 60 kHz -4 dB @ 60 kHz -6 dB @ 60 kHz
Room compensation	0 dB @ 300 kHz -2 dB @ 300 kHz -4 dB @ 300 kHz -6 dB @ 300 kHz
High Frequency	+2 dB @ 8 kHz 0 dB @ 8 kHz -2 dB @ 8 kHz -4 dB @ 8 kHz

Power Supply	
Fuse	100 – 240 V~, 50/60 Hz T 2 A H 250 V
Power consumption	200 W
Mains connection	Standard IEC connector

Dimensions/Weight	
Dimensions (HxWxD)	15.5 x 10.3 x 13.58" 393 x 261 x 345 mm
Weight	11.3 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

**Europe** MUSIC Group Services EU GmbH  
Tel.: +49 2154 9206 4149 / Fax: +49 2154 9206 4199

**USA/Canada** MUSIC Group Services US Inc.  
Tel.: +1 425 672 0816 / Fax: +1 425 673 7647

**Singapore** MUSIC Group Services SG (Pte.) Ltd  
Tel.: +65 6845 1800 / Fax: +65 6214 0275

**Australia** MUSIC Group Services AU Pty Ltd  
Tel.: +61 03 9877 7170 / Fax: +61 03 9877 7870

**Japan** MUSIC Group Services JP K.K.  
Tel.: +81 3 5281 1180 / Fax: +81 3 5281 1181

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULFILLERS AND RESELLERS ONLY. ALL RIGHTS RESERVED. © 2011 MUSIC Group IP Ltd, Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00458