



Date: _____ Type: _____

Firm Name: _____

Project: _____





ColorBlast TR

Rugged, full-color LED spotlight for entertainment environments

**Higher
Output**

**16-bit
Control
Capable**

ColorBlast TR is a rugged, full-color LED fixture designed specifically to withstand taxing stage, set, and touring environments. This rental-friendly fixture offers ease of installation and control, along with the ability to produce millions of saturated colors without gels or filters. It features a built-in power cable that can be extended up to 60 ft (18 m) with a standard 4-pin XLR patch cable, an elastomeric sleeve to protect the fixture from rough handling, and a pivoting bezel for easy exchange of lenses. An industrial-grade hinge affords quick and reliable fixture aiming and locking. The mounting base easily accommodates truss clamps and other mounting and positioning options. Designed with live entertainment in mind, ColorBlast TR is the ideal color-changing LED fixture for demanding temporary and touring environments.



- Pivoting bezel and exchangeable lenses — The pivoting bezel and included 23° soft-focus and 10° clear tempered glass lenses let you switch quickly between soft-edge wash lighting and extended beam projection.
- Quick fixture aiming and locking — An industrial-grade constant torque hinge offers stable, 110° fixture tilting for quick and dependable aiming. Standard set screws let you lock the fixture in position without special tools.
- Versatile mounting options — The pre-assembled mounting base offers a range of options for mounting on the floor or various stage truss clamps. An integral safety bracket lets you easily attach a safety cable.
- On-board temperature monitoring — A compensation circuit prevents damage to the fixture if operating temperatures rise to unsafe levels. An auto-cycling feature automatically restores normal operation after 30 minutes.

- Innovative protective sleeve — Because stage and set environments can take their toll on equipment, ColorBlast TR features an innovative elastomeric sleeve to protect the fixture and lens from the rigors of multiple setups and teardowns.
- Accessories and additional spread lenses — City Theatrical Inc. offers a line of accessories designed for ColorBlast TR, including top hats, half top hats, barndoors, egg crate louvers, glass spread lenses, and polycarbonate holographic lenses.
- Industry-standard power and control — ColorBlast TR works seamlessly with the full range of Philips DMX controllers, including Light System Manager, iPlayer 3, and Philips Strand, or any third-party DMX controller. City Theatrical Inc. offers a line of power / data supplies specifically designed for use with ColorBlast TR fixtures.

For detailed product information, please refer to the ColorBlast TR Product Guide at www.colorkinetics.com/ls/rgb/colorblast12tr/

PHILIPS

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	10° Beam Angle	23° Beam Angle
	Lumens*	960	859
	LED Channels	Red / Green / Blue	
	Mixing Distance	6 in (152 mm) to uniform light	
	Lumen Maintenance†	50,000+ hours L50 @ 50° C (ambient) full output	
Electrical	Input Voltage	24 VDC via PDS-750 TRX, PDS-375 TRX, PDS-750 TR, PDS-150e, or PDS-60	
	Power Consumption	50 W maximum at full output, steady state	
Control	Interface	DMX via PDS-750 TR Fixture firmware addressable 8- or 16-bit control	
	Control System	Philips full range of controllers, including Light System Manager, iPlayer 3, and Philips Strand, or third-party controllers	
Physical	Dimensions (Height x Width x Depth)	8 x 13.5 x 2.6 in (203 x 343 x 66 mm)	
	Weight	6.4 lb (2.9 kg)	
	Housing	Die-cast aluminium, powder-coated black finish	
	Lens	Clear glass	Frosted glass
	Fixture Connections	6 ft (1.8 m) power / data cable with 4-pin XLR connector	
	Temperature Range	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage	
	Humidity	0 – 95%, non-condensing	
Certification and Safety	Maximum Cable Length	60 ft (18 m), with extension to built-in 6 ft (1.8 m) power cable	
	Certification	UL / cUL, FCC Class A, CE, PSE	
	Environment	Dry Location, IP20	

* Lumen measurement complies with IES LM-79-08



† L50 = 50% lumen maintenance (when light output drops below 50% of initial output). Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to www.philipscolorkinetics.com/support/appnotes/lm-80-08.pdf for more information.

Fixtures and Accessories

Item	Item Number	Philips 12NC
ColorBlast TR	116-000023-00	910503700581
Replacement Protective Sleeve	120-000062-00	910503700370
Replacement Mounting Base	120-000060-00	910503700369
Replacement Lenses (23° frosted glass and 10° clear glass)	120-000066-00	910503700367

PDS-750 TR	109-000019-00	910503700101
SmartJack Pro	103-000024-00	910503700582

Accessory Holders: Black	120-000003-04	—
Half Top Hats: Black	120-000009-04	—
Top Hats: Black	120-000005-04	—
Egg Crate Louvers: Black	120-000015-04	—
Barndoors: Black	120-000019-04	—
Horizontal Spread Lens: 36° / 50°	120-000025-00	—
Horizontal / Vertical Spread Lens 40° / 40°	120-000025-01	—


Use Item Number when ordering in North America.




Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Photometrics

10° beam angle

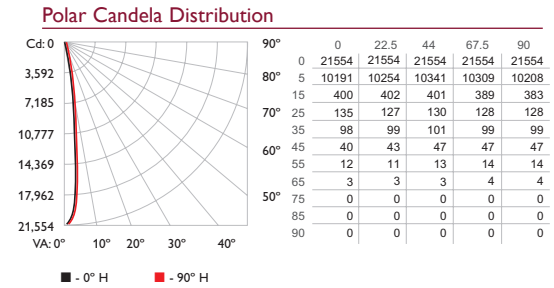


Illuminance at Distance

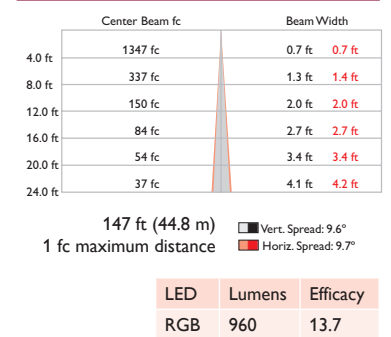


For lux multiply fc by 10.7

23° beam angle

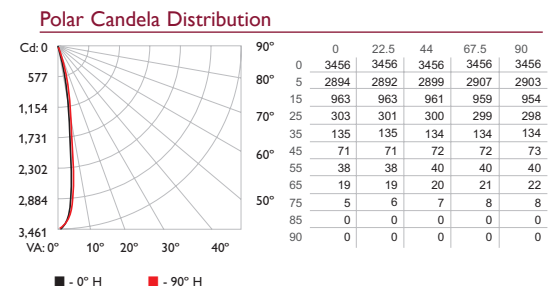

Illuminance at Distance

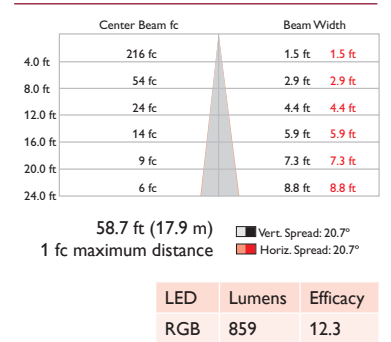

Copyright © 2010 - 2011 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000027-01 R05 11-11