



TANNOY

TANNOY®

arena
HIGHLINE 300

OWNER'S MANUAL

CONTENTS

INTRODUCTION	3
SATELLITE	
What's in the box?	4
How to wall mount	5
STAND MOUNT	
What's in the box?	8
How to stand mount	9
CENTRE CHANNEL	
What's in the box?	10
How to wall mount	11
TOWER	
What's in the box?	13
How to connect	14
ROOM SET UP	15
CONNECT TO RECEIVER	16
SPECIFICATIONS	17

**WARRANTY**

This equipment has been produced and tested with care and precision. All Tannoy speaker systems are built to give first class service and carry a 5-year warranty. Active subwoofers carry a 1-year warranty.

If the equipment proves to be defective within this period for any reason other than accident, misuse, unauthorised modification or fair wear and tear, Tannoy will repair any such defect or, at our option, replace it without charge for parts, labour or return carriage. This warranty is given in addition to the customer's statutory rights. If you suspect a problem with your loudspeakers please contact your local Tannoy dealer who will be able to advise on appropriate action.

IMPORTANT NOTES

Please ensure no bare wire touches the metal cabinet.

Please do not attempt to remove the grilles from the products as they are designed not to be removed. The product has been voiced with the grilles on.

No maintenance of this product is required. Use a dry, lint free cloth to clean the cabinet if required

No loudspeaker cables are supplied with the Arena Highline speakers.

We would recommend figure of eight speaker cables with $2 \times 1.5\text{mm}^2$ cross sectional area.

INTRODUCTION

Thank you for selecting Tannoy loudspeakers developed in the UK by our dedicated team of design engineers. The Tannoy Arena Highline 300™ speakers are designed to blend perfectly into your room and provide a sound stage which is at least as good as you would hear in a commercial movie theatre, but in the comfort of your own home. You have a choice of speakers, mounting brackets and floor-stands to help you to get the very best sound quality and appearance. Tannoy Professional Studio Monitor speakers are used by mixing engineers, producers and directors in the creation and production of many movie soundtracks. Tannoy Arena Highline 300™ home cinema speakers are engineered with the same technology, design and manufacturing principles as Tannoy Studio Monitors to create realistic special effects with clear crisp dialogue capability. The carefully designed appearance of Tannoy Arena Highline 300™ system components allows discreet placement of the speakers giving the movie screen pride of place as the centre of the visual movie action.

TANNOY WIDEBAND™

Tannoy has incorporated its own WideBand™ technology into the design of all Arena Highline loudspeakers. Not only does this exceptional in-house technology resolve fine detail of high frequency information but it also effectively enhances the listening experience throughout the whole frequency range. The WideBand™ high frequency system creates an increased immediacy, airiness and impact making music sound more natural and true to life. Music contains transient information and rich harmonics beyond the range of human hearing for pure tones. Even bass notes have leading edge transients reaching 30kHz. Operating between the roll-off point of the exclusive Tannoy mid-bass driver unit and 51kHz, the Tannoy WideBand™ high frequency unit will accurately reproduce the leading edge of individual notes allowing the listener to experience the entire bandwidth information of instruments. In addition, the extension of the frequency response, by fully two octaves, corrects time and phase response within the bandwidth of normal human hearing. Taking these acoustical phase anomalies beyond the audible range adds realism to the soundstage through improvements in imaging and the placement of instrumentation and movie special effects.

SATELLITE


What's in the box?

- 1 x Satellite speaker
- 1 x Long wall bracket
- 1 x Short bracket with pre-fitted cap
- 1 x Short bracket without pre-fitted cap
- 1 x Bracket cap
- 4 x 8mm Silver hex socket fixing screw + lock washers
- 1 x 5mm black cap head fixing screw + spring washer
- 1 x Ball nosed Allen key



Required but not included:

- Sufficient cable for your requirements
- Countersunk fixing screws suitable for your wall type
- Screwdriver for above fixing screws
- Spirit level

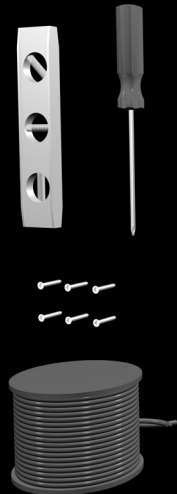

SATELLITE


How to wall mount

WARNING: It is your responsibility to ensure that the bracket to wall fixing screws or bolts and the walls themselves are strong enough to support the weight of the speaker – refer to the speaker weight specifications supplied in this manual. Particular care is needed when fixing to hollow or cavity walls - "stud" walls. Use only professionally recommended fixing devices which will spread the load of the brackets and fixing screws over an area of the wall surface when mounting to cavity walls. Pay particular attention to the possibility of electrical cables and gas or water pipes which may be present in the wall cavity or buried in the wall surface. Use a special cable or metal proximity locator to locate these obstacles if in any doubt.

Before wall mounting the bracket, ensure sufficient clearance to hook the speaker onto bracket (approx half speaker length above bracket).

Use a spirit level to ensure the bracket is fitted level.

Mount the wall bracket on the wall with a suitable fixing (not supplied – see warning note above)

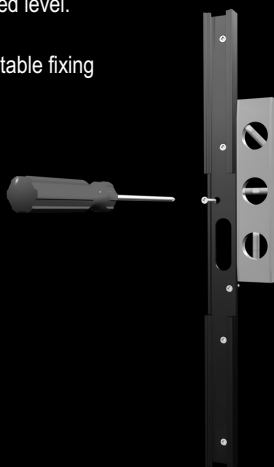

Ensuring cap is uppermost, using 8mm screws and washers provided, attach bracket with pre-fitted cap to top two fixing points on speaker.

Attach bracket without pre-fitted cap to bottom two fixing points using 8mm screws and washers provided.



arena
HIGHLINE 300

SATELLITE

How to wall mount - continued


Cut the speaker wire so that the (+) side is slightly longer than the (-) side and feed the speaker wire through spare bracket cap.

Important Note:


It is essential that the speakers are wired correctly at this stage. The (-) wire should have a solid black line, or similar, marked along it.

Screw (+) wire into red terminal and screw (-) wire into black terminal.

Offer speaker up to wall bracket half way above it, engage speaker and slide down

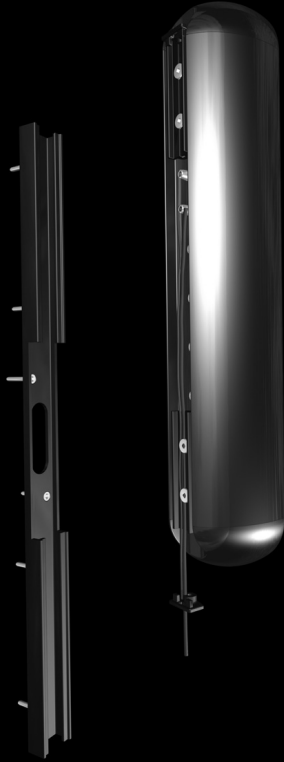


Ensure cap is fully engaged with wall bracket

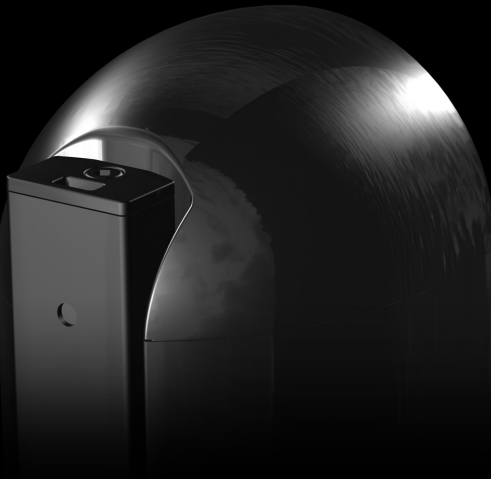

SATELLITE How to wall mount - continued

Fix spare cap to bottom of bracket using cap screw and spring washer provided

TANNOY®


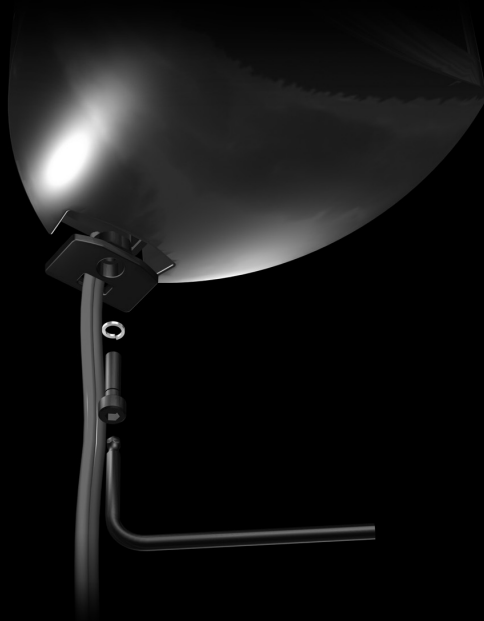


arena
HIGHLINE 300

STAND MOUNT

What's in the box?


- 1 x Stand mount
- 2 x Lock washers
- 2 x Fixing screws
- 6 x Spikes
- 6 x Rubber feet
- 6 x M6 nuts

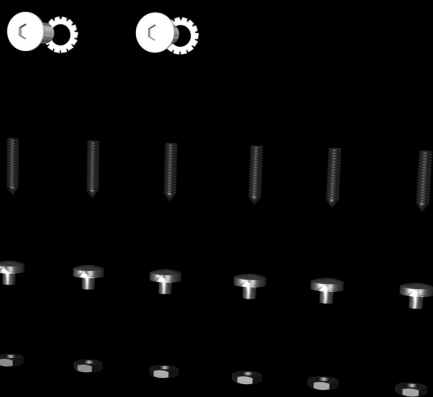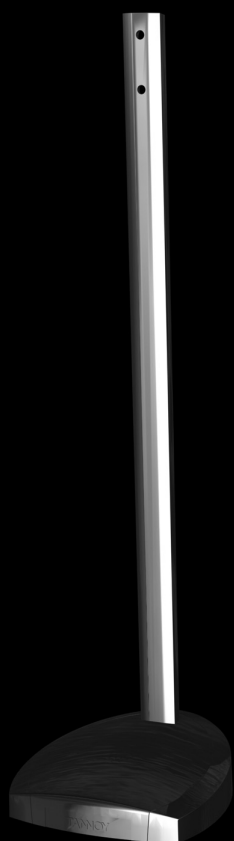

STAND MOUNT

How to stand mount

Attach the spike kits, or rubber feet, to the bottom of the stand then thread the cable through the stand base and shaft.

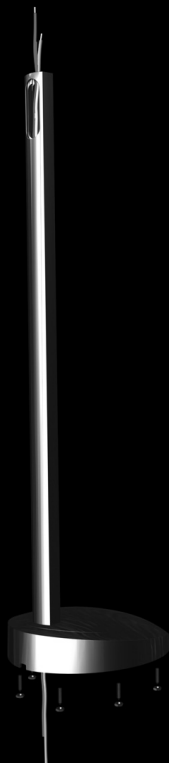

Cut the speaker wire so that the (+) wire is slightly longer than the (-) wire.

Screw the (+) wire into the red terminal and screw (-) wire into black terminal.

Important Note: It is essential that the speakers are wired correctly at this stage. The (-) wire should have a solid black line or similar marked along it.

Offer the speaker up to the stand and use the 2 lock washers and fixing screws to fit the speaker to the stand. Choose two fixing points on rear of speaker which give the best height for your requirements.



CENTRE CHANNEL


What's in the box?

- 1 x Centre speaker
- 1 x Long wall bracket
- 1 x Short bracket with pre-fitted cap
- 1 x Short bracket without pre-fitted cap
- 1 x Bracket cap
- 4 x 8mm Silver hex socket fixing screw + lock washers
- 1 x 5mm Black cap head fixing screw + spring washer
- 1 x Ball nosed allen key
- 1 x Small stand



Required but not included:

- Sufficient cable for your requirements
- Countersunk fixing screws suitable for your wall type
- Screwdriver for above fixing screws
- Spirit level

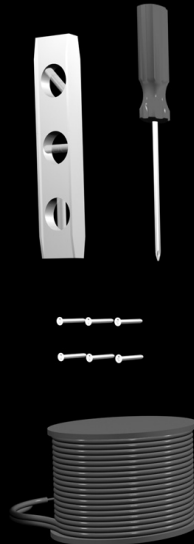

CENTRE CHANNEL


How to wall mount

WARNING: It is your responsibility to ensure that the bracket to wall fixing screws or bolts and the walls themselves are strong enough to support the weight of the speaker - refer to the speaker weight specifications supplied in this manual. Particular care is needed when fixing to hollow or cavity walls - "stud" walls. Use only professionally recommended fixing devices which will spread the load of the brackets and fixing screws over an area of the wall surface when mounting to cavity walls. Pay particular attention to the possibility of electrical cables and gas or water pipes which may be present in the wall cavity or buried in the wall surface. Use a special cable or metal proximity locator to locate these obstacles if in any doubt.

Before wall mounting the centre wall bracket, ensure sufficient clearance to hook the speaker onto the bracket (approx half the speaker length to the left or right of the bracket).

Use a spirit level to ensure the bracket is fitted level.

Mount the bracket on the wall with a suitable fixing (not supplied - see warning note).

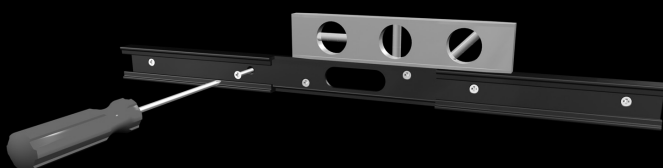

Using the 8mm screws and washers provided attach the two small brackets to the fixing points. Ensure that the bracket with pre fitted cap has the cap facing outwards, on the side you have left clearance for hooking onto the wall .



Thread the speaker wire through the spare cap.

Important note: It is essential that the speakers are wired correctly at this stage. The (-) wire should have a solid black line or similar marked along it.

Screw the (+) wire into the red terminal and screw (-) wire into black terminal.




arena
HIGHLINE 300

CENTRE CHANNEL

How to wall mount - continued

Offer the speaker up to the wall bracket half way along. Engage speaker with bracket and slide across.

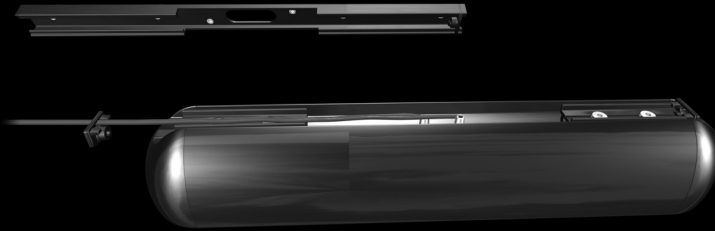

Ensure cap is fully engaged with the wall bracket.




Fix spare cap to bottom of bracket using the cap screw and spring washer provided.



TOWER

What's in the box?

- 1 x Tower speaker
- 6 x Spikes
- 6 x Rubber Feet
- 6 x M6 Nuts

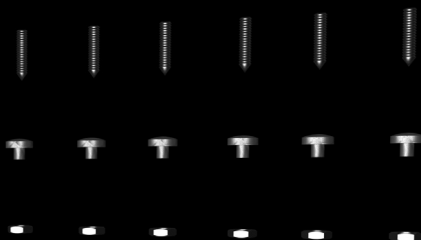

Required but not included:
Sufficient cable for your requirements

TOWER

How to connect

Attach the spike kits or rubber feet to the base of the tower then thread the speaker cable through the base.

Cut the speaker wire so that the (+) wire is slightly longer than the (-).

Screw the (+) wire into the red terminal and screw (-) wire into the black terminal.

Important Note : It is essential that the speakers are wired correctly stage. The (-) wire should have a solid black line marked along it.




ROOM SETUP

A 5.1 surround sound system consists of 5 separate speakers and 1 subwoofer. The centre channel is designed to reproduce most of the dialogue or solo performances. The front left and right speakers reproduce the left/right stereo information and special effects. The rear left and right speakers reproduce special effects.

Try to get all 3 front speakers equidistant from the listening position and in the same plane, for example along a back wall which may be present just behind the viewing screen or TV cabinet.

The front centre speaker should be mounted either above or below the screen. It may be mounted behind a projector screen only if the screen is acoustically transparent.

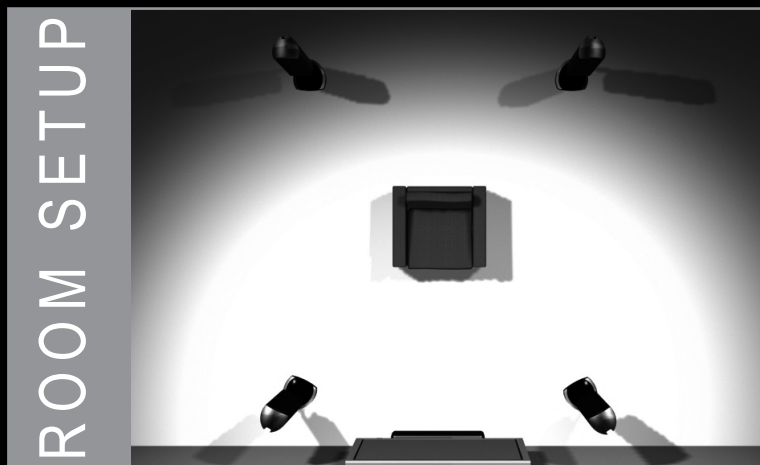


CONNECTING THE SYSTEM TO YOUR AV RECEIVER

Wire up the system connecting each speaker to the appropriate terminals on the receiver or amplifier making sure that cables connect red to red terminals (+ to +) and black to black terminals (- to -).

Please note : (+) is shown as grey, (-) is shown as white.

Take care to distinguish between left and right channels and the front and rear channels, as seen from the viewing position.

This is a very important stage in setting up. Getting things wrong at this stage is the most likely reason for disappointing results.

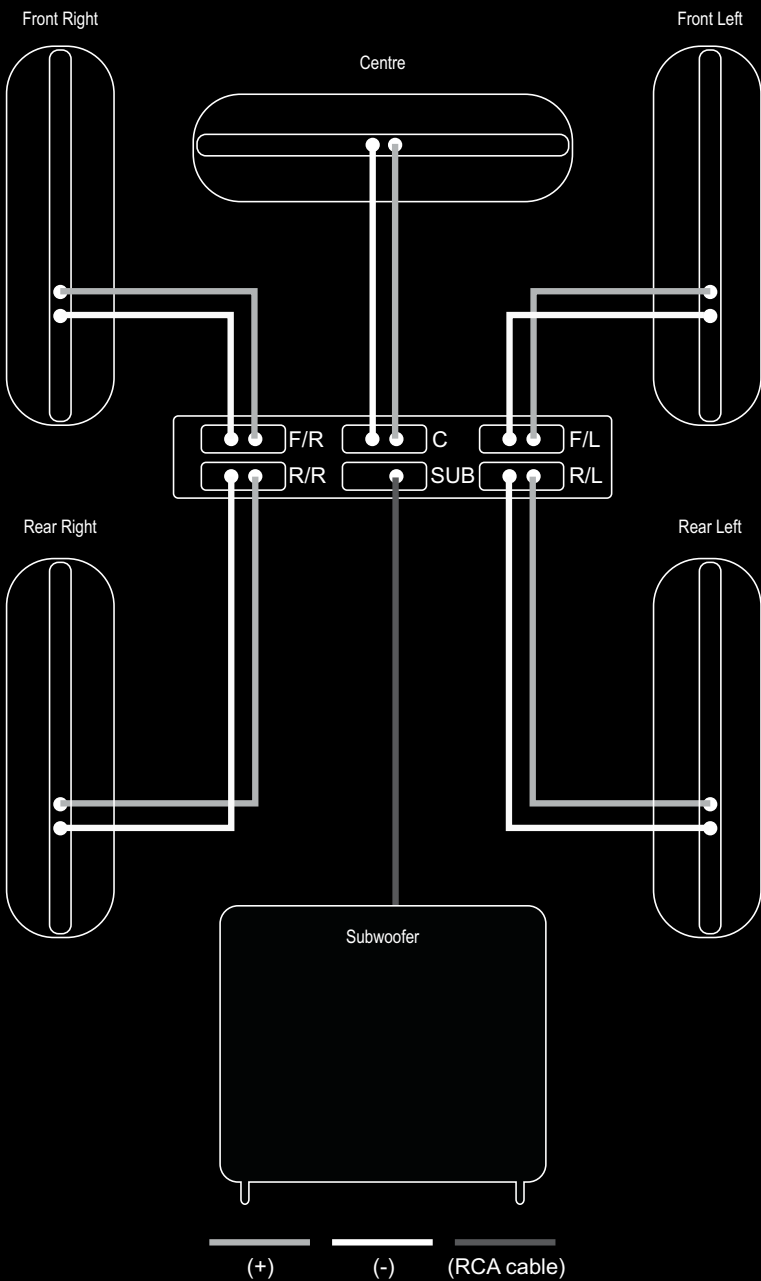


TECHNICAL SPECIFICATIONS

ARENA HIGHLINE 300, CENTRE & SATELLITE SPEAKER PERFORMANCE:

Recommended amplifier power	25 - 75W RMS
Maximum sensitivity (2.83V @ 1m)	87dB
Nominal impedance	8 Ohm
Frequency response (-6dB)	95Hz - 62kHz
Drivers	4 x 75mm (3") LF/MF with 19mm (0.75") HF
Crossover frequency	300Hz, 6.0kHz
Magnetic shielding	Yes
Satellite weight	5 kg (11.1 lbs)
Satellite dimensions H x W x D	590 x 109 x 101 mm (23.23 x 4.29 x 3.98 ins)
Centre weight	5 kg (11.1 lbs)
Centre dimensions H x W x D	109 x 590 x 101 mm (4.29 x 23.23 x 3.98 ins)
Finish	Black gloss or silver gloss
Supplied accessories	Aluminium wall bracket system for each centre and each satellite Additional small stand for each centre channel
Optional accessories	Floor stand for satellite speakers

ARENA HIGHLINE 300 CENTRE

INCLUDING
WALL BRACKET

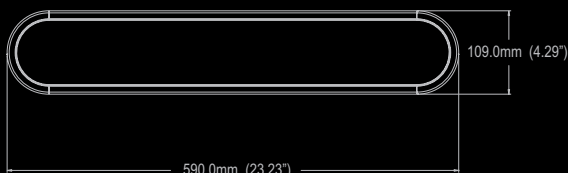

ARENA HIGHLINE 300 SATELLITE




arena
HIGHLINE 300

TECHNICAL SPECIFICATIONS

ARENA HIGHLINE 300 SATELLITE ACCESSORY STAND

Weight	5.9kg (13lbs)
Dimensions H x W x D	759.50 x 173.0 x 175.0 mm (29.90 x 6.81 x 6.89 ins)
Finish	Black gloss or silver gloss

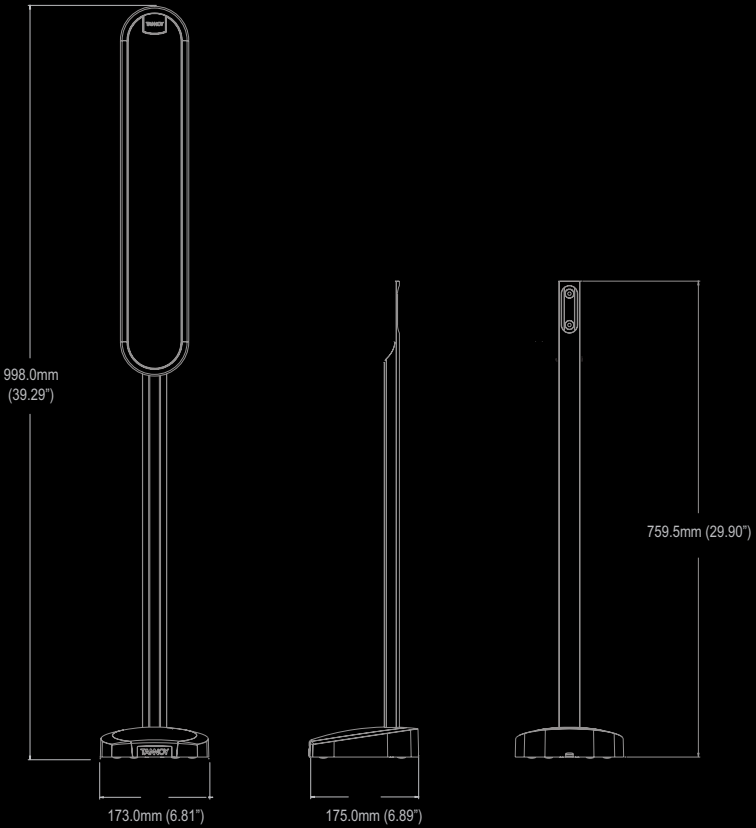


arena
HIGHLINE 300

TECHNICAL SPECIFICATIONS

ARENA HIGHLINE 300, TOWER SPEAKER PERFORMANCE:

Recommended amplifier power	25 - 75W RMS
Maximum sensitivity (2.83V @ 1m)	87dB
Nominal impedance	8 Ohms
Frequency response (-6dB)	80Hz- 62kHz
Drivers	4 x 75mm (3") LF/MF with 19mm (0.75") HF
Crossover frequency	300Hz, 6.0kHz
Magnetic shielding	Yes
Weight	10 kg (22.3 lbs)
Dimensions H x W x D	1055 x 173 x 175 mm (41.53 x 6.81 x 6.89 ins)
Finish	Black gloss or silver gloss
Supplied accessories	Support mountings suitable for carpet or polished floors

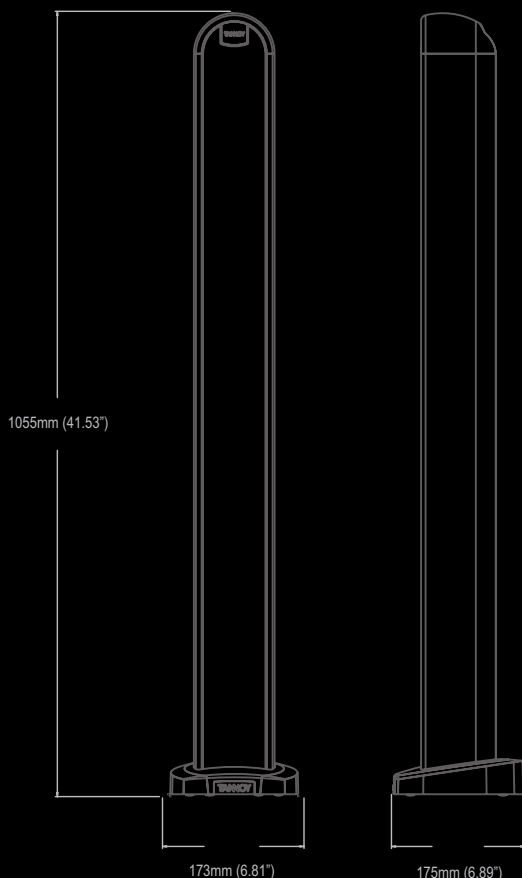

arena
HIGHLINE 300



TANNOY®

arena
HIGHLINE 300

Check periodically for the latest manual revision that will always be available for download from www.tannoy.com. The issue number of this manual is located below.

Part No. 6481 0482 / MAR 06

Tannoy United Kingdom
Tannoy North America
Tannoy Deutschland

T: +44 (0) 1236 420199
T: (519) 745 1158
T: +44 (0) 2246 900926

F: +44 (0) 1236 428230
F: (519) 745 2364
F: +44 (0) 2246 911259

E: enquiries@tannoy.com
E: inquiries@tannoyna.com
E: info@tannoy.com

tannoy.com