

Litepanels MicroPro™

The professional LED light that runs off 6 standard AA batteries. MicroPro™ daylight on-camera lighting fixtures harness the company's proprietary LED technology in a lightweight, compact design. With twice the illumination of the Litepanels Micro, the MicroPro offers luminous, soft, directional lighting with the same warmth and great color characteristics that make Litepanels an integral part of television, broadcast news and motion picture productions worldwide.

Shift free, Flicker free, Heat free

At the top of the MicroPro housing is a convenient integrated dimmer dial that puts instant 100% to 0 dimming with minimal color shift right at the operator's fingertips. Output is flicker free and heat free and remains consistent. For more versatility, an integrated filter holder allows for work with the three included color/diffusion gels.

Power Saver

Litepanels MicroPro produces 1.5 hours of continuous output from 6 AA batteries or 5-6 hours from Energizer e2 Lithium cells. It generates almost no heat, so it's remarkably easy to handle. And the system can be run off of either standard or rechargeable batteries. Power can be supplied optionally through a convenient 5-16V input jack located on the back of the unit. In addition there is an optional DV Adapter Plate for Panasonic, Canon and Sony batteries.

ENG/DV/DSLR-Friendly Design

The compact, low-profile Litepanels MicroPro head is ideally suited for mounting on an ENG, DV, or DSLR camera. Measuring just 5.5" W x 3.75" H x 1.5" D (139.7mm x 95.25mm x 38.1mm), the head weighs just 10.5 ounces (300g). With a handsome black finish and sleek design, it is a professional-looking addition to any camera.

Variety of Mounting Options


Litepanels MicroPro comes equipped with a Ball Head Shoe Mount with 1/4-20 thread featuring an adjustable tilt mechanism and locking handle. To allow for multiple configurations, it may also be mounted on the optional base plate for off-camera usage, or on an extension arm.

Specifications

Size: 5.5" W x 3.75" H x 1.5" D
(139.7mm x 95.25mm x 38.1mm) without shoe
Weight: 10.5 oz (300g)
Power Draw: 9 Watts
6 AA batteries (internal)
Integrated Filter Holder
5600°K Daylight Output (cool white)
Filters Included: 3200°K Tungsten conversion (warm white), 1/4 warming and diffusion
Equivalent Wattage: Approximately 50W



Without Litepanels MicroPro

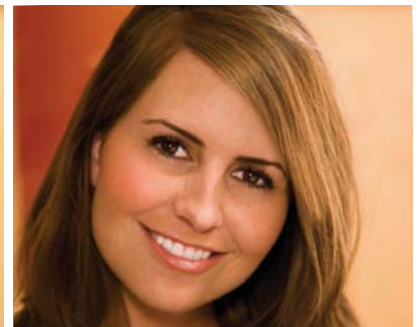

With Litepanels MicroPro

Lightweight & powerful—
Double the output of the Micro



Advantages

- Heat free LED technology
- Produces bright, HD-friendly soft light
- Integrated dimmer 100% to 0
- All in one with no external cables
- Absolutely flicker free light output
- Runs 1.5 hrs. on 6 AA HD Alkaline batteries, or 5-6 hours on Energizer e2 Lithium cells
- Uses standard or rechargeable batteries
- Lightweight and compact
- 50,000+ hours of LED life

Options

- Spare color/diffusion gels
 - Base plate for off-camera usage
 - Articulated camera extension arm
 - AC Power Adapter with international plug set
 - Underwater Housing
 - DV Adapter Plate for Panasonic, Canon and Sony batteries
- Note: Handycam Shoe Adapter available at video resellers.

For underwater usage, check out the SeaSun® on page 13.

The new MicroPro Bag is especially designed to transport Litepanels MicroPro LED light system easily and safely.

MICROPRO PHOTOMETRICS 5600°K

Distance	Footcandles	LUX
2 ft. / 0.6M	100 FC	1100 LUX
4 ft. / 1.2M	52 FC	560 LUX
6 ft. / 1.8M	28 FC	300 LUX