



# DDS Series Satellite Dimmer Packs

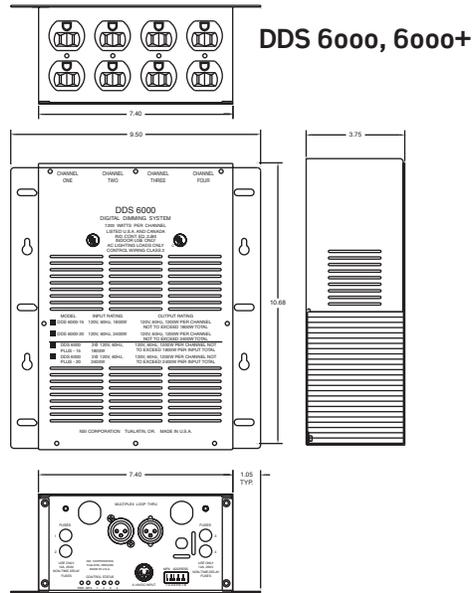

DDS satellite dimmers are fully UL listed digital products that provide reliable, responsive performance with smooth, accurate dimming curves. Extensive epoxy encased toroidal filtering reduces the potential of dimmer generated noise. Individual channels are user assignable as dimmers or on/off relays for non-dim applications. All DDS Dimmers have built-in chase effects for stand-alone operation, perfect for all display type applications.

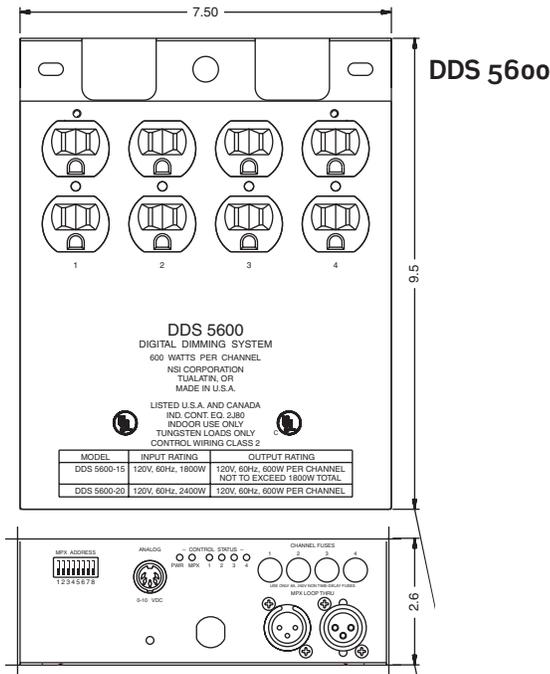

DIMENSIONAL DATA - IN. [CM] LBS. [KG]			
	5600	6000	6000+
Width	7.5 [19.1]	9.5 [24.1]	9.5 [24.1]
Depth	2.6 [6.6]	3.75 [9.5]	3.75 [9.5]
Height	9.5 [24.1]	10.9 [27.7]	10.9 [27.7]
Shipping Weight	10 [4.54]	14 [6.3]	15 [6.8]
Mounting Holes (OC)	8.25 [21]	8.25 [21]	

## FEATURES

- 4 individual dimmer or relay channels
- Microprocessor digital phase control dimming or zero-crossing relay modes are user selectable (3600R is relay only)
- 512 channel address capable
- User select for soft start operation to increase lamp life
- User select for 8 auto sequence control programs
- Sequence rate adjustable from 1 to 60 seconds
- Toroidal noise filtering
- Dual SCR circuit design ensures reliable operation
- Control status indicator LED
- Power on LED indicator
- Individual channel function LEDs
- External fusing for each individual channel
- External front panel circuit breaker (6000 and 6000+ only)
- NSI 128 channel Micro-Plex (3-pin XLR male and female)
- 0 to 10 volt analog input (5-pin DIN)
- Optional DMX512 digital control (5-pin XLR male and female)

## PRODUCT DATA



### DDS 5600

- 4 channels @ 600 watts
- 15 amp/1800 watt model with NEMA 5-15 household power cord connector or 20 amp/2400 watt model with NEMA 5-20 perpendicular blade power cord connector available
- 2400 watts maximum output
- 160 micro-second toroidal filtering

- 2400 watts maximum output
- 400 micro-second toroidal filtering
- UL listed knockout version available for hardwired permanent installation

### DDS 6000

- 4 channels @ 1200 watts
- 15 amp/1800 watt model with NEMA 5-15 household power cord connector or 20 amp/2400 watt model with NEMA 5-20 perpendicular blade power cord connector available

### DDS 6000+ (DUAL POWER CORDS)

- 4 channels @ 1200 watts
- 15 amp/3600 watt model with NEMA 5-15 household power cord connector or 20 amp/4800 watt model with NEMA 5-20 perpendicular blade power cord connector available
- 4800 watts maximum output
- 400 micro-second toroidal filtering
- UL listed knockout version available for hardwired permanent installation

DDS Series Satellite Dimmer Packs

CAT. NO.	DESCRIPTION
N5600-000	DDS 5600 4 Channel, 600 Watt / Channel Dimmer/Relay System, Micro-Plex And 0-10V Analog standard, 15 Amp Power Supply Cord, 120V, UL/C-UL Listed
N5600-D00	DDS 5600, 120V W/DMX - 4 Channel, 600 Watt / Channel Dimmer/Relay System, DMX installed, 15 Amp Power Supply Cord, 120V, UL/C-UL Listed
N5600-020	DDS 5600, 120V - 4 Channel, 600 Watt / Channel, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 20 Amp Power Supply Cord, 120V, UL/C-UL Listed
N5600-D20	DDS 5600, 120V W/DMX - 4 Channel, 600 Watt / Channel, Dimmer/Relay System, DMX installed, 20 Amp Power Supply Cord, 120V, UL/C-UL Listed
N5600-009	DDS 5600 4 Channel, 600 Watt / Channel, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 15 Amp Power Supply Cord, 240V
N5600-D09	DDS 5600, 240V W/DMX - 4 Channel, 600 Watt / Channel, Dimmer/Relay System, DMX installed, 15 Amp Power Supply Cord, 240V
N6000-000	DDS 6000 4 Channel, 1200 Watt /Channel 1800 Watt Max, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 15 Amp Power Supply Cord, 120V, UL/C-UL Listed
N6000-D00	DDS 6000 W/DMX - 4 Channel, 1200 Watt /Channel 1800 Watt Max, Dimmer/Relay System, DMX installed, 15 Amp Power Supply Cord, 120V, UL/C-UL Listed
N6000-020	DDS 6000, 120V - 4 Channel, 1200 Watt /Channel 2400 Watt Max, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 20 Amp Power Supply Cord, 120V, UL/C-UL Listed
N6000-D20	DDS 6000 W/DMX - 4 Channel, 1200 Watt /Channel 2400 Watt Max, Dimmer/Relay System, DMX installed, 20 Amp Power Supply Cord, 120V, UL/C-UL Listed
N6000-009	DDS 6000 4 Channel, 1200 Watt /Channel 2400 Watt Max, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 15 Amp Power Supply Cord, 120V
N6000-D09	DDS 6000 W/DMX, 240V - 4 Channel, 1200 Watt / Channel 2400 Watt Max, Dimmer/Relay System, DMX installed, 15 Amp Power Supply Cord, 240V
N600P-000	DDS 6000 4 Channel, 1200 Watt / Channel 3600 Watt Max with Dual 15A Power Supply Cords, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 120V, UL/C-UL Listed
N600P-D00	DDS 6000+, 120V W/DMX - 4 Channel, 1200 Watt / Channel 3600 Watt Max with Dual 15A Power Supply Cords, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 120V, UL/C-UL Listed
N600P-020	DDS 6000+, 120V - 4 Channel, 1200 Watt / Channel 4800 Watt Max with Dual 20A Power Supply Cords, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 120V, UL/C-UL Listed
N600P-02K	DDS 6000+ KO - 4 Channel, 1200 Watt / Channel 4800 Watt Max, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, Knockout, 120V, UL/C-UL Listed
N600P-D20	DDS 6000+ W/DMX - 4 Channel, 1200 Watt / Channel 4800 Watt Max with Dual 20A power supply cords, Dimmer/Relay System, DMX installed, 120V, UL/C-UL Listed
N600P-D2K	DDS 6000+ KO w/DMX - 4 Channel, 1200 Watt / Channel 4800 Watt Max, Dimmer/Relay System, DMX installed, Knockout, 120V, UL/C-UL Listed
N600P-009	DDS 6000 4 Channel, 1200 Watt / Channel 3600 Watt Max with Dual 15A Power Supply Cords, Dimmer/Relay System, Micro-Plex and 0-10V Analog standard, 240V
N600P-0K9	DDS 6000+ KO, 240V - 4 Channel, 1200 Watt / Channel 4800 Watt Max . Dimmer/Relay System, Micro-Plex And 0-10V Analog Is Standard, Knockout, 240V
N600P-D09	DDS 6000+, 4 x 1200W, 2400W Max, 240V w/ DMX
N600P-DK9	DDS 6000+, 4 x 1200W, 2400W Max, 240V w/ DMX & Knockouts

### LEVITON SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

### Leviton Manufacturing Co., Inc. Lighting Management Systems

20497 SW Teton Avenue, Portland, OR 97062

Telephone: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Monday-Friday): 1-800-959-6004

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: [www.leviton.com/lms](http://www.leviton.com/lms)

© 2008 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

G-7946/B8-ak