

Model: D8P-ID-3

Decora 8-hole Panel with Pocket-ID® (3U)



Description:

The D8P-ID-3 is a 19" (3U) steel rackmount panel with eight punched openings to hold up to eight (1-gang) Decora® style devices, and a PocketID™ label area. The panel uses minimal rack space while providing an organized solution for mounting and identifying low-voltage devices in the front of the rack. It includes a rear lacing flange for wire management, hardware, and a mounted polycarbonate overlay with clear Pocket-ID™ area for labels. Smooth, semi-gloss, black epoxy finish. Order device controls and filler plates separately.

Features:

- Composition: 16-gauge US steel
- Size: 19"W x 5.25"H (3U)
- Style: flanged
- Finish: smooth, semi-gloss, black powder epoxy
- PocketID™: The PocketID window accepts a 0.5"H strip of paper for device identification. Labels can be handwritten or computer-generated and printed on 8.5"x 11" paper. **Template "PocketID-A"** (Microsoft Word® format) is available online at www.lowellmfg.com.
- Made in the USA


A & E Specifications:

Low voltage accessory devices (ordered separately) shall be mounted into Lowell rackmount panel Model D8P-ID-3. Panel shall be 19"W x 5.25"H. Panel shall be formed steel construction with eight punched cutouts and a black epoxy finish. It shall include hardware, a rear lacing flange for wire management, and an overlay with window for inserting a 0.5"H paper strip for label. (Optional cover plates model DBB-4 shall be used to cover unused cutout positions.)

Options: (order separately)

- **DBB-4:** Blank Decora-style filler plate for unused positions. Set of four. Black finish.
- **Decora Device Suggestions:** The D8P-ID-3 will accept up to eight 1-gang Decora-style devices. Some devices include a wall plate that must be removed before mounting device to panel. Devices listed have a black finish. *Note: Device model 200LVC-RMDB is a wide-body device that will fit into this panel, provided a blank space is left on either side (max. 4 per panel).*
 - **25LVC-DB:** 25W mono volume control, 3-dB step
 - **50LVC-DB:** 50W mono volume control, 3-dB step
 - **100LVC-DB:** 100W mono volume control, 3-dB step
 - **10015LVC-DB:** 100W mono volume control, 1.5-dB step
 - **100LVC-PA-DB:** 100W mono volume control with priority relay, 3-dB step
 - **50LVCS-DB:** 50W 8ohm stereo volume control, 3-dB step
 - **KL100-DB:** 100W volume control with key lock, 3-dB step
 - **KL100-PA-DB:** 100W volume control with key lock, priority relay, 3-dB step
 - **200LVC-RMDB:** 200W rackmount volume control, 3-dB step*
 - **RPSB-P:** maintained closure remote (rocker) switch, 1 LED
 - **RPSB-KP:** maintained closure remote (key) switch, 1 LED
 - **RPSB-KP-ASM:** maintained closure remote (key) switch, 1 LED (for use with sequencers with ASM mode option)
 - **RPSB-MP:** momentary closure remote (rocker) switch, 1 LED
 - **RPSB-MKP:** momentary closure remote (key) switch, 1 LED
 - **RPSB2-MP:** momentary closure remote (rocker) switch, 2 LEDs
 - **RPSB2-MKP:** momentary closure remote (key) switch, 2 LEDs

D8P-ID-3

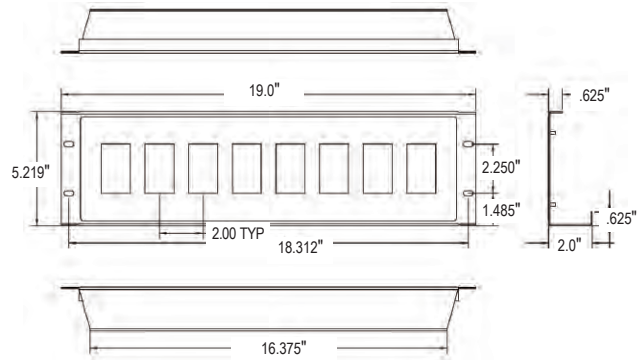

DBB blank filler plate

Model No.	Description	Former No.	Panel Space (inches)	Rack Units	Carton Pack
D8P-ID-3	Decora 8-hole Panel with Pocket-ID	LD8-RMP	5.25	3	1
DBB4	Decora Black Blank (position filler plate)	---	---	---	4

One rack unit = 1.75"

Spec. No. **1065**
(rev. 01.18.11)
pg. 1 of 1

©2011 Lowell Manufacturing Company, 100 Ingram Dr., Pacific MO 63069. Phone-800.325.9660 Fax-636.257.6606. Lowell makes every effort to provide accurate information while reserving the right to change specifications and/or improve manufacturing methods without notification. (lowellmfg.com)

