Rack Front Door (solid steel, fully-vented steel, or smoked Plexiglas)

Description:

LFD front doors (solid steel, fuly-vented or smoked Plexiglas) with recessed handles are engineered to work with Lowell 19"W equipment racks in rack series listed. The surface-mount doors feature 180° swing and can be changed from right to left orientation by moving two hinges (factory-installed hinge nutserts on matching Lowell racks help quick changeover). Door extends 1" from rack frame on outside, providing .75" of space from frame on inside to accommodate equipment knobs. See individual rack specs for more information.

Features:

Model No.

- Surface-mount door (20"W x 1"D) is made in USA with left or right swing (field changeable); swings open 180°
- Two hinges install with 10-32 x 1" socket-head machine screws.
 Black plugs cover screws for a finished appearance.

A&E Specifications:

Description

The rack surface-mount front door with key-lock shall be Lowell Model _____ and shall be (solid, fully-vented or steel with smoked Plexiglas insert). It shall extend 1" from frame and swing open 180°.





Lowell LFD-series front doors for 19"W racks in solid, fully-vented, or smoked Plexiglas. LFD doors work with rack series listed below.

LFD-7	7U solid door with lock	L2150-12
LFD-7FV	7U full-vent door with lock	L2150-12PF
LFD-7P	7U Pleixglas door with lock	L2150-12P
LFD-10	10U solid door with lock	L2150-17
LFD-10FV	10U full-vent door with lock	L2150-17PF
LFD-10P	10U Plexiglas door with lock	L2150-17P
LFD-12	12U solid door with lock	L2150-21
LFD-12FV	12U full-vent door with lock	L2150-21PF
LFD-12P	12U Plexiglas door with lock	L2150-21P
LFD-14	14U solid door with lock	L2150-24
LFD-14FV	14U full-vent door with lock	L2150-24PF
LFD-14P	14U Plexiglas door with lock	L2150-24P
LFD-16	16U solid door with lock	L2150-28
LFD-16FV	16U full-vent door with lock	L2150-28PF
LFD-16P	16U Plexiglas door with lock	L2150-28P
LFD-18	18U solid door with lock	
LFD-18FV	18U full-vent door with lock	
LFD-18P	18U Plexiglas door with lock	
LFD-21	21U solid door with lock	L2150-36
LFD-21FV	21U full-vent door with lock	L2150-36PF
LFD-21P	21U Plexiglas door with lock	L2150-36P
LFD-24	24U solid door with lock	L2150-42
LFD-24FV	24U full-vent door with lock	L2150-42PF
LFD-24P	24U Plexiglas door with lock	L2150-42P
LFD-35	35U solid door with lock	L2150-61
LFD-35FV	35U full-vent door with lock	L2150-61PF
LFD-35P	35U Plexiglas door with lock	L2150-61P
LFD-40	40U solid door with lock	L2150-70
LFD-40FV	40U full-vent door with lock	L2150-70PF
LFD-40P	40U Plexiglas door with lock	L2150-70P
LFD-44	44U solid door with lock	L2150-77
LFD-44FV	44U full-vent door with lock	L2150-77PF

For rack series:

LBR
LDRF
LER
LERF
LGR
LPR
LPPR
LSER
LSERF
LSERF
LWBR
LWBR
LWRF
LWSRF



LFD-44P

LK-FD


44U Plexiglas door with lock

(2) extra keys for front door lock

L2150-77P

Former No.

Changing from right to left swing: Doors mount right (factory shipped) or left (with hinges relocated) to premounted nutserts on each side of the rack frame. This method eliminates drilling and allows doors to be installed after equipment is loaded.

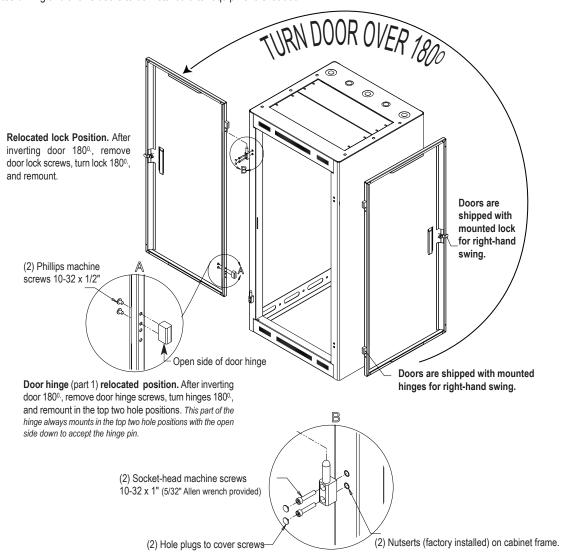

Door hinge pin (part 2) **mounts to cabinet without drilling.** The second part of the door hinge (pin) is always field installed to factory mounted nutserts. Nutserts are located on the front left and right of cabinet.

