

Screw-mount Grilles (for 8" speaker)

Description:

Lowell grille Models WB-8 and WB-8H are the industry standard when it comes to steel ceiling grilles for 8" speakers. Their clean, contoured edge appearance and economical cost makes them popular for installation in offices, hotels, schools, medical, retail, and commercial facilities all over the world. Grilles are precision formed from a single piece of 20-gauge steel with a perforated center and beveled edge for attractive ceiling installation. Model WB-8 features four 8-32 x 1" welded studs with palnuts for concealed loudspeaker mounting. Model WB-8H features four 8-32 Phillips-head screws for loudspeaker installation. Both are equipped with four white 8-32 x 1-1/2" Phillips-head screws to attach the speaker-grille assembly to the backbox or mounting ring (order separately). Grilles are finished in white powder epoxy for long lasting quality appearance.



Features:

- 20-gauge steel reinforced with a peripheral flange of 60-degrees
- 12.875" diameter
- White powder epoxy finish
- **Model WB-8:** welded studs for mounting 8" speaker (4 screws, 4 studs). This grille is also suitable for use with Lowell Unihorn model LUH-15T.*
- **Model WB-8H:** four 0.218" holes spaced at 90-degree intervals for screw mounting 8" speaker. (8 screws)

A & E Specifications

The grille for 8" speakers shall be Lowell Model _____. It shall be fabricated one-piece 20-gauge steel reinforced with a peripheral flange of 60-degrees. The grille diameter shall be 12.875" with a shallow mounting projection of 0.25". Each grille shall also have four 0.25" holes spaced at 90-degree intervals on a 11.25" bolt circle for mounting specified backbox or mounting ring. Models shall be finished in white powder epoxy and include white screws for backbox mounting.

(Model WB-8H grille shall have four 0.218" holes spaced at 90-degree intervals for screw mounting the specified 8" speaker. Model WB-8 shall include welded studs for mounting specified 8" speaker.)

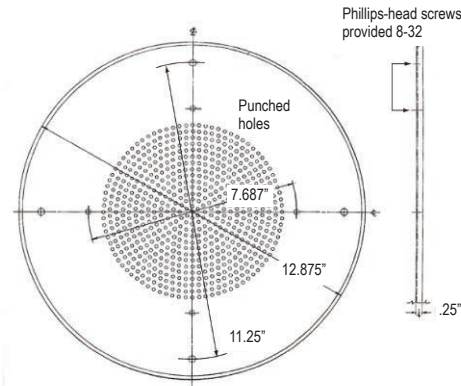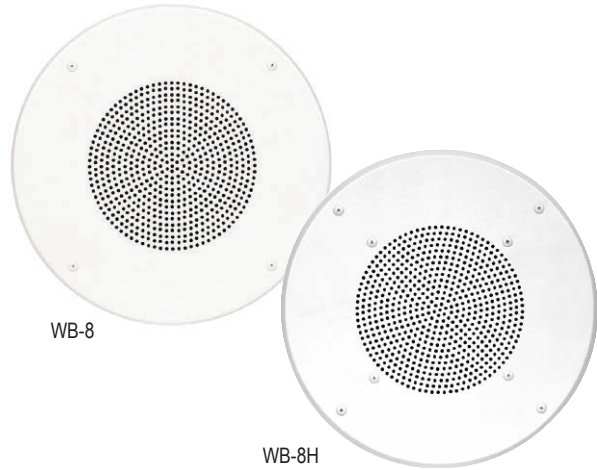

Compatible Components: (order separately)	
Speaker (8"):	805, 810, 8C10MRA, CT830, 8A50
Horn (8"):	LUH15T
Backbox:	CP84, CP87, CP810, DX58, DX108, XCP84, XCP87, XCP810, 8XD4, 8PSBX, RF841, RF871
T-bridge:	LBS8, LBS8R1, LBS8CP
Support Rails:	SS24, SS30, SS48

Accessory Selection Chart (order separately):

Grille No.	Dia. (in)	For Speaker Size (in)	Backbox or Mounting Ring No. **	T-bridge or Rails (for suspended tile ceilings)
WB-8	12.875	8	CP84, CP87, CP810, DX58, DX108	LBS8CP or SS rails
			XCP84, XCP87, XCP810, 8XD4, 8PSBX	LBS8 or LBS8R1
			RF841, RF871	n/a
			No backbox	LBS8 or LBS8R1
			Mounting ring (instead of backbox) PR81624, RMP8	n/a
WB-8H	12.875	8	CP84, CP87, CP810, DX58, DX108	LBS8-CP or SS rails
			XCP84, XCP87, XCP810, 8XD4, 8PSBX	LBS8 or LBS8R1
			RF841, RF871	n/a
			No backbox	LBS8 or LBS8R1
			Mounting ring (instead of backbox) PR81624, RMP8	n/a

* If grille is used with Unihorn model LUH-15T, use backbox CP84 (with LBS8CP or SS rails) or XCP84 (with LBS8R1 or SS rails). For no backbox, use T-bridge LBS8R1 (if needed).

** Stackable backbox Models 8PSBX and 8XD4 have a conical shape that will not accept a speaker with a large transformer such as TLM870.