
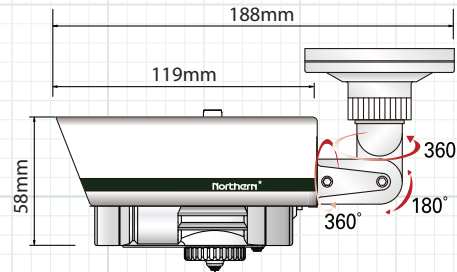


## 600 Line Outdoor Bullet Camera

D/N, OSD, WDR, DNR, 2.8-12mm LENS — 80' IR Range



Dimensions

SPECIFICATION	C600BCDNVFIR
Image Sensor	1/3" Color Sony Super HAD II CCD
Effective Picture Elements	768(H) x 494(V)
Resolution	600 Horizontal TV Lines
OSD (On-screen Display)	Yes (Built-in)
D-WDR (Wide Dynamic Range)	Yes (Built-in)
DNR (Digital Noise Reduction)	2D-DNR (1~50 Level Adjustable)
Video Output	1.0Vp-p (Sync, Negative) Termination 75 OHM
Minimum Illumination	0.01Lux / IR LED ON: 0.0Lux
LED	IR LED 14pcs 840nm
LED Range	80'
S/N Ratio	52dB (AGC Off, Weight On)
Electronic Shutter	Auto (1/60 ~ 1/100,000 sec.)
Gain Control	High, Middle, Low, Off (Selectable)
Sync System	2:1 Interlaced, Internal / Line Lock (in 24 VAC)
Gamma	$\gamma = 0.45$ Typ.
Back Light Compensation	OFF / HSBLF / BLC Selectable
Day / Night	Color / BW / Auto / EXT
Mirror	Off / Mirror / V-Rev / Rotate
Test Illuminance Area	Average Test Illuminance by Front View
White Balance	ATW / AWB / Manual / AWC >SET
Power Requirement	Dual Power (24 VAC / 12 VDC)
Power Consumption	12 Volts DC: IR OFF (200mA), IR ON (550mA) 24 Volts AC: IR OFF (100mA), IR ON (300mA)
Reverse Polarity Protection	Yes
Operation Temperature	-14°F ~ 122°F
Lens Type	2.8-12mm Auto Iris
Overall Camera Dimensions	2.6" x 3.5" x 7.4"
Weight	1.8lb
Weatherproof Rating	IP66

### FEATURES

- ◆ 600 Line High Resolution Performance
- ◆ Digital Wide Dynamic Range
- ◆ OSD Control of All Major Functions
- ◆ Digital Noise Reduction
- ◆ 2.8-12mm Auto Iris Lens
- ◆ 14 IR LED's
- ◆ 80' IR Range
- ◆ Wall or Ceiling Mountable
- ◆ Cable Management Mount
- ◆ Mounting Plate for Easy Installation
- ◆ Dual Voltage Power 12VDC/24VAC
- ◆ IP66 Weatherproof Rating

### INCLUDED / ACCESSORIES

1. User Manual
1. Mounting Hardware Packet
1. Base Adapter Plate
1. L-Wrench 3.0mm
1. Video Test Cable

Note: Specification subject to change without notice