

VS-574 / VS-574-HDSDI

1.3MP 28x Zoom IP PTZ Camera



Shown
with Optional
Wall Mount Bracket
VS-B570-W


- 1.3 Megapixel 1/4" CMOS Image Sensor
- 30fps @ 1280 x 720
- 240x zoom control (20x optical, 12x digital)
- Supports BLC (Backlight compensation) & WDR (Wide Dynamic Range)
- Supports ASER (Auto Slow Exposure Response)
- True day & night (ICR)
- Adjustable video bitrate: 32kbps ~ 10mbps
- Support SD card, FTP recording
- Two way audio communication (G.711/AAC)
- PoE (Power over Ethernet): 802.3at
- f=3.5mm ~ 98mm, F1.635~ F3.7
- Composite / HD-SDI video output (on VS-574-HDSDI Only)
- Fast & smooth motion with 360° pan rotation
- Maximum 128 presets, 8 swings, 4 patterns, 8 groups function
- Privacy mask function
- Vandal-proof, IP67-rated protection
- ONVIF, PSIA compliant




VS-574 Price: \$ 3,799.00

VS-574-HDSDI Price: \$ 5,599.00


VS-574 / VS-574-HDSDI Dimentions

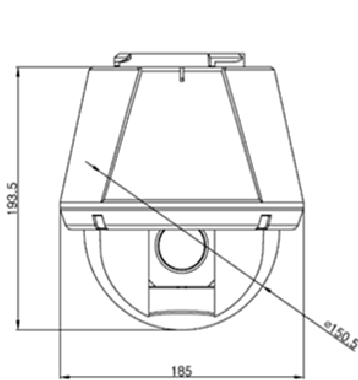

Main Body

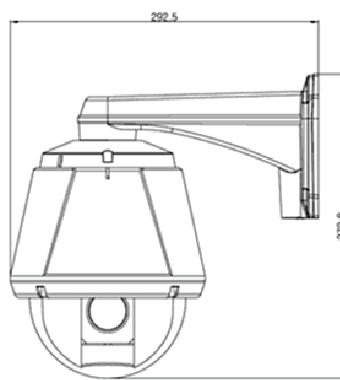

Wall Mount Bracket

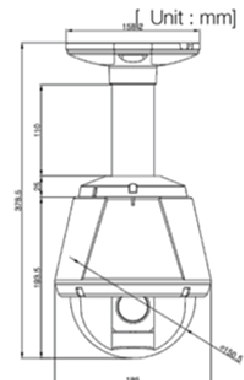

Ceiling Mount Bracket

VS-574 and VS-574-HDSI specifications

Camera	Image sensor	1/4" Progressive Scan CMOS
	Synchronization	Internal
	Horizontal resolution	900TV line
	Minimum Illumination	1.0 Lux (color), 0.25 Lux (B/W, ICR On) with 50IRE
	S/N ratio	50 dB
	Electronic shutter speed	DSS Auto / Off
	Sense-up/DSS (Digital slow Shutter)	1/1 ~ 1/10,000 sec
Image Enhancement	Automatic gain control	Auto
	AE control	Full Auto, Manual, Shutter priority, Iris priority, Bright, Spot light
	White balance mode	AWB, Manual, Outdoor, Indoor
	True day & night (TDN)	Auto, Day, Night, Threshold (Night to Day)
	Backlight compensation	BLC
	WDR (Wide Dynamic Range)	Supports
	Digital noise reduction (filter)	Supports
	De-Mist	Supports
	On-screen display	English
	Motion detection	Supports
	Flip mode	Horizontal, Vertical
Lens	Lens type	28x optical zoom, Auto DC
	Digital zoom	x12 Digital Zoom
	Focal length	f=3.5mm ~ 98mm
	Maximum aperture ratio	Maximum aperture ratio F1.6 ~ F3.5,
	Angle of view	Horizontal: 55.4(wide) ~ 2.9(tele)
Video	Video compression	H.264 HP level 4
	Frame rate	30fps
	Bitrate	Pri: 32Kbps ~ 10Mbps / Sec: 32Kbps ~ 1Mbps
	Resolutions (Max)	1280 x 720
	Video streaming	Primary: H.264 / Secondary: H.264, MJPEG
	Video output	VS-574 - Composite / VS-574-HDSI - HD-SDI
	Backup	SD card, FTP
Audio	Audio compression	G.711 , AAC
	Audio sampling rate	G.711: 8KHz, AAC: 32KHz
	Audio input/output	1 x line-out (mini-stereo, single mono)
PTZ control	Panning range	360°
	Tilting range	180°
	Preset Speed	360°/sec
	Manual Speed	0.05° ~ 360°/sec (zoom proportion not available)
	Swing Speed	1.4°~180° /sec
	Preset positions	128 Presets
	Pattern	4 (approximate 5 minutes for each pattern)
Network	Network interface	Ethernet 10/100base-T (RJ-45)
	Network protocol	TCP/IP, UDP, Multicast, DHCP, SMTP, HTTP, HTTPS, SNMP, RTP, RTSP, UPnP, WS-Discovery, Zero Configuration, DDNS
General	Ingress protection rating	IP 67
	Certifications	CE, FCC, ROHS
	Power supply	DC 12V/1.8A, PoE (Power over Ethernet): 802.3at
	Operating temperature	+12VDC: -10°C ~ 50°C (12°F ~ 122°F)
	Dimension	Dome: Ø148 mm/ Ø 5.8"
	Weight	6,200g / 13.67lb

Features, specifications, pricing, and dimensions are subject to change without notice.

Physical appearance of products may vary slightly from images shown on this document. Please visit our website for updates and information.