

CROMO+ *Series*

CROMO 8+
CROMO 10+
CROMO 12Club
CROMO 12+
CROMO 15+

2-Way Active Speakers



dBTechnologies

2-Way Active Speakers


The Cromo+ Series offers powered loudspeakers with modern digital technology for first time users, without having to miss out on professional features and outstanding audio performance.

The Cromo+ Series features the ultra compact digipack digital power amplifiers, based on the successful digipro® amp technology for maximum efficiency.

The integrated digital sound processor (DSP) caters for perfect sound calibration of the individual speaker components. All in all, true professional features, unique in its class and setting new standards in entry level speaker lines.

The compact multifunctional housing of the Cromo+ speaker line, with asymmetrical CD horns, can be used for many different applications, such as live events, a public address system for a singer, for monitoring purposes on stage, or for fixed installations in Bars or lounges.

All Cromo+ models have a microphone input on XLR and jack sockets for maximum flexibility.

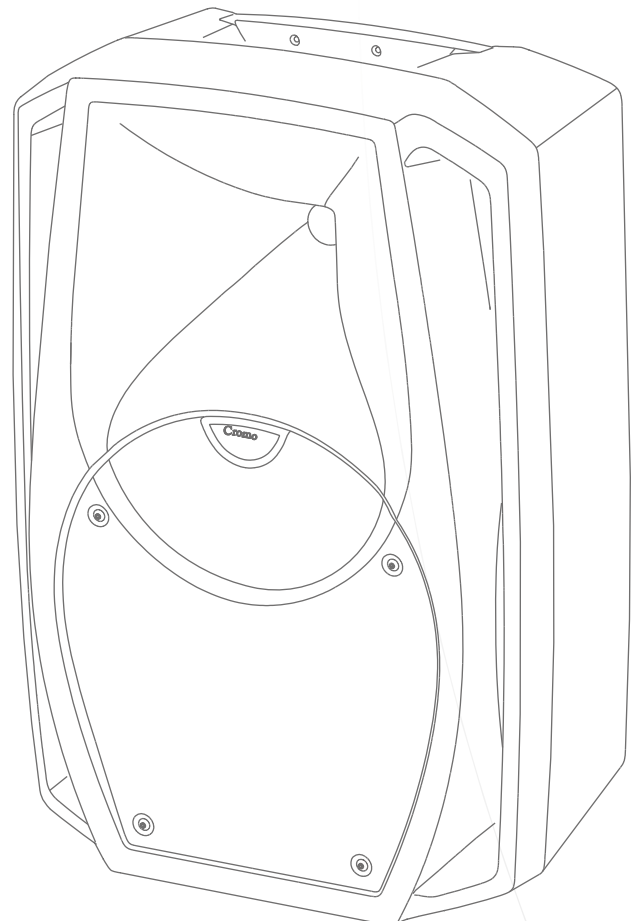

CROMO 8+

Technical Data

Speaker Type: 2-Way Active Speaker

Acoustical data

Frequency Response [-10dB]: 68 - 20.000 Hz
 Frequency Response [+/- 3dB]: 80 - 19.000 Hz
 Max SPL: 118 dB
 HF: 1 "
 Type HF: Compression driver
 Directivity: 90/70 x 60 °
 Horn: Asymmetrical CD Horn
 LF: 8 "

Amplifier

Amp Technology: Digipack™
 Amp Class: Class D
 Power PRG: 300 Watt

Processor

Controller: DSP 24bit/48kHz
 System Presets: Flat, Processed
 Limiter: Dual Active Peak, RMS, Thermal

Mechanics

Housing: Polyporpylen PP
 Angles Up: Monitor use 43 °
 Width: 270 mm (10.8 in)
 Height: 435 mm (17.4 in)
 Depth: 252 mm (10.08 in)
 Weight: 7,8 kg (15.43 lbs)

CROMO 10+

Technical Data

Speaker Type: 2-Way Active Speaker

Acoustical data

Frequency Response [-10dB]: 65 - 20.000 Hz
 Frequency Response [+/- 3dB]: 70 - 19.000 Hz
 Max SPL: 121 dB
 HF: 1 "
 Type HF: Compression driver
 Directivity: 90/70 x 60 °
 Horn: Asymmetrical CD Horn
 LF: 10 "

Amplifier

Amp Technology: Digipack™
 Amp Class: Class D
 Power PRG: 400 Watt

Processor

Controller: DSP 24bit/48kHz
 System Presets: Flat, Processed
 Limiter: Dual Active Peak, RMS, Thermal

Mechanics

Housing: Polyporpylen PP
 Angles Up: Monitor use 43 °
 Width: 320 mm (12.8 in)
 Height: 508 mm (20.32 in)
 Depth: 297 mm (11.88 in)
 Weight: 12 kg (26.46 lbs)

CROMO 12Club

Technical Data

Speaker Type: 2-Way Active Speaker

Acoustical data

Frequency Response [-10dB]: 55 - 20.000 Hz
 Frequency Response [+/- 3dB]: 60 - 19.000 Hz
 Max SPL: 124 dB
 HF: 1 "
 Type HF: Compression driver
 Directivity: 90/70 x 60 °
 Horn: Asymmetrical CD Horn
 LF: 12 "

Amplifier

Amp Technology: Digipack™
 Amp Class: Class D
 Power PRG: 400 Watt

Processor

Controller: DSP 24bit/48kHz
 System Presets: Flat, Processed
 Limiter: Dual Active Peak, RMS, Thermal

Mechanics

Housing: Polyporpylen PP
 Angles Up: Monitor use 43 °
 Width: 402 mm (16.08 in)
 Height: 615 mm (24.6 in)
 Depth: 356 mm (14.24 in)
 Weight: 17,7 kg (39.02 lbs)



CR 8+



CR 10+



CR 12
club

CROMO 12+

Technical Data

Speaker Type: 2-Way Active Speaker

Acoustical data

Frequency Response [-10dB]: 55 - 20.000 Hz
Frequency Response [+/- 3dB]: 60 - 19.000 Hz
Max SPL: 126 dB
HF: 1 "
Type HF: Compression driver
Directivity: 90/70 x 60 °
Horn: Asymmetrical CD Horn
LF: 12 "

Amplifier

Amp Technology: Digipack™
Amp Class: Class D
Power PRG: 600 Watt

Processor

Controller: DSP 24bit/48kHz
System Presets: Flat, Processed
Limiter: Dual Active Peak, RMS, Thermal

Mechanics

Housing: Polyporpylen PP
Angles Up: Monitor use 43 °
Width: 402 mm (16.08 in)
Height: 615 mm (24.6 in)
Depth: 356 mm (14.24 in)
Weight: 18,5 kg (39.68 lbs)

CROMO 15+

Technical Data

Speaker Type: 2-Way Active Speaker

Acoustical data

Frequency Response [-10dB]: 45 - 20.000 Hz
Frequency Response [+/- 3dB]: 50 - 19.000 Hz
Max SPL: 128 dB
HF: 1 "
Type HF: Compression driver
Directivity: 90/70 x 60 °
Horn: Asymmetrical CD Horn
LF: 15 "

Amplifier

Amp Technology: Digipack™
Amp Class: Class D
Power PRG: 600 Watt

Processor

Controller: DSP 24bit/48kHz
System Presets: Flat, Processed
Limiter: Dual Active Peak, RMS, Thermal

Mechanics

Housing: Polyporpylen PP
Angles Up: Monitor use 43 °
Width: 470 mm (18.8 in)
Height: 720 mm (28.8 in)
Depth: 405 mm (16.2 in)
Weight: 22.9 kg (50.49 lbs)



CR 12+



CR 15+