



Quam

8C10PAOT

MOISTURE RESISTANT

8" O.D. foam-edge, dual cone loudspeaker,
10 oz. magnet, 8Ω impedance





The 8C10PAOT is an 8" O.D. loudspeaker with a 10 oz. magnet, 8 Ohm nominal impedance and a phenolic resin impregnated, moisture resistant cone. Frame has a black powder coat finish.

INTENDED USE

Indoor or Protected Outdoor Environment	
Program Material	Signal tones, voice and music

AUDIO SPECIFICATIONS

Average Sensitivity	94 dB SPL, 1W/ 1M
Loudspeaker Power Rating	20W RMS, EIA 426A Standard
Calculated Output	101 dB SPL, 5W/ 1M
Magnet Type & Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	80 Hz - 8 kHz EIA 426A Standard
Nominal Coverage Angle	100° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	0.205" Spade lug

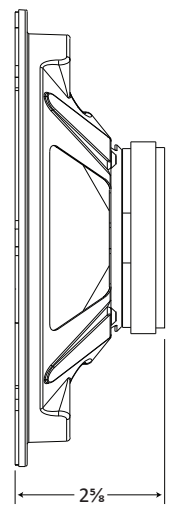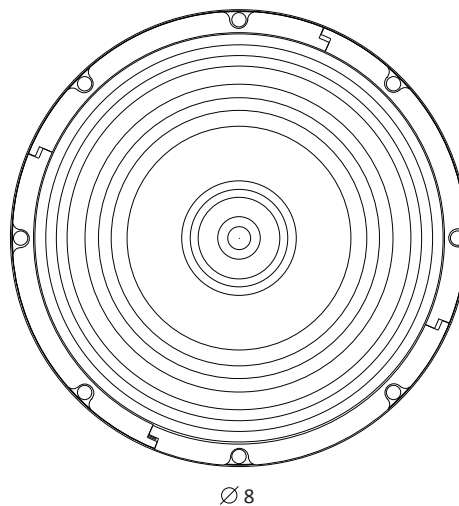

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at: www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com