

# NHB32-C

## Network Hub and Bridge



# NHB32-C

Rear Panel




**MIDI CobraNet** 1U

**32-in/32-out audio and control interface sends and receives digital audio and control signals via CobraNet.**


- A single NHB32-C unit can support up to 32-channels of digital audio I/O, and one control signal I/O.
- Four separate 8-channel AES/EBU input/output terminals.
- CobraNet™ transfers high-quality 20-bit or 24-bit 48 kHz digital audio over four bundle paths in real time.
- MIDI, head amp remote (AD8HR, AD824) and amplifier control.
- NetworkAmp Manager software allows central control of both audio and control signals.
- Up to eight NHB32-C units can be networked, with each unit transferring and receiving four bundles, and 64 channels of digital audio can be received from any ACU16-C or NHB32-C on the network via CobraNet™.
- A networked system with ACU16-C and NHB32-C units is capable of handling up to 64 channels of digital audio.
- Multicast and unicast modes can be used in combination to optimize bandwidth.
- Primary and secondary CobraNet™ ports are built-in, providing a redundant network for reliable operation.

### SYSTEM EXAMPLE

NetworkAmp Manager

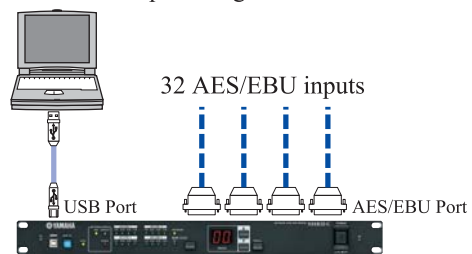

NetworkAmp Manager

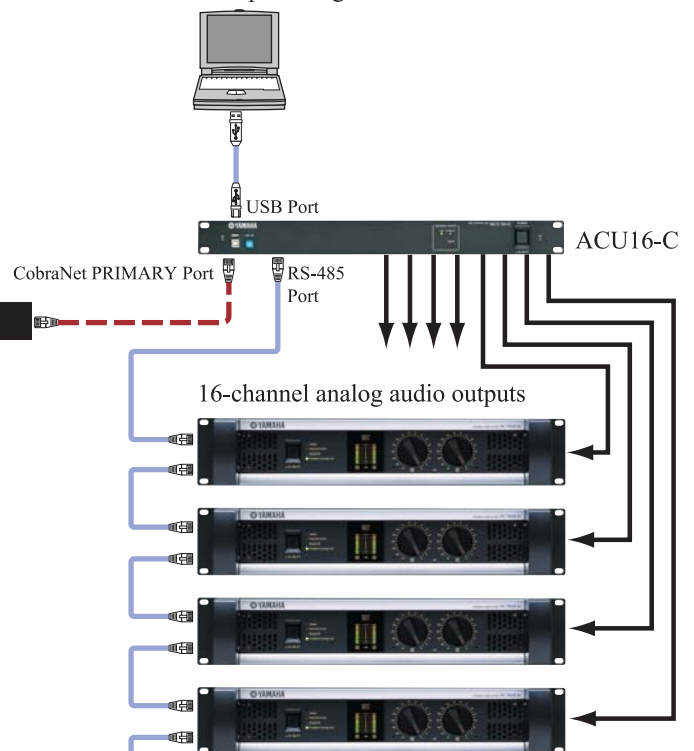

- CobraNet
- Amp Control
- Analog Audio
- - - AES/EBU


Up to 32 power amps

## GENERAL SPECIFICATIONS

<b>Maximum unit count</b>	8 units for a CobraNet network
<b>Max. input channel count</b> (from/to CobraNet)	32ch (48kHz/20bit); 28ch (48kHz/24bit)
<b>Sampling frequency rate</b>	48kHz, 96kHz
<b>Front panel</b>	USB : PC USB connector UNIT ID : ID dial WORD CLOCK SELECT : from AES/EBU; NETWORK; WORD CLOCK IN PATCH SELECT POWER ON/OFF
<b>Rear panel</b>	AES/EBU 1-4 : 8ch/connector; Dsub-25pin x 4 WORDCLOCK : IN/OUT; BNC x 2 CobraNet™ : PRIMARY/SECONDARY; RJ45 x 2 COM : Dsub-9pin (male); for AD8HR HA control TO COMPUTER : Dsub-9pin (male) MIDI : IN/OUT; DIN5pin x 2 (IN/OUT)
<b>Power requirements</b>	Japan: AC100V, 50/60Hz, 40W North America: AC110-120V, 50/60Hz, 40W Other Areas: AC220-240V, 50/60Hz, 40W
<b>Dimensions (W x H x D)</b>	480 x 44 x 386mm (18 7/8" x 1 3/4" x 15 3/16"), 1U
<b>Weight</b>	5.0kg (11lbs)

CobraNet™ is a registered trademark of Peak Audio, a Division of Cirrus Logic.

## DIMENSIONS

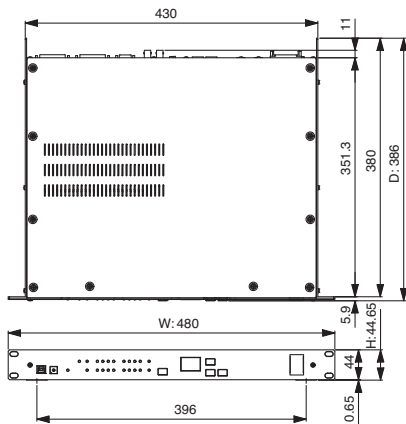

unit : mm