
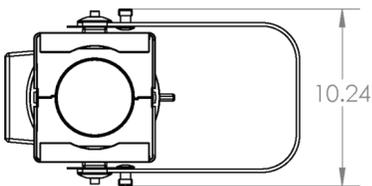
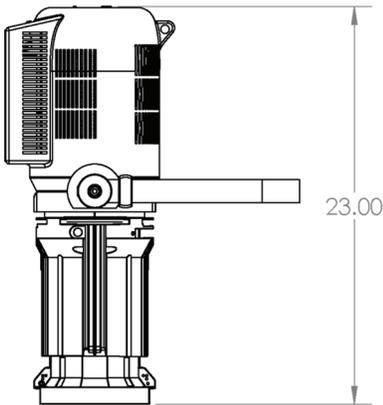


PHOENIX LED PROFILE SPOT

The 5°, 10°, 19°, 26°, 36° and 50° fixed focus Phoenix LED Profile Spots are state of the art luminaires in function, style, and efficiency. These Profile Spots have been designed and engineered with a number of innovative details and features enhancing versatility and efficiency without sacrificing performance. A diverse line of LED choices the Phoenix LED is available in 250 watt RGBA, RGBW, 3000k and 5600k versions. Fully locking shutters and a 360° rotating barrel help keep your keep the artistic part of your fixture's focus intact and easy to attain, and with virtually no light leak from the fixture itself you wont have to worry about any extra light illuminating unwanted parts of the ceiling. The aesthetic appearance and ergonomically designed function controls only add to the appeal. All of these new and innovative options are what makes the Phoenix LED Profile Spots ideal for theatres, Special Events, television studios, or wherever superior, energy efficient lighting performance is required.



LIGHTING

Catalog Numbers

PHX-5-*

PHX-10-*

PHX-19-*

PHX-26-*

PHX-36-*

PHX-50-*



250 WATT LED LED PHOENIX PROFILE SPOT

Features

- 250w RGBA, RGBW, 3000K & 5600k LED Profile Spots available.
- 360 degree rotating barrel
- Locking shutter
- Completely enclosed accessory holder
- Heat resistant Plano-Convex Lensing
- Die cast aluminum and sheet metal fabrication
- Color frame and spring clip safety cable included
- Tool free interchangeable barrels
- 3 foot PowerCON® power cable included
- C-Clamp included with fixture
- 26.45 lbs. (11.99 kgs.)
- ETL, cETL & CE listed.
- Lens tube included (except 5° & 10° lens)

Ordering Example: (Select item from each box)

Fixture	-	Wattage	-	LED Array	-	Lens	-	Color
	-		-		-		-	

Project:	Approval Date:
Location:	Fixture Type:

*Wattage: 2=250 watt

PHOENIX LED PROFILE SPOT

Specifications:

Housing: Die-cast aluminum construction

Yoke: Rigid flat steel with dual locking dog tilt handles, two mounting positions, indexed tilt angle markings.

Light Engine: RGBA, RGBW, 3000k, 5600k 50,000 hour LED Life. Quiet fan cooling for 250w.

Lenses: Color coded crown glass (white plate) lenses provided with anti-reflective coating. Molded front lens made out of polymeric plastic for 5 and 10 degree units only.

Body Color: Black, White, Silver and Custom

Rating: 100-240volt 50/60Hz Universal Power Input.

Electrical & Data: PowerCON® in and out connections. 5-pin DMX in and out. Requires power from non-dim source.

Shutters: Four .037" stainless steel, fully adjustable and lockable. Constructed with oversized heat resistant handles.

Ambient operating temperature: 14° - 104° F (-10° c - + 40°c)

Weight: 26.45 lbs. (11.99 kgs.)

PROFILE SPOT LIGHTING

Included Accessories	
6-CFB	Black Color Frame, 6.25"x6.25"
510	Malleable Iron Pipe Clamp
SC-36-BK	36" Black Safety Cable with Spring Clamp
Additional Accessories	
10-CFB	Black Color Frame, 12"x12" included with PHX-10 and C10)
12-CFB	Black Color Frame, 14"x14" included with PHX-5 and C5
510-HD	Heavy Duty Malleable Iron Pipe Clamp
4.5-DN	6.25"x 6.25" Donut, Black with 2-1/2" Hole
10-DN	12"x12" Donut, Black
12-DN	14"x14" Donut, Black
4.5-SN	6.25"x 6.25" Snoot, Black
10-SN	12"x12" Snoot, Black
12-SN-BK	14"x14" Snoot, Black
PHX-PH	Phoenix Steel Pattern Holder, "B" Size
PHX-GPH	Phoenix Glass Pattern Holder, "B" Size
PDII	Phoenix Drop-In Iris