

Ideal for supporting **ENG** dockable camcorders or **EFP** cameras equipped with long focal lenses and top mounted viewfinders, the **DELTA** is manufactured with an extensive use of ultra-light magnesium alloy.

The fully variable counterbalance system is designed to accommodate offset payloads of 22 Kg (48 lbs) ensuring excellent performances at any tilt angle.

The **DELTA** features a **continuously adjustable fluid damping mechanism** providing extremely smooth and precise camera movements.

Standard performances of +70, -60 degrees, with the European style quick attachment camera plate, can be increased to +/- 90 ° with the optional sliding base plate.

Powered by a 9v battery, two digital displays indicate the counterbalance and tilt drag values, while an illuminated spirit level allows easy set-up even in low light conditions.

■ specifications

Payload capacity at:
150 mm (6") 17 Kg (37 lbs)
100 mm (4") 22 Kg (49 lbs)

Weight: 3,5 Kg (7.7 lbs)

Pan range: 360°


Tilt range: +/- 90° with sliding base plate
 +70°/-60° with quick attachment plate

Counterbalance: Continuous

Fluid drag: Continuous

Bowl diameter: 100 mm

Temp. range: -40°/+60°C (-40°/+140°F)

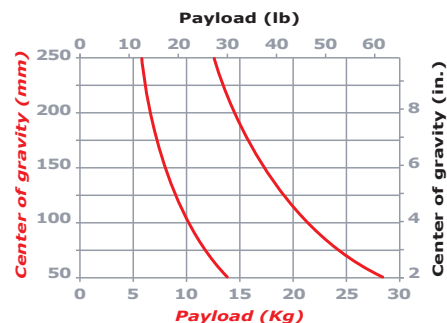

accessories ■

