

# Liberty Platinum Sound System

MADE IN USA



SIX YEAR WARRANTY


## Technical Specifications



### Features

- Reach Crowds of 1,500+
- AC Mode = 125W / DC Mode = 100W
- Single or Dual Built-in UHF Wireless with 16 User Selectable Channels
- Optional Built-In MP3 Player Accepts SD Card, USB Flash Drive or 3.5mm input for iPod
- Optional Built-In CD Player
- USB Port for Charging MP3 Player/iPod®
- "Voice Over" Music Ducking Feature
- Two Universal Microphone Input Jacks
- Recessed Back Panel Protects Knobs and Ports
- True AC/DC or AC only - 110/220V Power Supply
- Ceramic Compression Driver
- 10" Woofer
- Proprietary Class D Amplifier
- User Replaceable Batteries
- Charging LED Bar Indicator
- Operates 6-8 hours on a Single Charge
- Speaker Out to Power Companion Speaker

**AC Only Also Available**

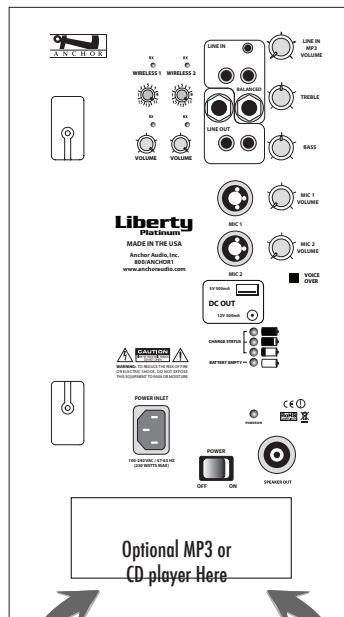

(LIB-7500MU2 with MP3 player)



(LIB-7500CU2 with CD player)

### LIBERTY MODELS AC/DC

- LIB-7500 AC/DC powered sound system
- LIB-7500U1 One built-in wireless receiver
- LIB-7500U2 Two built-in wireless receivers
- LIB-7500M Built-in MP3 player
- LIB-7500MU1 Built-in MP3 player & one built-in wireless receiver
- LIB-7500MU2 Built-in MP3 player & two built-in wireless receivers
- LIB-7500C Built-in CD player
- LIB-7500CU1 Built-in CD player & one built-in wireless receiver
- LIB-7500CU2 Built-in CD player & two built-in wireless receivers
- LIB-7501 Unpowered speaker

### UHF WIRELESS

- WH-6000 Wireless handheld microphone transmitter
  - WB-6000 Wireless body-pack transmitter (requires handsfree microphone)
- Microphone options include:  
Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBMTA4F

### TECHNICAL SPECIFICATIONS

Rated Power Output	125 watts AC / 100 watts DC	Mic Inputs:	Lo-Z (1 K $\Omega$ ), balanced, XLR
Max SPL @ Rated Power	117 dB		12 VDC condenser mic (phantom) power
Battery	Two 12 V, lead acid rechargeable, 9.0 AH Full recharge: approx 7 hrs		Hi-Z (10 K $\Omega$ ), unbalanced, 1/4" phone
Frequency Response	60 Hz - 15 kHz $\pm$ 3dB		Hi-Z (10 K $\Omega$ ), unbalanced, 1/8" stereo,
Line Output (post fader)	isolated, 600 $\Omega$ , 1/4" phone		1/4" phone
AC Power Reqs.	100 - 240 VAC, 50/60 Hz, 300W max	Line In/Out	unbalanced, stereo RCA
DC Out	12V 500mA	Sensitivity For Rated Output	
USB	5V 500mA	Lo-Z Microphone	-52 dBV (2.5 mVrms)
Dimensions (HWD)	22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)	Hi-Z Microphone	-43 dBV (7.5 mVrms)
Weight (AC/DC)	38 lbs / 17 Kg	Auxiliary (line)	-14 dBV (200 mVrms)
Weight (AC only)	26 lbs / 12 Kg	Phantom Power	36V
		Speaker Out	4-pole Neutrik Speakon® jack

(Features & Specifications Subject to Change Without Notice)



**Anchor Audio, Inc.**  
Portable Sound Systems • Carlsbad, California

**800.262.4671**  
www.anchoraudio.com