

Panasonic

PT-EZ580 Series

LCD Projectors

PT-EZ580/PT-EZ580L
PT-EW640/PT-EW640L
PT-EW540/PT-EW540L
PT-EX610/PT-EX610L
PT-EX510/PT-EX510L



Smart Choice.

Bright, Quiet, and Economical Projection Solutions




PT-EZ580/EZ580L	5,400 lm	5,000 : 1	WXGA
PT-EW640/EW640L	5,800 lm	5,000 : 1	WXGA
PT-EW540/EW540L	5,000 lm	2,000 : 1	WXGA
PT-EX610/EX610L	6,200 lm	5,000 : 1	XGA
PT-EX510/EX510L	5,300 lm	2,000 : 1	XGA







Lecture Halls

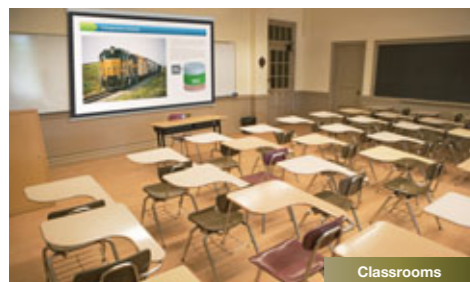

Classrooms

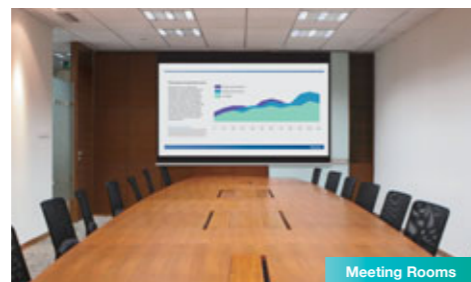

Meeting Rooms

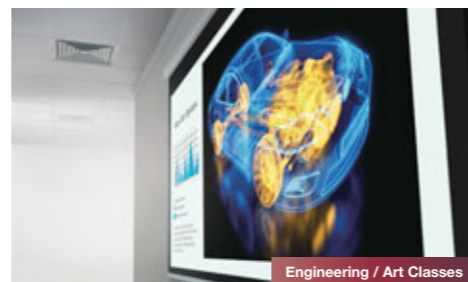

Engineering / Art Classes

High Picture Quality

Vivid Pictures in Bright Environments

With up to 6,200 lm*2 of brightness, the PT-EZ580 Series serves up brilliant, punchy images even with the lights on. Text is sharp and clearly legible while graphics, photos, and video images are reproduced with a clean and natural vibrancy.

High Contrast Performance with Iris


Expect dazzling highlights and inky blacks with a high contrast ratio of 5,000:1*3 assisted by an iris, which alters brightness according to the scene or image.

WUXGA Resolution for Brilliant Full HD images

With native WUXGA 1920 x 1200-pixel widescreen resolution, the PT-EZ580/EZ580L is capable of displaying Full HD video from Blu-ray Disc and other sources in beautifully rich, vivid detail.

Daylight View Basic Function for Bright Pictures in Well-Lit Environments

Panasonic's Daylight View Basic technology resolves hidden details in dark images that are normally difficult to see in bright conditions. Using an ambient light sensor, Daylight View Basic adjusts halftone color and brightness to suit the room. Resulting images are clear, bright, and easy to see.

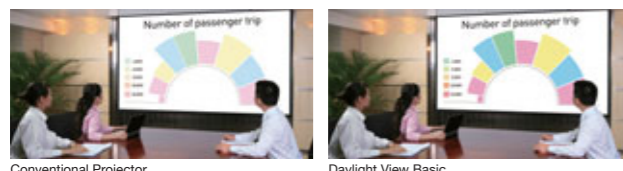

Conventional Projector

Daylight View Basic

Easy Multi-Source Viewing with Side-by-Side and P-in-P Modes

Two different image sources can be simultaneously displayed on a single screen. You can also switch to P-in-P mode and display a sub-window on the main screen. The sub-window can be positioned in any corner of the screen to expand the usable area.

DICOM Simulation Mode*4 for Medical Training

The PT-EZ580 Series is compatible with DICOM standards for presentations relating to medicine. DICOM Simulation Mode reproduces complex images, such as X-rays, with exceptionally high levels of detail and contrast.




Normal Mode

DICOM Simulation Mode

Color Adjustment Function

A color adjustment function allows you to easily correct for slight variations in the color reproduction range of individual units set up for multiple projection, particularly in side-by-side configuration. Correction can be performed on 3 colors or 7 colors.

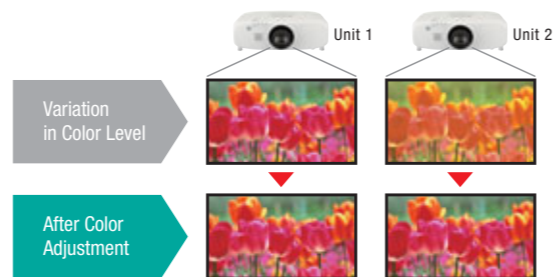

Variation in Color Level

After Color Adjustment

"The picture looks dim and washed out, even with the lights off."



SOLUTION



Brilliant high-quality images in bright environments



"Our AV network is aging and the maintenance costs are blowing out."



SOLUTION



Long-life lamp and filter contribute to a much lower TCO



"We have a lot of devices to connect, and the wiring is becoming a nightmare."



SOLUTION



Easy installation with DIGITAL LINK and easy setup features



Introducing the PT-EZ580 Series — compact yet powerful projectors designed to light up lecture theaters and conference rooms with big, brilliantly detailed images in up to WUXGA*1 resolution. Stellar picture quality combines with simple system integration and ultimate ease of use, while periodical maintenance has been pushed back further than ever before. Flexible, economical, and engineered for everyday reliability, the PT-EZ580 Series answers the toughest questions with innovative projection technology.

Quiet
29dB*
Operation



The Answer is Panasonic.

* With lamp power set to Eco.

Specifications						
Model	PT-EZ580/EZ580L	PT-EW640/EW640L	PT-EW540/EW540L	PT-EX610/EX610L	PT-EX510/EX510L	
Power supply	100–240 V AC, 50/60 Hz					
Power consumption	510 W [0.3 W with Standby Mode set to Eco*, 10 W with Standby Mode set to Normal, 37 W with the Audio Setting's In Standby Mode set to ON.]					
LCD panel	Panel size	19.0 mm [0.76"] diagonal [16:10 aspect ratio]			20.0 mm [0.79"] diagonal [4:3 aspect ratio]	
	Display method	Transparent LCD panel (x 3, R/G/B)				
	Drive method	Active matrix				
	Pixels	2,304,000 [1,920 × 1,200] × 3, total of 6,912,000 pixels	1,024,000 [1,280 × 800] × 3, total of 3,072,000 pixels		786,432 [1,024 × 768] × 3, total of 2,359,296 pixels	
Lens	PT-EZ580/EW640/EW540/EX610/EX510: powered zoom [1.7–2.8:1], powered focus F 1.7–2.3, f 26.9–45.4 mm. PT-EZ580L/EW640L/EW540L/EX610L/EX510L: optional powered zoom/focus and fixed-focus lens					
Lamp	335 W UHM lamp × 1					
Lamp replacement cycle	4,000 hours*2 (lamp power: Normal), 4,500 hours*2 (lamp power: Eco)					
Screen size (diagonal)	1.02–10.16 m [40–400 in], 16:10 aspect ratio			1.02–10.16 m [40–400 in], 4:3 aspect ratio		
Brightness*3	5,400 lm (lamp power: Auto/Normal, Dynamic Mode, standard lens)	5,800 lm (lamp power: Auto/Normal, Dynamic Mode, standard lens)	5,000 lm (lamp power: Auto/Normal, Dynamic Mode, standard lens)	6,200 lm (lamp power: Auto/Normal, Dynamic Mode, standard lens)	5,300 lm (lamp power: Auto/Normal, Dynamic Mode, standard lens)	
Center-to-corner uniformity*3	90 %					
Contrast*3	5,000:1 (full on/full off, lamp power: Auto, Iris: ON)		2,000:1 (full on/full off, lamp power: Auto)	5,000:1 (full on/full off, lamp power: Auto, Iris: ON)		
Resolution	1,920 × 1,200 pixels	1,280 × 800 pixels (Input signals that exceed this resolution will be converted to 1,280 × 800 pixels)		1,024 × 768 pixels (Input signals that exceed this resolution will be converted to 1,024 × 768 pixels)		
Scanning frequency	DVI-D/HDMI/DisplayPort/DIGITAL LINK	Dot clock: 25 MHz–162 MHz (VGA: 640 × 480 pixels to WUXGA: 1,920 × 1,200 pixels, VESA CVT-RB compliant, compatible with HDCP) DisplayPort and DIGITAL LINK not included on PT-EW540/EW540L and PT-EX510/EX510L.				
	RGB (analog)	fr: 15 kHz – 91 kHz, fv: 24 Hz – 120 Hz, dot clock: up to 162 MHz				
	YPbPr (YCbCr)	fr: 15.73 kHz, fv: 59.94 Hz [480i [525i]] fr: 31.47 kHz, fv: 59.94 Hz [480p [525p]] fr: 15.63 kHz, fv: 50 Hz [576i [625i]] fr: 31.25 kHz, fv: 50 Hz [576p [625p]] fr: 45.00 kHz, fv: 60 Hz [720 [750]/60p]	fr: 37.50 kHz, fv: 50 Hz [720 [750]/50p] fr: 33.75 kHz, fv: 60 Hz [1080 [1125]/60i] fr: 28.13 kHz, fv: 50 Hz [1080 [1125]/50i] fr: 28.13 kHz, fv: 25 Hz [1080 [1125]/25p] fr: 27.00 kHz, fv: 24 Hz [1080 [1125]/24p]	fr: 27.00 kHz, fv: 48 Hz [1080 [1125]/24sF] fr: 33.75 kHz, fv: 30 Hz [1080 [1125]/30p] fr: 67.50 kHz, fv: 60 Hz [1080 [1125]/60p] fr: 56.25 kHz, fv: 50 Hz [1080 [1125]/50p]		
	Video/YC	fr: 15.73 kHz, fv: 59.94 Hz [NTSC/NTSC4.43/PAL-M/PAL60], fr: 15.63 kHz, fv: 50 Hz [PAL/SECAM/PAL-N]				
Optical axis shift	Vertical ±60 %, horizontal ±10 % from center of screen (powered)*4			Vertical ±50 %, horizontal ±10 % from center of screen (powered)*4		
Keystone correction range	Vertical: ±40°*5, horizontal: ±30°*5					
Installation	Ceiling/floor, front/rear					
Built-in speaker	3.7 cm round shape × 1, output power: 10.0 W (monaural)					
Terminals	DVI-D IN: DVI-D 24-pin × 1 (DVI 1.0 compliant, compatible with HDCP, compatible with single link only)					
	HDMI IN: HDMI 19-pin × 1 (Deep Color, compatible with HDCP), audio signal: Linear PCM (Sampling frequency: 48 kHz/44.1 kHz/32 kHz)					
	DisplayPort IN: DisplayPort 20-pin × 1 (DisplayPort 1.1, compatible with HDCP), audio signal: Linear PCM (Sampling frequency: 48 kHz/44.1 kHz/32 kHz)		—		DisplayPort IN: DisplayPort 20-pin × 1 (DisplayPort 1.1, compatible with HDCP), audio signal: Linear PCM (Sampling frequency: 48 kHz/44.1 kHz/32 kHz)	
	RGB 1 IN: D-sub HD 15-pin (female) × 1					
	RGB 2 IN: BNC × 5 (RGB/Y • Pb [Ca] • Pr [Cr] × 1), shared with VIDEO IN (S-video/composite video)					
	VIDEO IN: Pin jack × 1					
	MONITOR OUT: D-sub 15-pin (female) × 1 (compatible with RGB/Y • Pb [Ca] • Pr [Cr])					
	AUDIO IN: Pin jack (L/R) × 1, M3 × 2					
	AUDIO OUT: M3 × 1 (variable)					
	SERIAL IN: D-sub 9-pin (female) × 1 for external control					
	REMOTE IN: M3 × 1 for wired remote control					
	REMOTE IN 2: D-sub 9-pin (female) × 1 for external control					
	LAN: RJ-45 × 1 for network connection, DIGITAL LINK, 100Base-TX, compatible with PjLink™		LAN: RJ-45 × 1 for network connection, 10Base-T, 100Base-TX, compatible with PjLink™		LAN: RJ-45 × 1 for network connection, DIGITAL LINK, 100Base-TX, compatible with PjLink™	
	LAN: RJ-45 × 1 for network connection, 10Base-T, 100Base-TX, compatible with PjLink™					
Operating noise*3	35 dB (lamp power: Normal), 29 dB (lamp power: Eco)					
Filter	× 1, replacement cycle: up to 17,000 hours*8					
Mechanical shutter	Yes	— (AV mute)		Yes	— (AV mute)	
Cabinet materials	Molded plastic (PC + ABS)					
Dimensions (W × H × D)	PT-EZ580/EW640/EX610/EX510: 530 × 177*9 × 445 mm [20-7/8 × 6-31/32*9 × 17-1/2 in] [with supplied lens] PT-EZ580L/EW640L/EX610L/EX510L: 530 × 177*9 × 385 mm [20-7/8 × 6-31/32*9 × 15-5/32 in] [without lens]					
Weight*7	PT-EZ580/EW640/EX610/EX510: Approximately 10.6 kg [23.4 lbs] [with supplied lens] PT-EZ580L/EW640L/EX610L/EX510L: Approximately 9.8 kg [21.6 lbs] [without lens]					
Operating environment	Operating temperature: 0 °C–45 °C [32 °F–113 °F]*10, operating humidity: 10 %–80 % [no condensation]					
Supplied accessories	Power cord with power cord holder, wireless/wired remote control unit × 1, batteries (R03/LR03/AAA type × 2), Software CD-ROM × 1 [Logo Transfer Software, Multi Projector Monitoring and Control Software]					

*1 When the Standby Mode is set to Eco, network functions such as Power On via LAN will not operate. Also, only certain commands can be received for external control using the serial terminal.

*2 The values above are maximum values when they are used in cycles of being turned on for 2 hours and off for 0.25 hours. When the lamps are turned on and off more frequently, the lamp replacement cycle is shortened. The usage environment affects the lamp replacement cycle. *3 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards. *4 The axis shift function cannot be used with the ET-ELW21. *5 With vertical correction only. *6 With horizontal correction only. *7 Average value. May differ depending on the actual unit. *8 The usage environment affects the duration of the filter. *9 With legs at shortest position. *10 The operating temperature range is 0 °C to 40 °C [32 °F to 104 °F] when used at altitudes between 1,400 m and 2,700 m [4,593 ft to 8,858 ft] above sea level. When operating temperature exceeds 40 °C [35 °C at high altitude], lamp power may automatically switch to Eco in order to protect the projector. Models with an "L" designation are sold without a lens.

Panasonic®



For more information about Panasonic projectors, please visit:
 Projector Global Web Site – panasonic.net/avc/projector
 Facebook – www.facebook.com/panasonicprojector
 YouTube – www.youtube.com/user/PanasonicProjector

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. The projection distances and throw ratios given in this leaflet are intended only as guidelines. For more detailed information, please consult the dealer from whom you are purchasing the product. The PjLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. Crestron Connected is a trademark of Crestron Electronics, Inc. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. DisplayPort is a trademark or registered trademark of the Video Electronics Standards Association. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Projection images simulated. © 2014 Panasonic Corporation. All rights reserved.

All information included here is valid as of March 2014.

PT-EZ580G1 Printed in Japan.