

XTREME

DUAL-FUNCTION SOUND SYSTEM

MADE IN THE USA!

Reach crowds of 5,000+



Delivers up to 123 dB
of clear sound

Clear and powerful sound,
thanks to an 8-inch woofer
and constant-directivity
titanium dome compression
driver in a ported enclosure

Active limiter—keeps sound
clean even when driven hard

The XLR input allows use
of line level or microphone
sources, with or without
condenser mic power

Neutrik Speakon® connector
for use with XTR-6001

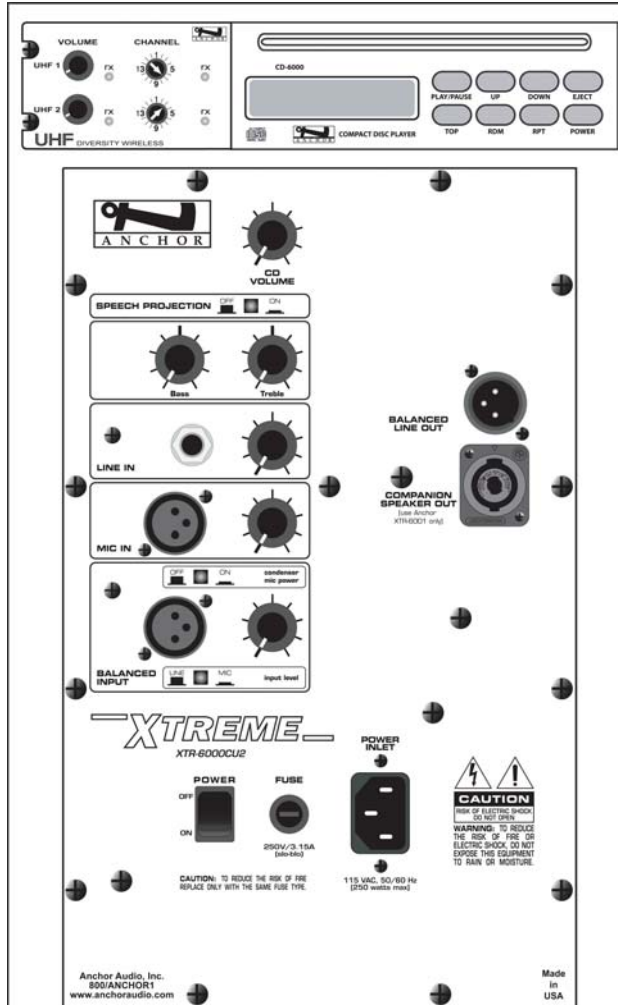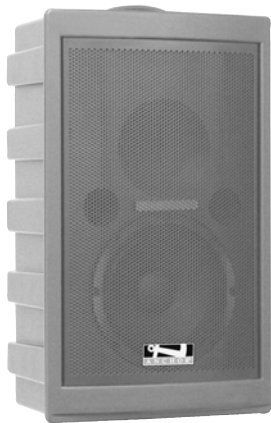

(XTR-6000CU2 Back Panel Shown)

6-YEAR WARRANTY!

Now featuring 16 channel UHF
diversity wireless
by Anchor Audio

Rugged CD mechanism with
blue back-lit display and bar
graph level display

Up to 2 wireless receivers with
built-in CD player


Line-level, balanced
output supplies signal to
additional sound system

Speech projection mode
provides crystal-clear
voice projection

Bi-amplified; separate high and
low frequency amplifiers for
enhanced performance

Daisy-chain ready,
connect Xtreme's together for
expanded coverage

Xtreme Daisy-Chain



Simple line-out to line-in
connection expands your coverage

UHF WIRELESS

WH-6000
Handheld wireless microphone/
transmitter

WB-6000
Wireless body-pack transmitter

Microphone options include:
Lapel/LM-60, Collar/CM-60 and
Headband/HBM-60

ACCESSORIES

XTR-6001
Unpowered companion speaker

FL-4500
Admiral lectern

MIC-90
Professional dynamic, cardioid
pattern handheld mic

SS-550
Heavy-duty speaker stand

NL-6000
Storage cover

HC-1650L/X
Custom traveling hard case

SC-100NL
100' speaker cable for XTR-6001

EX-50PP
50' shielded line cable

MODELS

XTR-6000
AC powered sound system

XTR-6000C
AC powered sound system with
CD player installed

XTR-6000U1
AC powered sound system with
1 wireless receiver installed

XTR-6000U2
AC powered sound system with
2 wireless receivers installed

XTR-6000CU1
AC powered sound system with
CD player and 1 wireless
receiver installed

XTR-6000CU2
AC powered sound system with
CD player and 2 wireless
receivers installed

SPECIFICATIONS

XTR-6000

Rated power output	
Stand-alone:	130 watts
w/XTR-6001:	200 watts
Max SPL @ rated power	
Projection mode:	123 dB
Music mode:	116 dB
Frequency response	
Music mode	80 Hz - 15 kHz
Projection mode:	+7 dB from 2 - 12 kHz
Bass/Treble control:	8 db cut/boost @ 100 Hz, 8 kHz
Line input:	1/4" phone, Hi-Z, unbalanced
Mic input:	XLR female, Lo-Z, 12 VDC phantom power
Balanced input:	XLR female, switchable mic/line level 12 VDC phantom power (switchable)
Sensitivity for rated output	
Unbalanced line:	-18 dBV (125 mVrms)
Balanced mic:	-58 dBV (1.25 mVrms)
Balanced input - mic:	-58 dBV (1.25 mVrms)
Balanced input - line:	-15 dBV (175 mVrms)
Line output (post fader):	XLR male, 600Ω, active balanced
Speaker Output:	4-pole Neutrik Speakon® jack for XTR-6001
AC power requirements:	110 - 125Vac, 50/60 Hz, 250W Max 210 - 240Vac, 50/60 Hz, 250W Max
Dimensions (HWD):	22.5 x 13 x 10", 57 x 33 x 26 cm
Weight:	35 pounds, 16 Kg.

Specifications subject to change without notice.

Anchor Audio, Inc. • Torrance, California



(310) 784-2300 • www.anchoraudio.com