



## Features

- Advanced new Dual Concentric driver design utilizing Omnimagnet technology
- Torus Ogive Waveguide device for improved broadband directivity
- Improved time alignment and phase coherence, delivering even better sonic performance
- High power and high sensitivity with extended frequency response and very low distortion
- Improved LF performance for applications where genuine bottom-end is a must
- Low insertion-loss, 30 watt line transformer for a more powerful and dynamic performance
- Convenient front-tapping switch for settings
- Adjustable tilt angle with 360-degree rotation to accommodate difficult loudspeaker placements
- Three-clamp, self-aligning mounting system
- UV/weather resistant UL94V-0 ABS construction for structural integrity
- Packaged with classic grille, tile rails and C-ring for quick and easy installation and simple stocking logistics
- Five year warranty

## Applications

- Voice Alarm Systems
- Multizone Foreground Music & Paging Systems
- Boardrooms & Offices
- Business Music Systems
- Airports, Convention Centres, Hotels
- Reception / Waiting Rooms
- Houses of Worship
- Retail Outlets / Shopping Malls
- Lounges / Bars
- Cruise Ships
- Courtrooms

## Product description

The Tannoy CMS 403DCe is a full bandwidth, high power-handling and high sensitivity loudspeaker built around CMS 3.0 – the third generation of Tannoy’s revolutionary Ceiling Monitor System technology. Based on an all-new evolution of Tannoy’s proprietary Dual Concentric point-source driver, the CMS 403DCe has been fundamentally re-engineered to deliver wider and more consistent broadband directivity, even greater intelligibility, and a more accurate and linear response.

The new Dual Concentric driver design features revolutionary Omnimagnet™ technology and unique patent-pending Torus Ogive Waveguide™ device, together providing more consistent and controlled directivity along with improved high frequency response. Improved time-alignment and greater coherence between LF and HF results in a wider sweet spot for enhanced performance both on- and off-axis. The re-designed baffle provides a subtle extension to the waveguide effect for additional sonic benefits.







The CMS 403DCe also features extra clamp extension to accommodate thicker ceiling panels, and a locking design that prevents inadvertent over-screwing. Specifically designed for fast, simple and cost effective installation in new and existing buildings, the CMS 403DCe can be entirely angled towards the listener within the fixed ceiling-mounting ring. By discreetly pivoting the loudspeaker towards the desired area of coverage, the problems of difficult speaker placement - particularly in less than perfect room configurations – are easily overcome.

The CMS 403DCe utilizes a 16 ohm driver, making it ideal for use in high performance low-impedance systems (with optimized performance when used in conjunction with Lab.gruppen LUCIA amplifiers). A low-insertion loss 30W transformer is included, with convenient front switching for taps at 30 W, 15 W and 7.5 W, with an additional 3.75 W tap for traditional constant voltage systems.


The CMS 403DCe is supplied with an integral back-can, ready to install as a single unit. The removable locking connector has screw terminals for secure wire termination and loop-thru facility. Strain relief is provided by a clamping mechanism for use with plenum-rated cable or conduit, while the new design’s spring-loaded and self-aligning clamps make for even quicker and easier installation. All models are supplied with two tile support rails and one C-ring; a plaster (mud) ring is available as an optional accessory.

## Physical data

<b>Bezel diameter:</b>	205.0 mm (8.07")	<b>Hole Cutout Diameter:</b>	187.0 mm (7.36")
<b>Front of ceiling to rear of pod:</b>	147.6 mm (5.81")		




### 1 m on-axis Frequency Response

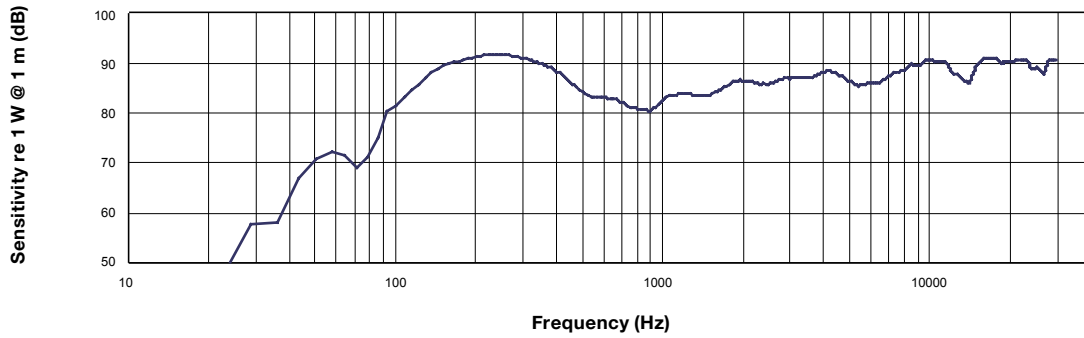


## Anechoic Frequency Response

### Impedance vs frequency

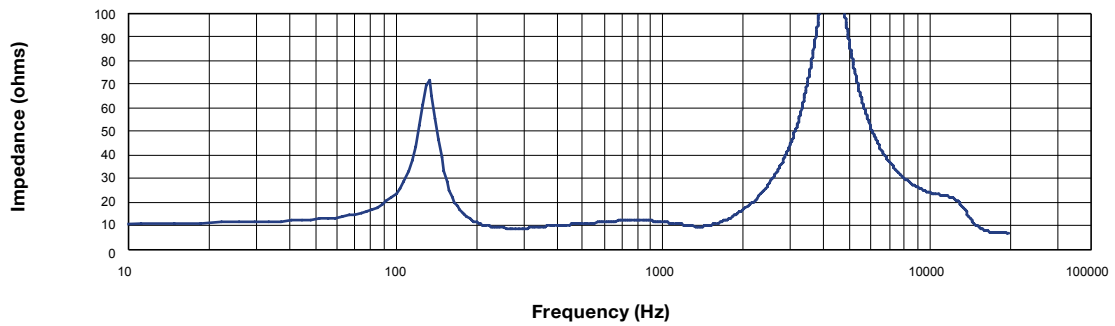


## Impedance

### Off-axis Frequency Response

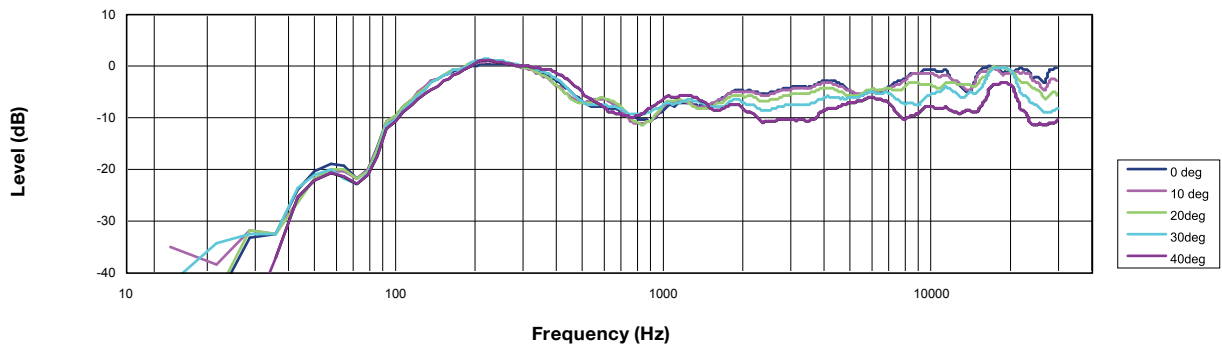


## Off Axis Response

Beamwidth vs Frequency

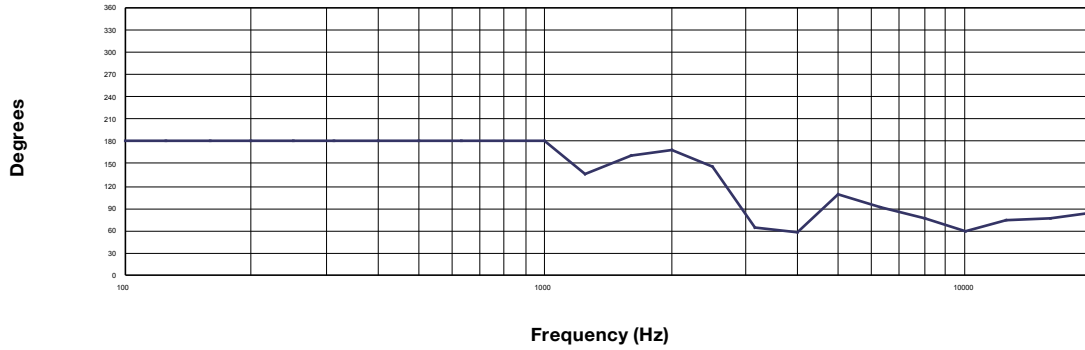

Beamwidth

Directivity Index (DI)






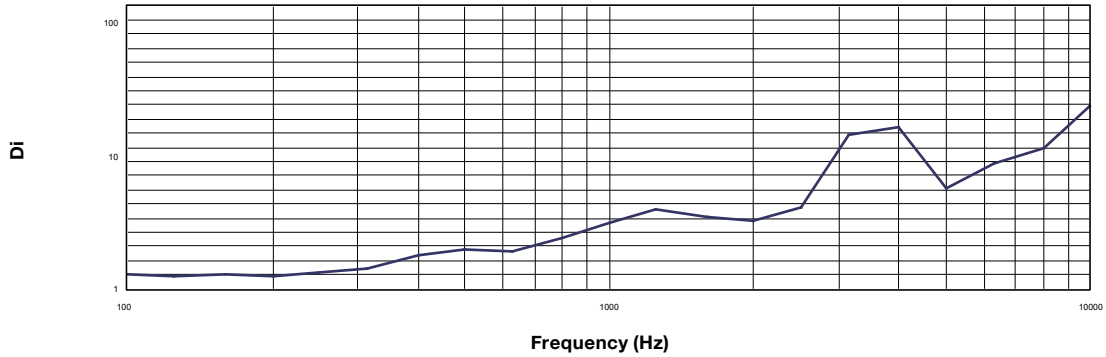


Directivity Index

# Technical Data Sheet

## Polar plots (1/3 octave)

# CMS 403DCe

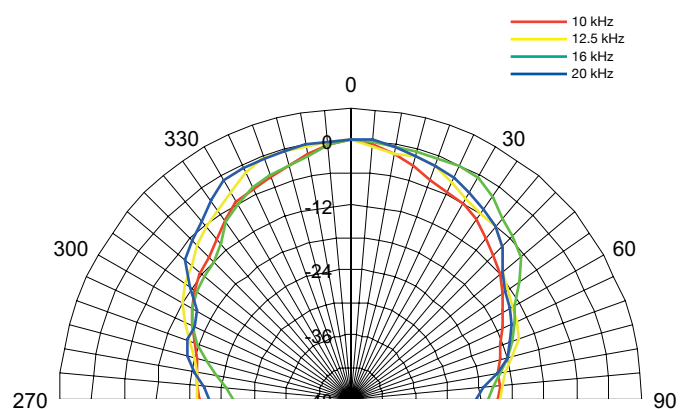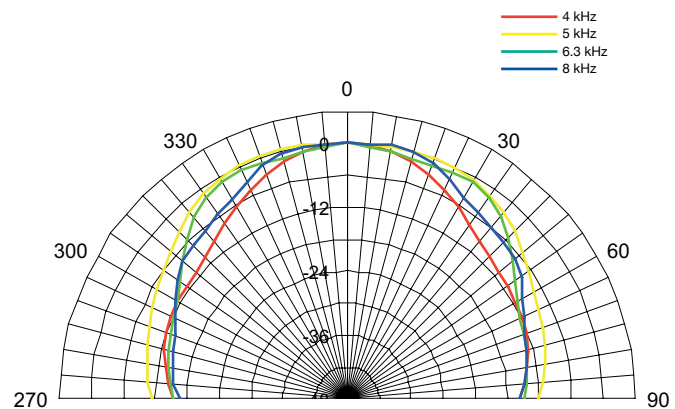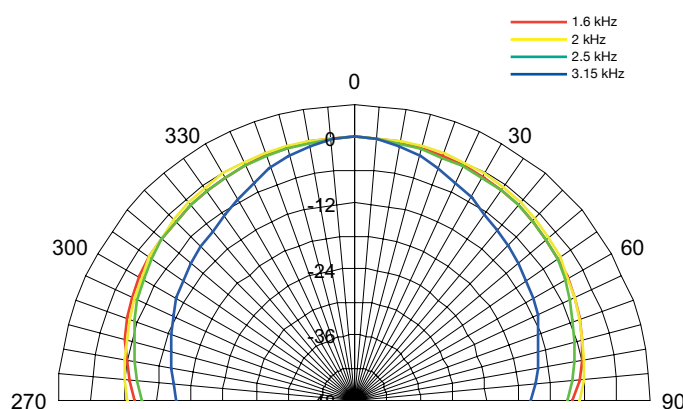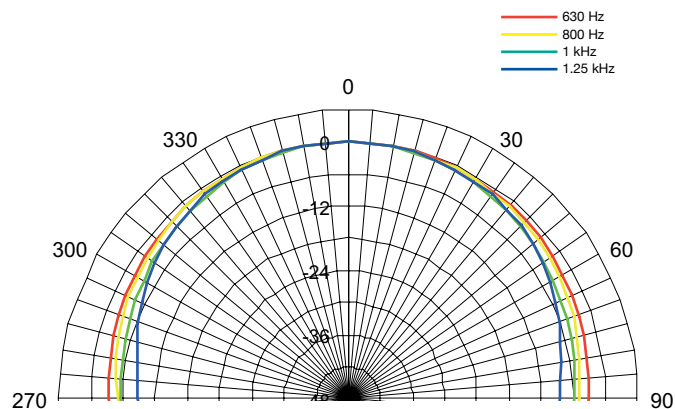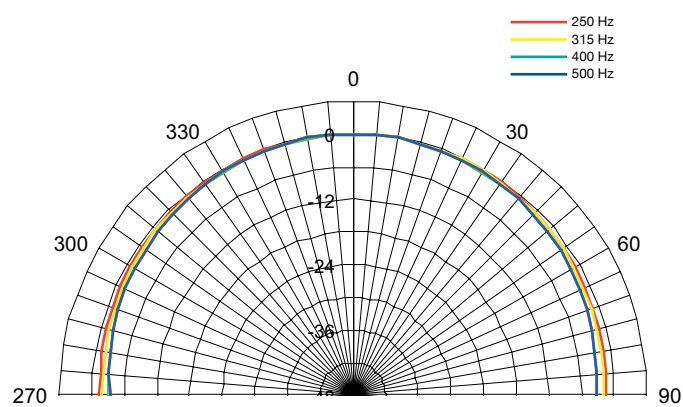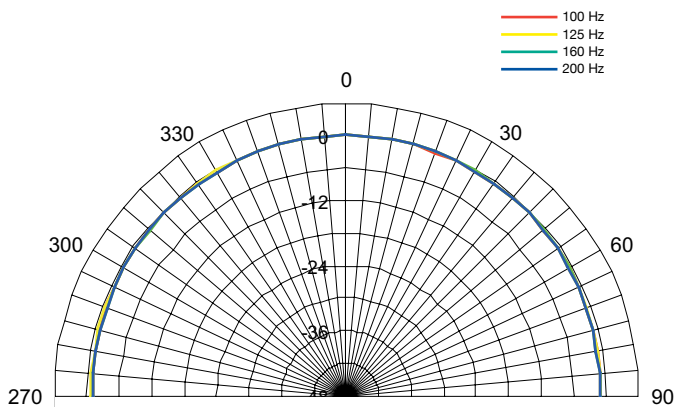

# Technical Data Sheet

## Specifications

# CMS 403DCe

### Performance

<b>Frequency response (-3 dB) <sup>(1)</sup></b> BM Backcan	110 Hz - 50 kHz
<b>Frequency range (-10 dB) <sup>(1)</sup></b> BM Backcan	80 Hz - 54 kHz
<b>System sensitivity (1 W @ 1 m) <sup>(2)</sup></b>	88 dB (1 W = 4 V for 16 Ohms)
<b>Nominal Coverage Angle</b>	90 degrees conical
<b>Power Handling <sup>(3)</sup></b>	
Average	60 W
Programme	120 W
Peak	240 W
<b>Recommended Amplifier Power</b>	120 W @ 16 ohms
<b>Nominal Impedance (Lo, Z)</b>	16 ohms
<b>Rated maximum SPL</b>	
Average	106 dB
Peak	112 dB
<b>Transformer Taps (via front rotary switch)</b>	
70 V	30 W (165 Ω) / 15 W (330 Ω) / 7.5 W (660 Ω) / 3.75 W (1320 Ω) / OFF & low impedance operation
100 V	30 W (330 Ω) / 15 W (660 Ω) / 7.5 W (1320 Ω) / OFF & low impedance operation

### Transducers

<b>Dual Concentric point source driver</b>	1 x 100 mm (4.0") Dual Concentric driver, using Omnimagnet technology
<b>Low Frequency</b>	35 mm (1.38") voice coil, treated multi fiber paper pulp cone
<b>High Frequency</b>	20 mm (0.79") PEI dome

### Physical

<b>Enclosure</b>	
Backcan	Reflex loaded UL 94V-0 rated ABS
Baffle	Reflex loaded UL 94V-0 rated ABS
Grille	Steel, with weather resistant coating
<b>Safety Features</b>	Safety ring located at rear of enclosure for load bearing safety bond
<b>Backcan</b>	
Blind Mount (BM)	Complete with fixed backcan
<b>Connectors</b>	Removable locking connector with screw terminals with "loop through" facility
<b>Compliance</b>	UL-1480, UL-2043, CE
<b>Dimensions</b>	
Bezel diameter	205.0 mm (8.07")
Front of ceiling to rear of pod	147.6 mm (5.81")
<b>Hole cutout diameter</b>	187 mm (7.36")
<b>Net Weight (ea)</b>	2.75 kg (6.06 lbs)
<b>Included Accessories</b>	C-Ring, tile-bridge kit, paint mask, cut-out template, grille
<b>Optional Accessories</b>	Plaster (mud) ring
<b>Packed Quantity</b>	2

### Ordering Information

Part Number	Colour
8001 7410 CMS 403DCe	White / Paintable
8001 4180 CMS 403e Plaster (Mud) Ring	Zinc Plated Steel



#### Notes:

- Average over stated bandwidth. Measured in an IEC baffle in an Anechoic Chamber
- Unweighted pink noise input, measured at 1 metre on axis
- Long term power handling capacity as defined in EIA - 426B test

A full range of measurements, performance data, CLF and Ease™ Data for CMS 403DCe can be downloaded from [www.tannoypro.com](http://www.tannoypro.com).

Tannoy operates a policy of continuous research and development. The introduction of new materials or manufacturing methods may introduce variations in actual performance; however, actual performance always will equal or exceed the published specifications, which Tannoy reserves the right to alter without prior notice. Please verify the latest specifications when dealing with critical applications.

Copyright (c) 2014 Tannoy Limited. All rights reserved.