



PLATINUM PROFILE LED™ PRELIMINARY SPECIFICATIONS

The new Platinum Profile LED™ is a profile / framing shutter LED spot illuminare featuring a 180W LED engine, 6,500K, >85CRI, 9,000 total lumens, 18° beam angle, 7 dichroic colors including UV, and white, 7 rotating interchangeable and 7 fixed gobos, 3-facet rotating prism, frost filter, 3 and 5 pin DMX in/out and powerCON connections, (6) button control full color 180° reversible menu display, a multi-voltage universal auto switching power supply (100-240v), and flicker free operation for TV and FILM.



FEATURES

Profile / Framing Shutter 18° Spot LED Illuminare

180W LED Engine with 20,000 Average LED Life

9,000 Lumens, 6,500K, >65CRI

(4) Rotating Framing Shutter Blades

7 Dichroic Colors Including UV + White

7 Rotating Interchangeable and 7 Fixed Gobos

3-Facet Rotating Prism and Frost Filter

Flicker Free Operation For Broadcast TV and FILM



ELATION | PLATINUM PROFILE LED™ | Product Specification Sheet



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

Profile / Framing Shutter 18° LED Spot Illuminare
 (4) Rotating Framing Shutter Blades
 Flicker Free Operation For Broadcast TV and FILM

SOURCE

180W LED Engine
 20,000 Hour Average LED Life

PHOTOMETRIC DATA

9,000 Total Lumens, 6,500K, >85CRI
 6,958 LUX 643 FC @16.4' (5m) (18° Full ON)
 7,585 LUX 705 FC @33.0' (10m) (18° Full ON)

EFFECTS

(4) Rotating Framing Shutters + Blade Macros
 3-Facet Rotating Prism and Prism Macros
 Frost Filter
 Motoried Focus
 Iris: 5% - 100%
 Strobe: 1-18fps
 Dimming: 0% - 100%

COLOR

7 Dichroic Colors Including UV, + White (Open)

GOBOS

2 Gobo Wheels
 7 Interchangeable / Rotating / Indexing Gobos
 Gobo Size: pending
 7 Fixed / Indexing Gobos

CONTROL / CONNECTIONS

(3) DMX Channel Modes (22/24/33)
 RDM (Remote Device Management)
 6 Button Touch Control Panel
 Full Color 180° Reversible LCD Menu Display
 8 / 16 Bit Resolution Adjustable Movement
 3pin & 5pin DMX In/Out
 powerCON Power In

SIZE / WEIGHT

Length: 13.2" (336mm)
 Width: 12.7" (322mm)
 Vertical Height: 23.6" (600mm)
 Weight: 55.0 lbs. (25 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 Max Power Consumption: pending
 -13°F to 113°F (-25°C to 45°C)

APPROVALS / RATINGS

CE Pending
 cETLus Pending

INSTALLATION

Rigging: Clamps (Not Included)
 Working Position: Flat Surface / Inverted (180°)


INCLUDED ITEMS

Omega Brackets
 3pin DMX Cable
 Safety Cable
 powerCON Cable

EWDMX WIRELESS DMX VERSION AVAILABLE


Platinum Profile LED™ with Internal Wireless DMX Receiver
 Special Order Item

PHOTOMETRIC DATA

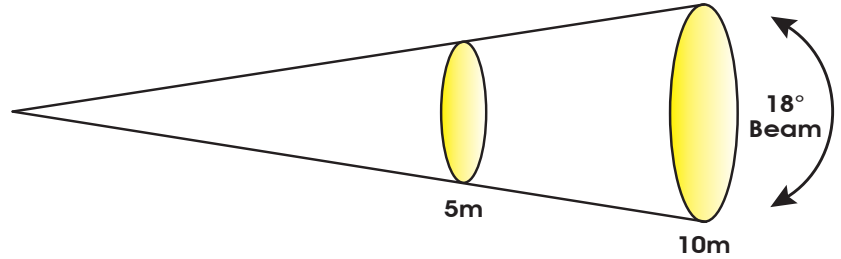

	m	ft	m	ft
Distance	5	16.4	10	32.8
Full ON	6,958 lux	646 fc	7585 lux	705 fc

DIMENSIONAL DIAGRAMS

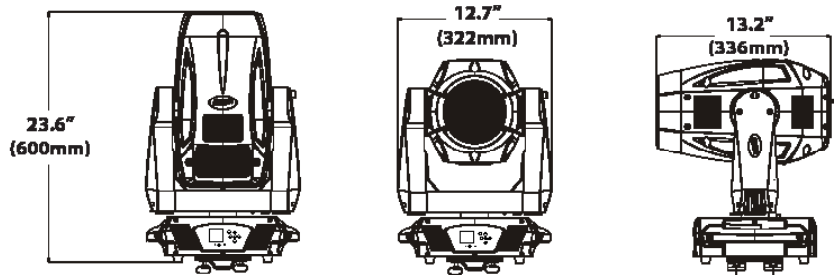

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
** pending **	Road Case For Platinum Profile LED™
ELO211	Eloader II™ Software Updater Box
EWDMXSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMXT	Wireless DMX Transmitter
EWDMXR	Wireless DMX Receiver
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC3PDMX10PRO	10 ft. (3m) 3pin PRO DMX Cable
AC3PDMX15PRO	15 ft. (4.5m) 3pin PRO DMX Cable
AC3PDMX25PRO	25 ft. (7.5m) 3pin PRO DMX Cable
AC3PDMX50PRO	50 ft. (15.2m) 3pin PRO DMX Cable
AC5PDMX10PRO	10 ft. (3m) 5pin PRO DMX Cable
AC5PDMX15PRO	15 ft. (4.5m) 5pin PRO DMX Cable
AC5PDMX25PRO	25 ft. (7.5m) 5pin PRO DMX Cable



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu