


Christie FHQ841-T

Multi-touch, ultra high-definition 84" display


Technical specifications		Christie FHQ841-T
Display technology	screen size (diagonal)	• 84"
	native resolution	• 3840 x 2160 (16:9)
	backlight	• Edge-lit LED
	LED lifespan	• 50,000 hrs (50% brightness)
	display orientation	• Landscape
	pixel pitch	• 0.48 x 0.48mm
	bezel size	• 46.1mm
	brightness	• 350 nits (cd/m ²) typical
	contrast ratio (full field)	• 1400:1
	viewing angle (CR 10:1)	• 178° h/v
	refresh rate	• 120Hz
	response time	• 5ms
	color space (CIE 1931)	• 72%
display colors	• 1.06 billion	
Signal	inputs	• HDMI (HDCP) x 2 • DVI-D • DisplayPort • VGA • Audio 3.5mm
Control	inputs	• RS-232
Power	input rating	• 100-240 VAC @ 50/60Hz
	power consumption	• 410W typical • 500W maximum • ≤1.0W standby
Environment	operating temperature	• 32-95°F (0-35°C)
	operating humidity	• 10-80% non-condensing
	storage temperature	• -4-140°F (-20-60°C)
Physical	size	• (WxHxD): 78.28 x 46.17 x 4.17" (1987.8 x 1172.8 x 106.0mm)
	weight	• 216lbs (98kg)
	panel mount locations	• VESA standard (WxH) 600 x 600mm
Features		• Tempered 5mm anti-glare glass • QuadHD resolution • High energy efficiency with ≤1.0W standby • Built in 10W x 2 speakers • Control with on-screen display (OSD) using infrared (IR) remote control • Power saving mode • Advanced image settings
Touch	technology	• High-resolution infrared
	simultaneous touches	• 10
	connection	• USB B
	response	• ≤ 20ms
Accessories		• Panel ships with remote control • VGA cable • USB 2.0 cable for touch • Regional power cord available separately
Warranty		• Three years parts and labor limited warranty • Contact an authorized Christie representative for full details of our limited warranty

Content and operating conditions can affect the useful life of the product. Please refer to the product user manual and Christie Operating Guidelines for Flat Panels, available at www.christiedigital.com


Right side view



Front view

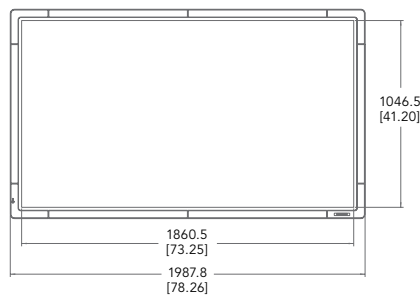

Back view

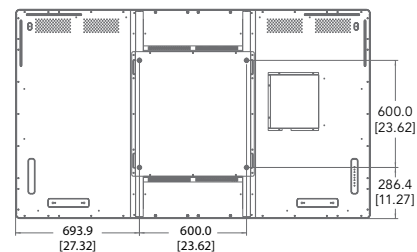

Corporate offices

Christie Digital Systems USA, Inc.
USA – Cypress
ph: 714 236 8610

Christie Digital Systems Canada Inc.
Canada – Kitchener
ph: 519 744 8005

Worldwide offices

Australia
ph: +61 (0) 7 3624 4888

Brazil
ph: +55 (11) 2548 4753

China (Beijing)
ph: +86 10 6561 0240

China (Shanghai)
ph: +86 21 6278 7708

Eastern Europe and
Russian Federation
ph: +36 (0) 1 47 48 100

France
ph: +33 (0) 1 41 21 44 04

Germany
ph: +49 2161 664540

India
ph: +91 (080) 6708 9999

Japan (Tokyo)
ph: 81 3 3599 7481

Korea (Seoul)
ph: +82 2 702 1601

Republic of South Africa
ph: +27 (0)11 510 0094

Singapore
ph: +65 6877 8737

Spain
ph: +34 91 633 9990

United Arab Emirates
ph: +971 4 3206688

United Kingdom
ph: +44 (0) 118 977 8000

Independent sales consultant offices

Italy
ph: +39 (0) 2 9902 1161

For the most current specification information, please visit www.christiedigital.com

Copyright 2014 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 3826 May 14

CHRISTIE®