


DIGITAL  
PROJECTOR

# PW9500




## Features

- Native WXGA (1280x800) Resolution
- 5,700 ANSI Lumens; 2,800:1 Contrast Ratio
- Powered Focus, Zoom & Lens Shift
- 7 Optional Lenses

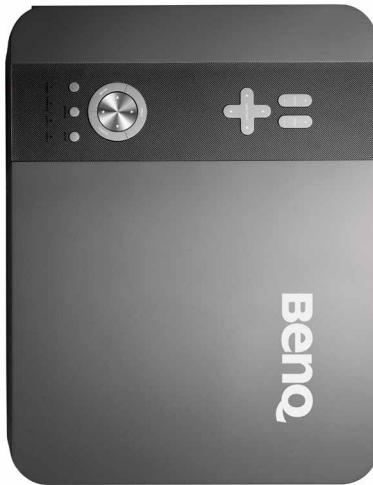

## Input and Output Terminals - Left Side View

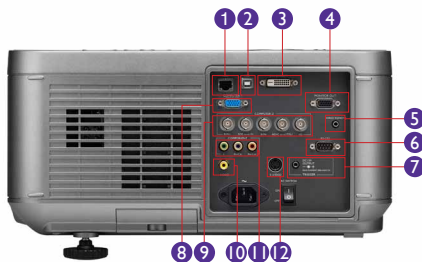

- |                             |                                 |
|-----------------------------|---------------------------------|
| 1 LAN (RJ45)                | 7 12V Trigger                   |
| 2 USB (Type B)              | 8 Computer 1 in (D-sub 15pin)   |
| 3 DVI-D in                  | 9 Computer 2 in (5BNC,R/G/B/HV) |
| 4 Monitor Out (D-sub 15pin) | 10 Component Video in (Y/Pb/Pr) |
| 5 Wired Remote              | 11 Composite Video in (RCA)     |
| 6 RS232 (DB-9pin)           | 12 S-Video in (Mini Din 4 pin)  |

## Specifications

Projection System	DLP®	
Native Resolution	WXGA(1280x800)	
Brightness	5,700 ANSI lumens (Dual lamp, Standard lens)	
Contrast Ratio	2,800:1	
Display Color	1.07 Billion Colors	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Image Size Diagonal	50"~300"	
Lamp Type	280W x 2	
Lamp(Normal/Economic Mode)*	2,000/2,500 hours	
Keystone Adjustment	Vertical ± 30 degrees	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	31K~92KHz	
Vertical Scan Rate	23~85Hz	
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM	
Interface	Computer 1 in (D-sub 15pin) x 1 Computer 2 in x 1 Monitor out (D-sub 15pin) x 1 DVI-D in x 1 Component Video in (Y/Pb/Pr) x 1 Composite Video in (RCA) x 1 S-Video in (Mini Din 4 pin) x 1 LAN (RJ45) x 1 (LAN Control) USB (Type B) x 1 (Download) 12V Trigger x 1 RS232 (DB-9pin) x 1 Wired Remote x 1 IR Receiver x 2 (Front+Rear)	
Dimensions (WxHxD)	20" x 7.7" x 15.3"	
Weight	36.3 lbs (Without lens)	
Power Supply	AC 220-240 V, 2.9A, 50 to 60 Hz	
Power Consumption	AC 220-240 V, 670W (Standby Power <0.5W)	
Audible Noise	39 /34 ; 35/ 32 db (Dual lamp normal / Single lamp normal)	
On-Screen Display Languages	List Languages	
Picture Mode	Presentation/Standard/Game/Movie/sRGB	
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable, 6 Segments Color Wheel	
Accessories (Optional)	Spare Lamp Kit: P/N 5J.JAM05.001 Ceiling Mount P/N: 5J.JAN10.001 Optional Lens: (see reference chart) • Wide Fix(5J.JAM37.011) • Ultra Wide (5J.JAM37.061) • Wide Zoom(5J.JAM37.021) • Standard(5J.JAM37.001) • Semi Long(5J.JAM37.051) • Long Zoom1(5J.JAM37.031) • Long Zoom2 (5J.JAM37.041)	
UPC Code / Part #	8400460-2965-4 / 9H.JAN77.26E	
Limited Warranty	3 Years Parts & Labor / 1 Year or 2,000 hours of lamp life	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

BenQ Lens	P/N	Zoom Ratio	WXGA	Marketing Model
STD Lens	5J.JAM37.001	1.3x	1.81~2.38:1	PZL-001
Wide Fix	5J.JAM37.011	Fixed	0.8:1	PFL-011
Wide Zoom	5J.JAM37.021	1.4x	1.31~1.87:1	PZL-021
Long Zoom 1	5J.JAM37.031	1.5x	3.76~5.64:1	PZL-031
Long Zoom 2	5J.JAM37.041	1.55x	5.56~8.57:1	PZL-041
Semi Long Zoom	5J.JAM37.051	1.65x	2.33~3.86:1	PZL-051
Ultra Wide Zoom	5J.JAM37.061	1.25x	0.75~0.93:1	PZL-061

PW9500 11-19-13-BQus



BenQ America Corp.  
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.



# PW9500 Digital Projector

## Distance Chart

Standard - PZL-001 (5J.JAM37.001)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	3.13-4.12
100	3.93-5.17
120	4.72-6.22
150	5.92-7.79
200	7.92-10.40
300	11.91-15.64
400	15.9-20.88
500	19.9-26.11

Wide Fix - PFL-011 (5J.JAM37.011)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	1.39
100	1.75
120	2.11
150	2.64
200	3.54
300	5.33
400	7.13
500	8.92

Wide Zoom - PZL-021 (5J.JAM37.021)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	2.27-3.25
100	2.85-4.08
120	3.43-4.90
150	4.3-6.14
200	5.75-8.2
300	8.65-12.33
400	11.55-16.45
500	14.45-20.58


Ultra Wide - PZL-061 (5J.JAM37.061)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	1.29-1.60
100	1.61-2.00
120	1.93-2.40
150	2.42-3.00
200	3.23-4.00
300	4.84-6.00
400	6.46-8.01
500	8.07-10.01

Semi Long - PZL-051 (5J.JAM37.051)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	4.02-6.71
100	5.05-8.41
120	6.07-10.10
150	7.61-12.65
200	10.17-16.89
300	15.30-25.38
400	20.42-33.86
500	25.55-42.35

Long Zoom1 - PZL-031 (5J.JAM37.031)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	6.48-9.80
100	8.14-12.29
120	9.79-14.77
150	12.27-18.50
200	16.41-24.71
300	24.68-37.13
400	
500	

Long Zoom2 - PZL-041 (5J.JAM37.041)	
Screen Size (Inches)	PW9500- Projection Distance (m)
80	9.60-15.13
100	12.08-18.99
120	14.55-22.85
150	18.27-28.63
200	24.45-38.28
300	36.83-57.56
400	32.95-49.55
500	41.22-61.95

## Ceiling Mount Chart

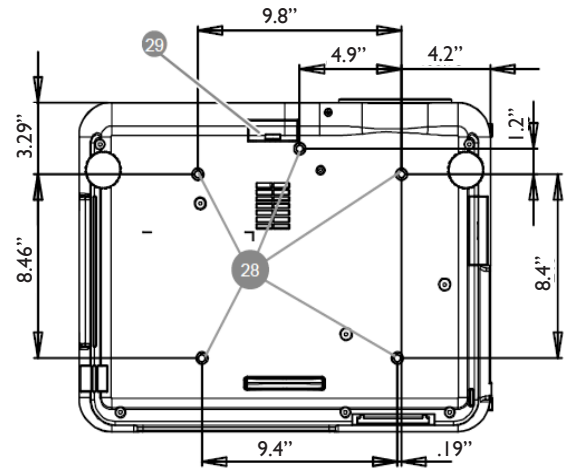

Units: inch

## Dimensions

