



NEODYMIUM SERIES

KAPPALITE™ 3015LF

Recommended for professional audio and bass in vented enclosures.



SPECIFICATION

Nominal Basket Diameter	15.0", 381 mm
Nominal Impedance*	8 Ω
Power Rating**	
Watts	450 W
Music Program	900 W
Resonance	44 Hz
Usable Frequency Range	40 Hz – 1.5 kHz
Sensitivity***	98.4 dB
Magnet Weight	11 oz.
Gap Height	.365", 9.3 mm
Voice Coil Diameter	3.0", 76 mm

THIELE & SMALL PARAMETERS*

Fs	44 Hz
Re	5.50 Ω
Le	0.93 mH
Qms	8.97
Qes	0.48
Qts	0.46
Vas	5.33 cu.ft., 150.90 liters
Vd	846.0 cc
Cms	0.14 mm/N
BL	17.00 T-M
Mms	93 grams
EBP	90
Xmax	9.60 mm
Sd	881.1 cm ²
Xlim	17.0 mm

MOUNTING INFORMATION


Recommended Enclosure Volume	
Sealed	N/A
Vented	99.00–195.00 liters, 3.50–6.90 cu.ft.
Driver Volume Displaced	0.090 cu.ft., 2.56 liters
Overall Diameter	15.32", 389.1 mm
Baffle Hole Diameter	14.03", 356.4 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	7.25", 184.2 mm
Net Weight	8.60 lbs , 3.90 kg
Shipping Weight	10.70 lbs , 4.85 kg

MATERIALS OF CONSTRUCTION

- _____ Copper voice coil
- _____ Kapton former
- _____ Neodymium magnet
- _____ Vented core
- _____ Die-cast aluminum basket/heatsink
- _____ Treated paper cone
- _____ Cloth cone edge
- _____ Treated paper dust cap



FREQUENCY RESPONSE & IMPEDANCE CURVE*

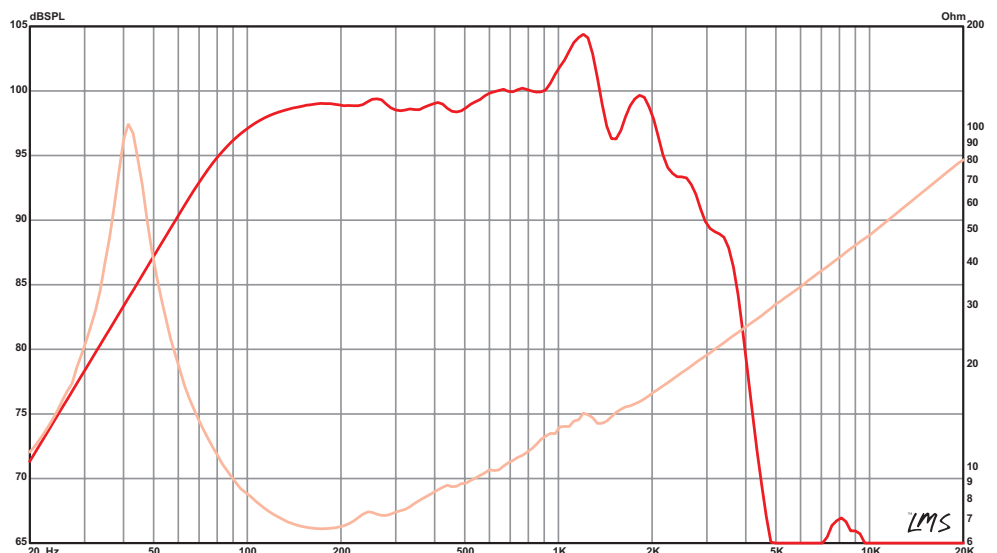

LEARN MORE AT EMINENCE.COM