



# XLT47E

## TWO-WAY TRAPEZOIDAL LOUDSPEAKER SYSTEM


**PRELIMINARY SPECIFICATIONS**

### APPLICATIONS:

- Sound Reinforcement / Portable PA
- Clubs
- Houses of Worship
- Health Clubs
- Sport Facilities
- Industrial A/V
- Keyboard Systems

### FEATURES:

- 1" Titanium HF Driver with HF Level Switch
- Ferrofluid-cooled Dual 15" LF
- Tall Trapezoidal Enclosure For HF Projection
- Switchable Passive/Biamp Modes
- PowerSense™ DDP Circuit with Front/Rear Indicators
- Steel Bar-Handles and Input Panel
- Black Paint Exterior

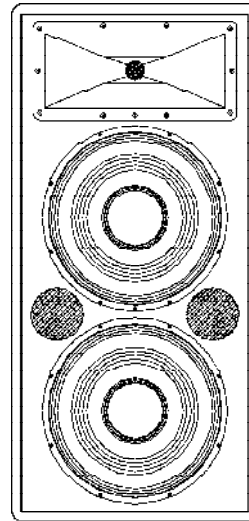

### DESCRIPTION

The XLT47E is a trapezoidal, two-way full-range loudspeaker system. High-efficiency and clear, articulate output is combined with a smooth frequency response. A 1" titanium diaphragm HF compression driver couples to a large 90 x 40 degree Pattern Control horn. Two Ferrofluid-cooled 15" woofers provide prodigious bass output and high power handling. These components are matched to a heavily braced, optimally tuned, bass-reflex enclosure. Its 42" height can project sound over audiences in many situations that would normally require a stand.

The XLT47E's robust crossover seamlessly integrates the acoustic outputs of the high and low frequency components. The PowerSense™ DDP (Dynamic Driver Protection) circuit monitors the power input to each driver and absorbs excessive power. A rear panel LED as well as front visible indication illuminate when the PowerSense™ circuitry is active, warning the operator of excessive power input. The crossover is built on a steel input panel and uses 250V film capacitors, precision inductors and high-grade circuit boards.

A Passive/Biamp switch allows easy switch-over between two modes of operation. In Passive mode a single amplifier channel is used to power the loudspeaker. In Biamp mode two amplifier channels are used to separately power the HF and LF sections. The frequency division is provided by the internal crossover, so no external electronic crossover is needed. An HF Level switch can "voice" the system for different musical styles or room acoustics.

The XLT47E has two Neutrik Speakon NL4MP jacks and two 1/4" phone-type jacks. In Passive mode, all jacks are wired in parallel for easy daisy-chaining of two systems. The 4-pin Neutrik connector is used in Biamp mode for both the HF and LF inputs. The trapezoidal shape easily allows arraying two or more XLT47Es for wider coverage and increased acoustic output. For applications requiring extreme bass output, an XLT55E dual 15" subwoofer can be added.

The recessed steel bar-handles and black paint exterior make this road-worthy system attractive, rugged and easily transportable. It has six 3/8"-16 threaded captive-nut engineered rigging points on its top and bottom.

### SPECIFICATIONS

#### Loudspeaker Type:

Two-way, Full-Range, Bass-Reflex System

#### Frequency Response:

45 Hz to 18 kHz

#### Power Handling:

Passive: 400W RMS; 1000W Program

Biamp LF: 400W RMS; 1000W Program

HF: 50W RMS; 125W Program

#### Sensitivity (1 Watt / 1 Meter):

101 dB SPL

#### Nominal Dispersion:

90° Horizontal, 40° Vertical

#### Nominal Impedance:

4 ohms

#### Crossover Frequency(s):

1.5 kHz

#### Components:

One 1 inch Titanium compression driver on a

Pattern control horn

Two 15 inch woofers, Ferrofluid-cooled

#### Speaker Protection:

PowerSense DDP

#### Input Connectors (All wired in parallel):

Two Neutrik Speakon

Two 1/4 inch phone jacks

#### Enclosure Material and Finish:

Black painted 13-ply Baltic birch plywood

16 guage perforated steel grille

#### Dimensions:

Height: 41.5 inches (1054 mm)

Width - face: 19.75 inches (502 mm)

Width - rear: 13.25 inches (337 mm)

Depth: 18 inches (457 mm)

#### Weight:

98 lbs. (44.5 kg.)

#### Shipping Weight:

110 lbs. (49.9 kg.)




# XLT47E

## TWO-WAY TRAPEZOIDAL LOUDSPEAKER SYSTEM


### FREQUENCY RESPONSE

PASSIVE MODE

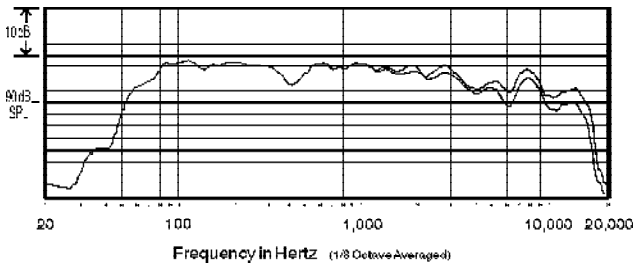


### IMPEDANCE

PASSIVE MODE

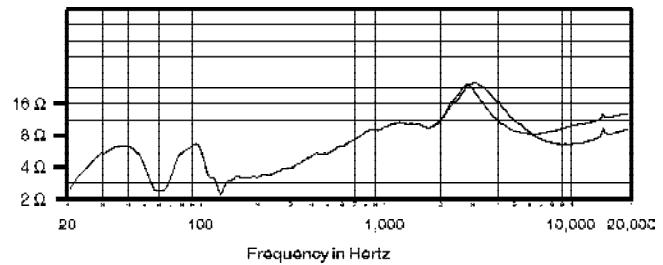


### FREQUENCY RESPONSE

BIAMPLIFIED MODE

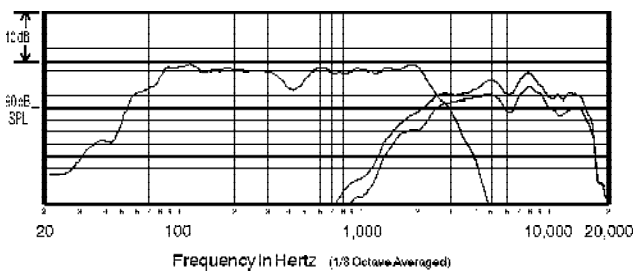


### IMPEDANCE

BIAMPLIFIED MODE

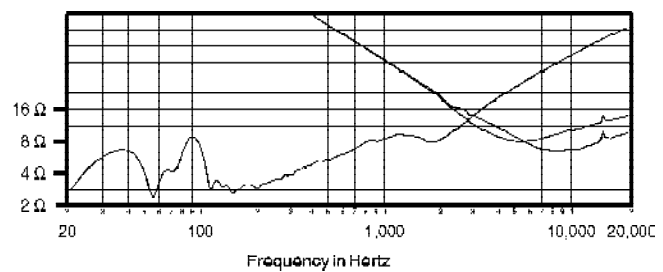

### DIMENSIONS

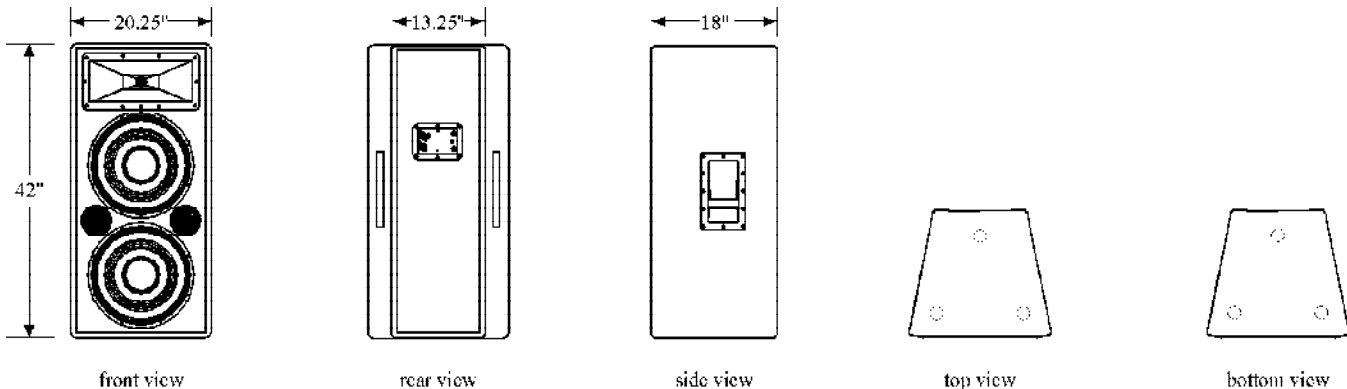

### ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The loudspeaker system shall be a direct-radiating, bass-reflex design with two Ferrofluid-cooled 15 in. woofer and one 1 in. titanium diaphragm compression driver coupled to a Pattern Control horn. All components shall be connected to an integral crossover/protector. The crossover/protector shall be a two-way design with 12 dB/octave low pass at 1.5 kHz to the woofer and 12 dB/octave high-pass at 1.5 kHz to the high-frequency driver. The crossover shall utilize a steel input panel with Neutrik NL4MP and 1/4 in. jacks, high quality 250V film capacitors, inductors, high positive current coefficient resistors (HPCCR's) for component protection and front/rear overcurrent indicators. A Passive/Biamp switch shall allow operation using one or two amplifier channels without need of an electronic crossover. An HF level control shall be switchable between Flat and +4 dB. The loudspeaker enclosure shall be constructed of well-braced, black-painted, 3/4 inch (18mm) 13-ply Baltic birch, a 16 gauge perforated steel grille and two steel, recessed bar handles. The system shall meet the following performance criteria: Amplitude response of 45 Hz to 18,000 Hz, 400W RMS power handling, 101 dB sensitivity at 1 meter with one watt applied. The horn coverage pattern shall be 90° H x 40° V. The loudspeaker shall be 41.5" (1054 mm) H x 19.75" (502 mm) W (front) x 13.25 in. (337 mm) W (rear) x 18 in. (457 mm) D and weigh 98 lb. (44.5 kg). The system impedance shall be 4 ohms nominal.

### LIMITED WARRANTY

Community XLT/E loudspeaker systems are guaranteed to be free from defects in materials and workmanship for a period of five years from the original date of sale. Since the warranty applies to the product, the remainder of the warranty period will be automatically transferred to any subsequent owner. Only failures caused by defects in materials and workmanship are covered, not failures caused by abuse, accident, modification, improper handling/installation, or repairs made without factory authorization or by other than an authorized Community Field Service Station. Products covered by this warranty will be repaired or replaced at the option of Community, without charge for materials or labor, provided all the terms of this warranty have been met. This statement is a condensed version of the Community Product Warranty, intended for quick reference only. For complete warranty information, consult the product owners manual or call (610) 876-3400 for a copy.

### PRELIMINARY SPECIFICATIONS

XLT47E Page 2 of 2

## COMMUNITY PROFESSIONAL LOUDSPEAKERS

333 East Fifth Street Chester, PA 19013-4511 USA Phone (610) 876-3400 Fax (610) 874-0190

9709032A