



## ELAR EXTQW BAR HP™

SKU# **ELA961**

The IP65 Rated ELAR EXTQW BAR HP™ features (12) 5W QUAD RGBW Color LEDs, a 25° beam angle, variable color and strobe effects, 3 DMX channel modes, flicker free operation for TV and FILM, 3pin in/out DMX and 4pin power in/out connections, (2) integrated adjustable mounting brackets, linkable power for up to (7) units at 120V and (14) units at 240V, 90W max power consumption, programmable IR remote (sold separately) and a multi-voltage universal auto switching power supply (100-240v).



### FEATURES

- 12 x 5W Quad Color (RGBW) LEDs**
- 25° Beam Angle**
- IP65 Rated**
- Die-Cast Aluminum Housing / Tempered Glass**
- Variable Color & Strobe Effects**
- 3 DMX Channel Modes**
- Flicker Free Operation for TV and FILM**
- 90W Max Power Consumption**
- Power Link Multiple Units**
- Integrated Adjustable Mounting Brackets (x2)**
- IR Remote Programmable (sold separately)**



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | [www.elationlighting.com](http://www.elationlighting.com) | [info@elationlighting.com](mailto:info@elationlighting.com)

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | [www.elationlighting.eu](http://www.elationlighting.eu) | [info@elationlighting.eu](mailto:info@elationlighting.eu)

**PRODUCT SPECIFICATIONS**

**FEATURES**

25° Beam Angle  
 IP65 Rated  
 Die-Cast Aluminum Housing / Tempered Glass  
 IR Remote Programmable  
 Flicker Free Operation for TV and FILM

**SOURCE**

12 x 5W QUAD Color (RGBW) LEDs  
 50,000 Hour Average Life

**PHOTOMETRIC DATA**

1430 LUX (133 FC) @9.8 ft. (3m) 25° Full ON

**EFFECTS**

Color + Variable Strobe Macros  
 Electronic Dimming: 0% - 100%

**COLOR**

RGBW (Red, Green, Blue, White)

**CONTROL / CONNECTIONS**

3 DMX Channel Modes (7/11/51)  
 3pin DMX In/Out  
 4pin Power In/Out  
 Power Link Multiple Units - (7) at 120V (14) at 240V

**SIZE / WEIGHT**

Length: 39.4" (1000mm)  
 Width: 3.5" (90mm)  
 Vertical Height: 7.1" (181mm)  
 Weight: 11.5 lbs. (5.2kg)

**ELECTRICAL**

AC 100-240V - 50/60Hz  
 90W Max Power Consumption

**INSTALLATION**

Rigging: Integrated Adjustable Mounting Brackets (x2)  
 Working Position: Any (360°)


**INCLUDED ITEMS**

- (1) 6.5 ft. (2m) 4pin Female to Edison Power Cable
- (1) 5.5 ft. (1.7m) 3pin Male to 3pin Female DMX Cable
- (1) 5.5 ft. (1.7m) 3pin Female to 3pin Male DMX Cable
- (1) Bag of DMX End Caps
- (2) Mounting Brackets


**PHOTOMETRIC DATA**

RED LEDs	118 FC / 1270 LUX	61 FC / 660 LUX	36 FC / 387 LUX	23 FC / 243 LUX	15 FC / 164 LUX
GREEN LEDs	158 FC / 1700 LUX	71 FC / 765 LUX	39 FC / 415 LUX	24 FC / 260 LUX	17 FC / 179 LUX
BLUE LEDs	121 FC / 1300 LUX	65 FC / 700 LUX	38 FC / 410 LUX	23 FC / 251 LUX	16 FC / 171 LUX
WHITE LEDs	134 FC / 1440 LUX	66 FC / 710 LUX	37 FC / 400 LUX	23 FC / 250 LUX	16 FC / 168 LUX
FULL ON	514 FC / 5530 LUX	248 FC / 2670 LUX	133 FC / 1430 LUX	88 FC / 950 LUX	60 FC / 647 LUX

LUX x 0.0929 = FC

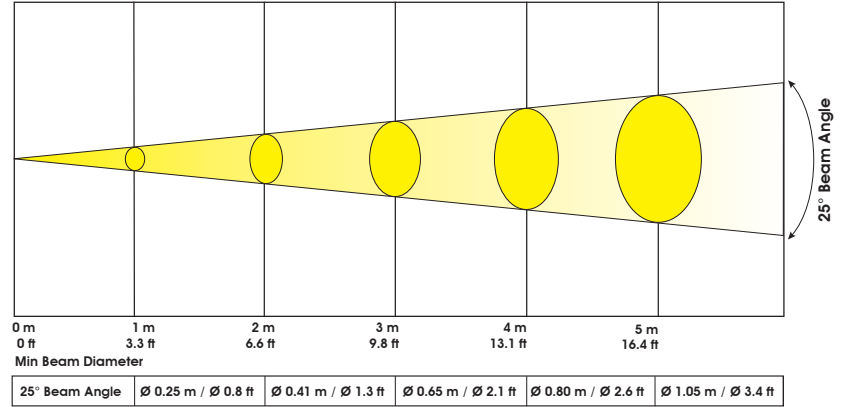

**DIMENSIONAL DIAGRAM**

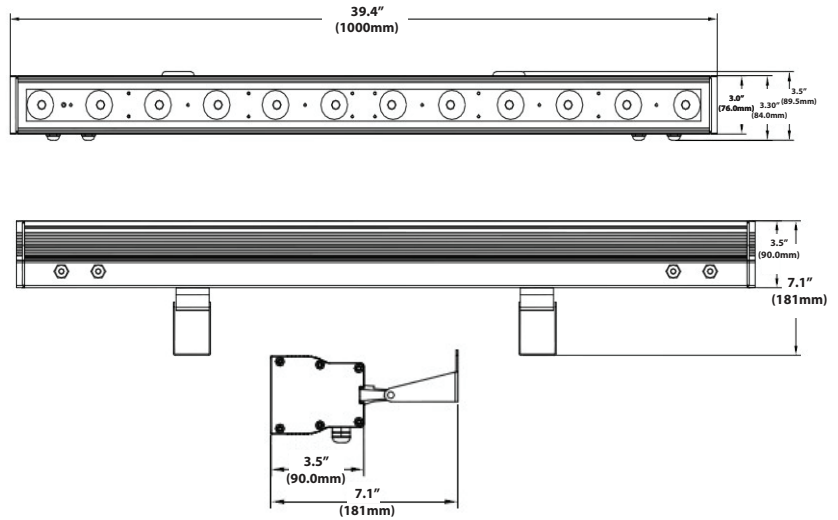

**OPTIONAL ACCESSORIES**



**ELAR WR II**  
**Infrared Wireless Remote Controller**  
**Required To Program Fixture**  
**\*Not Included Purchased Separately**

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
ELA958/3MPEC	3m (4pin) Power Ext/Link Cable
ELAR 3C-1M	1m (3pin) Signal Ext Cable
ELAR 3C-5M	5m (3pin) Signal Ext Cable
ELAR WR II	Infrared Wireless Remote Controller Required To Program Fixture <b>*Not Included Purchased Separately</b>



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu