

# CMS SUB

## Professional analog subwoofer

11" (27cm) Polyglass cone subwoofer  
Great neutrality for precise adjustment of the bass EQ.


High excursion and /  
high efficiency subwoofer  
Minute detail retranscription for  
precise adjustment of the signal  
compression.

Large front laminar port  
Constant tone balance,  
optimum integration in the  
smaller studios.

Numerous settings (low-pass filter +  
sound level + entirely adjustable phase,  
phase reversal,  
Footswitch input, MUTE)  
Excellent acoustic coupling between  
subwoofer and monitors. Turn to a 2.1  
configuration and keep your habits and  
marks you acquired with a 2.0 system!


300W rms BASH®  
technology amplifier  
The class AB amplification  
quality combined with  
class D efficiency.

LFE / left + right inputs /  
left + right outputs  
Simplified connections and total  
upgrade system possibility  
(upgrade from a 2.1 configuration  
to a 5.1 without any  
extra equipment).

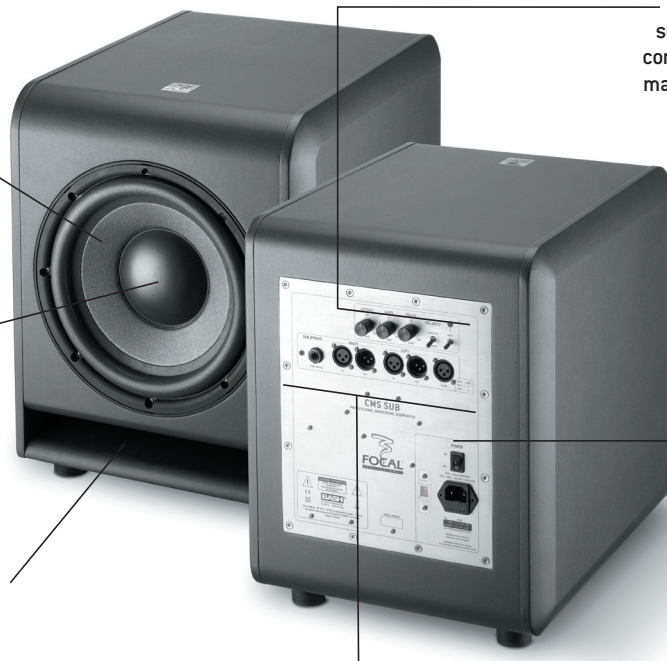

### Supplied accessory

Removable grille



**FOCAL**  
PROFESSIONAL

# CMS SUB

## Professional analog subwoofer

### Technical specifications

System	CMS SUB	
• Frequency response (+/- 3dB)	30Hz - 250Hz	
• Maximum SPL	113dB SPL (peak @ 1 m)	
Electronic section		
• Input	- Type/Impedance - Connector - Sensitivity	Left, Right, LFE Electronically balanced / 10kOhms Female 3 pins XLR Variable
• Output (to satellites)	- Connector	Left, Right Male 3 pins XLR in parallel on inputs
• Amplifier	300W rms, BASH® technology	
• Internal processing and functions	- Subwoofer section	Left + Right mono summation LFE + lo-passed mono sum 24dB/octave variable lo-pass filter Phase adjustment Polarity
• User controls	Sub level (sensitivity) adjustment Lo-pass frequency adjustment Phase adjustment Polarity switch Mute External Mute (controlled by external footswitch)	
• Indicators (LED's)	Power on Mute External Mute	
• Power supply	- Mains voltage - Connection	230V (T1.6AL fuse rating) or 115V (T3.15AL fuse rating) IEC inlet and detachable power cord
Transducers		
• Subwoofer	Polyglass, high excursion Focal, 270mm (11") drive unit	
Cabinet		
• Construction	22mm MDF panels with internal braces	
• Finish	Dark grey vinyl	
• Dimensions (HxWxD)	435.5mm x 366mm x 440mm (17.1" x 14.4" x 17.3")	
• Weight	23kg (50.7lb)	