


SUMMARY

The Altman Pegasus8 Fresnel is an 8" white output LED Fresnel that is both Mains Dimmable and DMX controlled all in one luminaire. Pegasus replicates the soft light output that is expected from a Theatrical or Studio Fresnel. Under 150 Watts the 8" Pegasus Fresnel meets the output of its 750 watt incandescent counterpart.

Under Mains Dim Control these fresnels can plug directly into your theatrical phase cut dimmers whether they are forward or reverse phase, and have been specially designed to replicate the smooth dimming curve of their incandescent twin. A 120 /230 switch on the back of unit allows you to set the dimming curve for both 120 volt and 230 volt dimming systems.

If your lighting system consists of constant power and DMX data then Pegasus is also right choice for you. With the flip of a switch Pegasus converts from Mains Dimmable to a DMX / RDM controlled unit.

Pegasus is available in a number of different color temperatures from 2,700k, 3000k, 4000k, and 5000k. Pegasus boasts a very high CRI, >90, and can be used with standard theatrical gel as well as theatrical Gels that have been formulated for LED's.

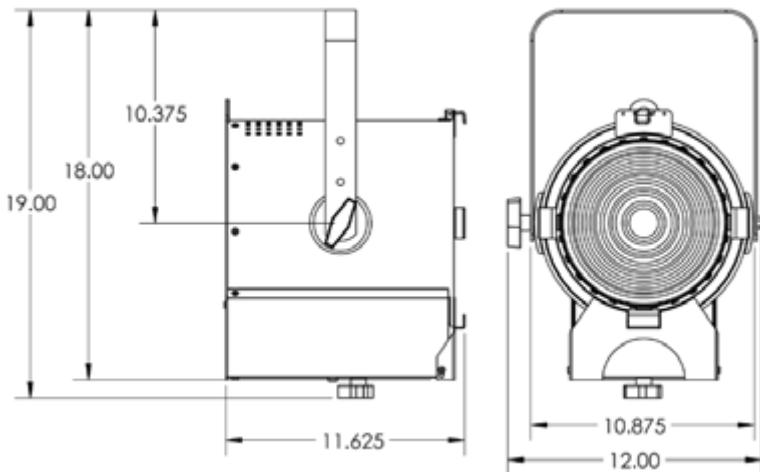

FEATURES

- Delivers the output performance of its Incandescent complement
- Mains Dimmable or DMX Controlled
- Available in both 6" and 8" models
- Available in four (4) different Color temperatures
- Power Con & DMX in /thru connections
- Fully RDM Compliant
- Electronic Universal power supply 100-240VAC
- Fully homogenized beam
- High resolution digital dimming for both Mains Dimmable and DMX control
- 10-50 degree spot to flood beam spread
- 50,000 hours of life expectancy
- All Metal Construction
- C-Clamp, Color Frame and Safety Cable included
- Proudly made in the USA

SPECIFICATIONS

Output : >11,620 Lumens LED Color Temp. Dependent

Materials: Construction employs all corrosion-resistant materials and hardware.

Control: Mains Dimmable and DMX (Full RDM Compliance)

Light Engine: 140W - Available in 2700K, 3000K, 4000K, and 5000K White.

Lumens/Watt: 83.0 LED Color Temp Dependent

Quiescent Load: 12W @120VAC (Only Under DMX Control) 0.1A

CRI: >90

Input Voltage: 100-240 VAC 50/60hz

1.16A @120VAC

0.59A @ 240VAC

Inrush Current: 15Apk Max 1/2 Cycle @ 230VAC

Cooling: Silent Active Cooling (<19dBa @ 0.5 M)

Ambient Temperature: 0 to 40 degrees C (32 to 104 degrees F)

BTU's/Hr: 425.5

Beam Angle: Ranging from 10 to 50 degrees.

Finish: Black, White, or Silver (Custom colors available)

Weight: 14.2 Pounds (5.22Kg.) w/ C-Clamp and Yoke included


Rating: ETL, cETL and CE PENDING

Model	Description
PEG8-**-***	Pegasus 8 Inch LED Fresnel
** (CCT)	Add the following code for Emitter CCT: 2K, 3K, 4K, & 5K, (Nb.2K=2700 Kelvin)
*** (Body Color)	Add the following code for Body Color: B=Black, W=White, S=Silver, C=Custom

ACCESSORIES

Accessories P/N	Description
510 (Included)	Malleable Iron Pipe Clamp
8-CF (Included)	Color Frame
SC-36-BK (Included)	36" Black Safety Cable with Spring Clip
PCL-PBG-12* (Included)	5' 20A PowerCON With Edison Connector
8-BD-4	4-Way Barn Door
8-SN	Snoot
PCL-2P&G-12-5-*	5' 20A PowerCON with Stage Pin Connector
PCL-TLG-12-5-*	5' 20A PowerCON with L5-20P Twist Lock Connector
PCL-BARE-12-5-*	5' 20A PowerCON with Bare End Lead
PCTJ-12-5-*	5' 20A PowerCON to PowerCON

*=W for White Cable, Black Cable is Standard and no suffix is required

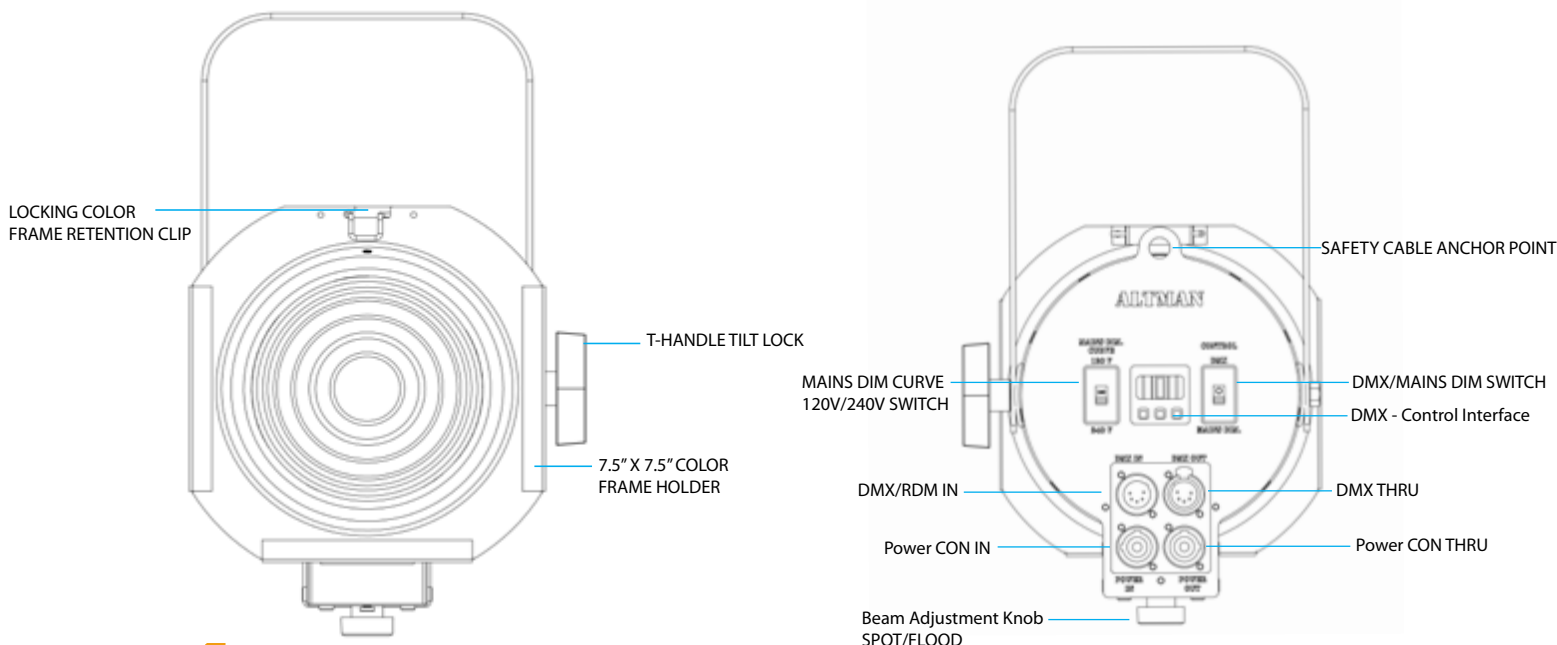

PHOTOMETRIC PERFORMANCE

Spot @ 10 Degrees

Distance	5'-0"	10'-0"	15'-0"	20'-0"
Diameter	1'-6"	3'-2"	4'-7"	6'-3"
2,700 K	2695	673	299	168
3,000 K	2873	718	319	179
4,000 K	3168	792	352	198
5,000 K	3368	842	374	210

Medium @ 30 Degrees

Distance	5'-0"	10'-0"	15'-0"	20'-0"
Diameter	3'-2"	6'-5"	9'-6"	12'-9"
2,700 K	902	226	100	57
3,000 K	962	241	107	60
4,000 K	1060	265	118	67
5,000 K	1127	262	125	71

Wide @ 50 Degrees

Distance	5'-0"	10'-0"	15'-0"	20'-0"
Diameter	5'-0"	10'-0"	15'-0"	20'-0"
2,700 K	286	75	33	18
3,000 K	303	78	35	19
4,000 K	335	85	37	21
5,000 K	360	90	42	23

Note: All measurements are shown in feet / inches and footcandles.
To convert from foot candles (fc) to Lux (Lx) multiply fc by 10.76.