



MSR Hot Restrike

MSR 575 HR 1CT

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Characteristics

System Description	Hot Restrike
Cap-Base	G22
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Theatre
Life to 50% failures	1000 hr
EM	
Non-household	For professional use only-not for domestic use
Symbol	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	90 Ra8
Color Temperature	6000 K
Color Temperature Technical	6025 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	328 -
Luminous Flux Lamp EM	40000 (min), 49000 (nom) Lm
Luminous Efficacy Lamp EM	85 Lm/W

• Electrical Characteristics

Lamp Wattage	575 W
Lamp Wattage Technical	575 W
Lamp Current	6.95 A

Ignition Supply Voltage	207 (min) V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions

Overall Length C	145 (max) mm
Diameter D	30 (max) mm
Width F	41 (min), 42 (nom), 43 (max) mm
Light Center Length L	69 (min), 70 (nom), 71 (max) mm
Arc Length O	7.0 mm

• Product Data

Order code	928097705115
Full product code	928097705115
Full product name	MSR 575 HR 1CT
Order product name	MSR 575 HR 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291221050
Bar code on outerbox - EAN3	8718291221067
Logistic code(s) - 12NC	928097705115
Net weight per piece	0.100 kg

PHILIPS


MSR Hot Restrike

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and


remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

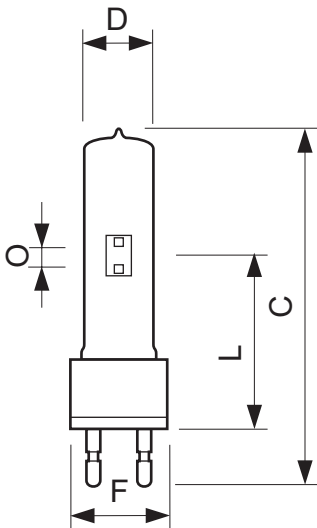


MSR 575 HR 1CT


Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 575 HR	-	-	-	145	30	-	41	42	43	69	70	71	7.0



Photometric data

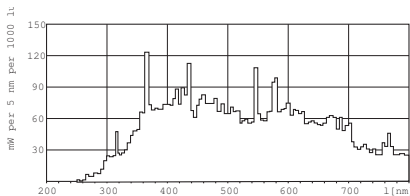

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

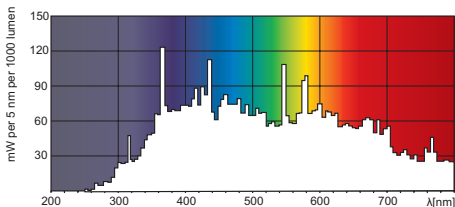

MSR Hot Restrike



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, September 27
data subject to change