

# Source Four XT HID Zoom Half Shield Installation Instructions

The Source Four XT HID Zoom Half Shield is used to provide glare control at specific angles to the fixture.



## **WARNING:**

- **Do not use the fixture with a damaged power lead. If the power lead (cordset) is damaged, it must be replaced.**
- **Do not expose the interior of the fixture to moisture. Do not stand in water while installing or servicing the fixture.**

**Failure to follow these warnings can result in serious injury or death.**

## Installation



## **WARNING:**

- **Do not use the fixture if glass lens is deeply scratched or cracked. Damaged lenses must be replaced.**
- **Do not mount the fixture on or near combustible surfaces.**


**Failure to follow these warnings can result in serious injury or death.**

The Half Shield can be mounted in four positions on the front of the fixture. It can also be combined with the External Media Holder. In this case, the Half Shield is installed last. The Half Shield is provided with four stainless steel hex screws for attaching to the fixture.


Reference *Source Four XT HID Installation Instructions* and *Source Four XT HID External Media Holder Installation Instructions* for information about electrical requirements and installing the fixture. Both instructions are available for download at [www.etccconnect.com](http://www.etccconnect.com).

### **To install the Half Shield:**

- Step 1: Face the shallow side of the shield toward the object you are trying light, with the tallest side of the shield providing glare control away from the lighted object.
- Step 2: Align the Half Shield with the four mounting holes on the front ring of the fixture. Refer to the illustration on the next page.
- Step 3: Secure the Half Shield with the four hex screws.

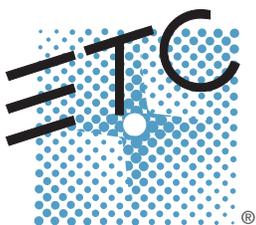


Corporate Headquarters ■ 3031 Pleasant View Road, P.O. Box 620979, Middleton, Wisconsin 53562-0979 USA ■ Tel +608 831 4116 ■ Fax +608 836 1736  
London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000  
Rome, IT ■ Via Pieve Torina, 48, 00156 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +44 (0) 20 8752 8486  
Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00  
Hong Kong ■ Rm 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325  
Service: (Americas) [service@etccconnect.com](mailto:service@etccconnect.com) ■ (UK) [service@etceurope.com](mailto:service@etceurope.com) ■ (DE) [techserv-hoki@etccconnect.com](mailto:techserv-hoki@etccconnect.com) ■ (Asia) [service@etcasia.com](mailto:service@etcasia.com)  
Web: [www.etccconnect.com](http://www.etccconnect.com) ■ Copyright © 2011 ETC. All Rights Reserved. ■ Product information and specifications subject to change. ■ ETC intends this document to be provided in its entirety.  
7065M2150 Rev A ■ Released 2011-08

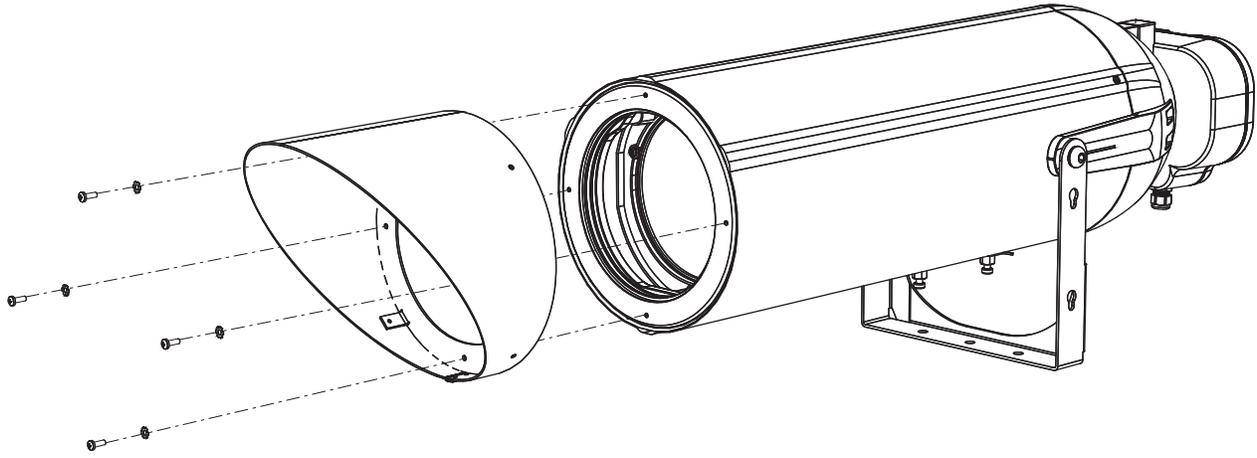

Half Shield Without other Accessories

**To install the Half Shield with the External Media Holder:**

- Step 1: Position the External Media Holder on the front ring of the fixture.
- Step 2: Face the shallow side of the Half Shield toward the object you are trying light, with the tallest side of the shield providing glare control away from the lighted object.
- Step 3: Align the Half Shield and External Media Holder screw holes with the four mounting holes on the front ring of the fixture.
- Step 4: Secure the Half Shield and External Media Holder with the four hex screws.

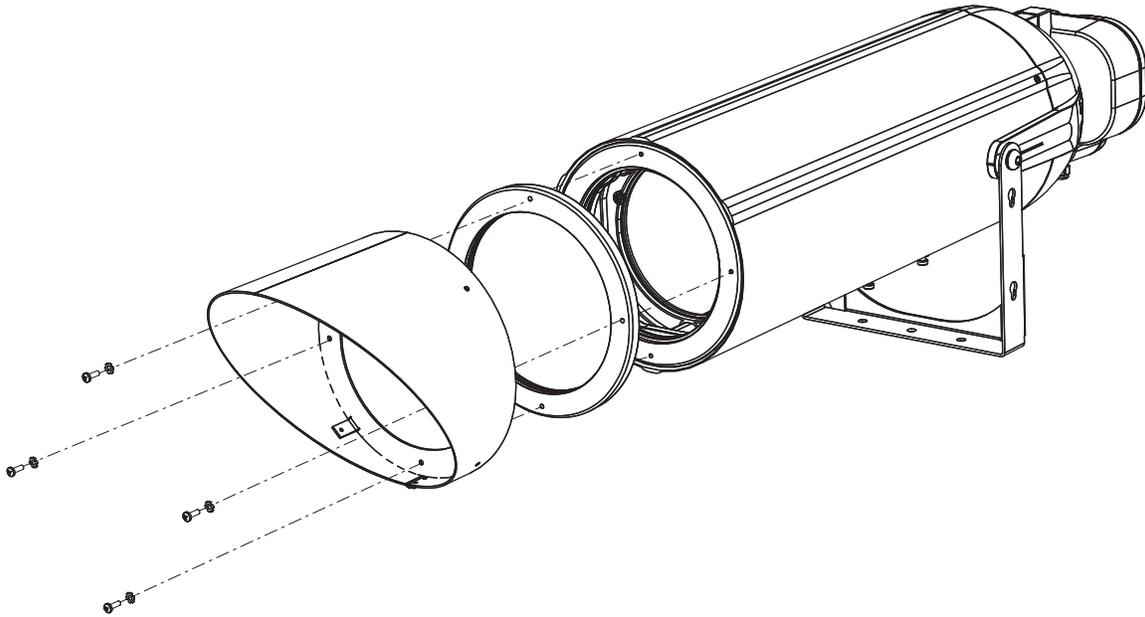

Half Shield with External Media Holder



**NOTE:** The Half Shield can be installed on top of the External Media Holder with one set of screws. Reference Source Four XT HID Zoom External Media Holder Installation Instructions.